

REMOTESENSING & GIS

for

LANDSLIDE STUDIES

Unit-2

Dr. J. SARAVANAVEL

Assistant Professor

Department of Remote Sensing

Bharathidasan University

Tiurchirappalli, Tamil Nadu


Email: saravanavel@bdu.ac.in

LANDSLIDES

- Landslide is a major geological hazard, which poses serious threat to human population and various other infrastructures like highways, rail routes and civil structures like dams, buildings and other structures
- A Landslide is the downward and outward movement of slope forming materials (Varnes 1953), composed of rock, soil, artificial fills (dumping) or a combination of all these along the surface of separation by falling, sliding, flowing under a fast or slow rate, but under the action of gravitational force and where the triggering factor may be natural or anthropogenic

- The word 'Landslide' particularly represents only a type of movements that is slide. However, it is generally used as a term to cover all the types of land movements including falls, creep, spreads, flows and other complex movements.
- A correct term to represent all these movements may be 'mass movement' or 'mass wasting'. However, the term 'landslide' has been accepted and is being used commonly around the world as a synonym of 'mass wasting'.

Morphology of Landslide

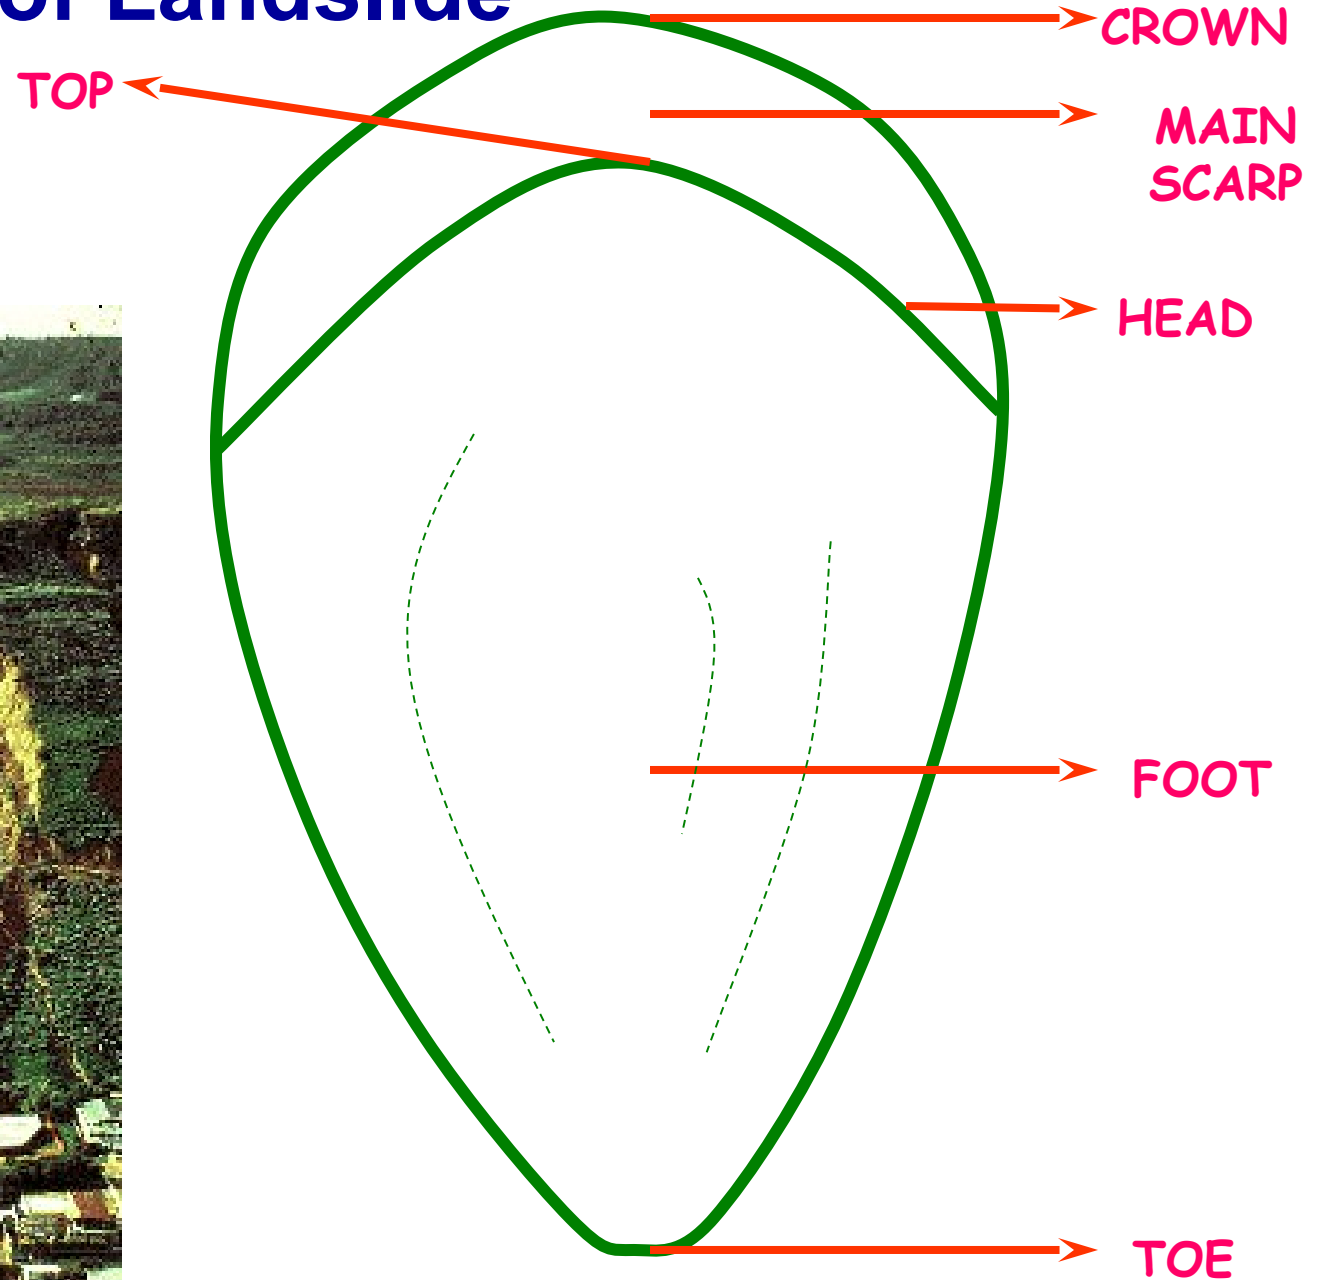


A diagram of a foot, likely a shoe last, with several anatomical labels and arrows pointing to specific parts. The labels are: CROWN (pointing to the top of the foot), MAIN SCARP (pointing to the main curve of the foot), HEAD (pointing to the ball of the foot), TOP (pointing to the top of the foot), FOOT (pointing to the sole of the foot), and TOE (pointing to the toe area). The diagram is a simple line drawing of a foot shape with dashed lines indicating internal structure or stitching.




100

Morphology of Landslide

- 1. Main Scarp:** It is generally a steep surface on undisturbed ground around. The continuation of scarp face under the disturbed materials is called surface rupture.
- 2. Minor Scarp:** It is also a steep surface on disturbed material produced by differential movements within the sliding mass.
- 3. Crown:** The highest point seen on main scarp is called crown
- 4. Head:** It is the upper portion of slide material which is in contact with main scarp
- 5. Top:** The highest point of contact of the slide material with main scarp is called

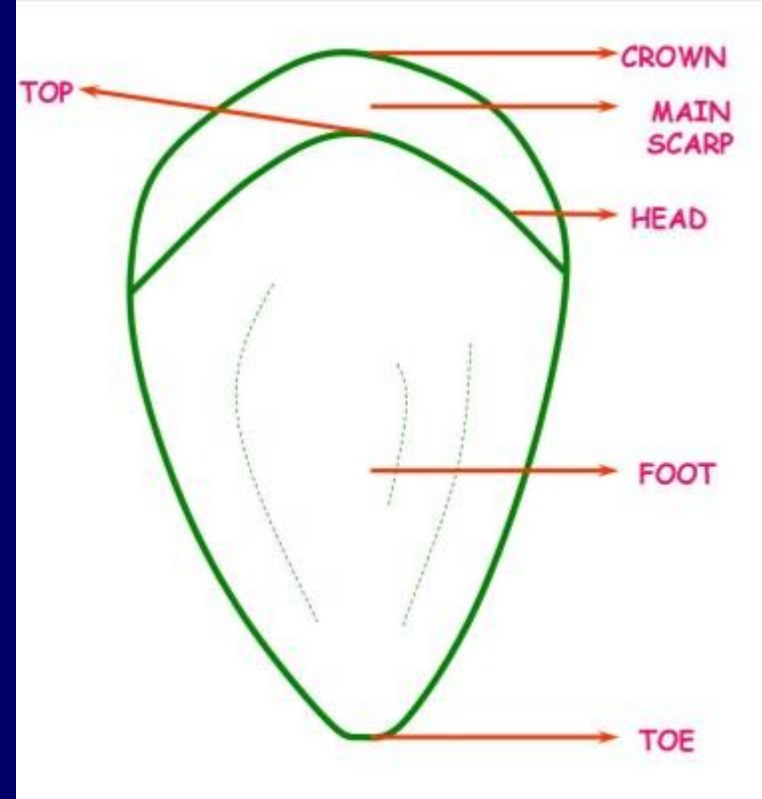


Block diagram of idealized composite earth slide - earthflow

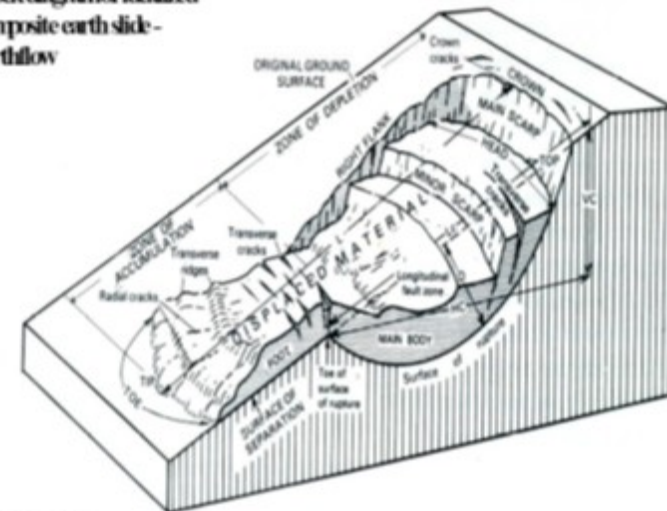


From Varnes, 1978.

Morphology of Landslide

6. **Toe:** It is the line of intersection between the lowest part of surface of rupture and original surface
7. **Foot:** The portion of landslide that has moved beyond toe and lies over the original ground surface
8. **Tip:** The lowest point on the foot of landslide
9. **Flanks:** The sides of a landslide are called flanks. The left and right sides of landslides are termed as left and right flanks respectively

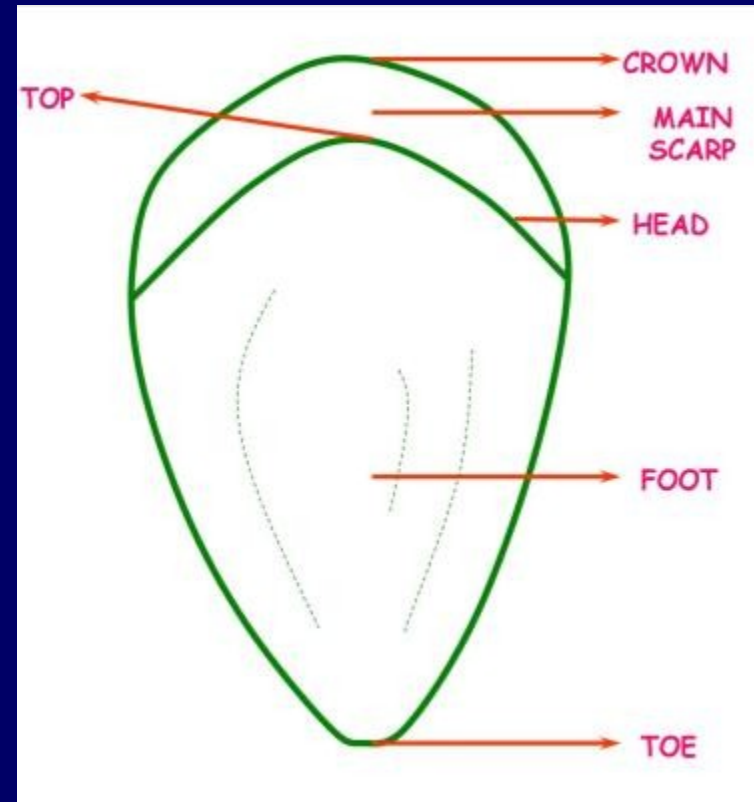

Cracks and Fissure

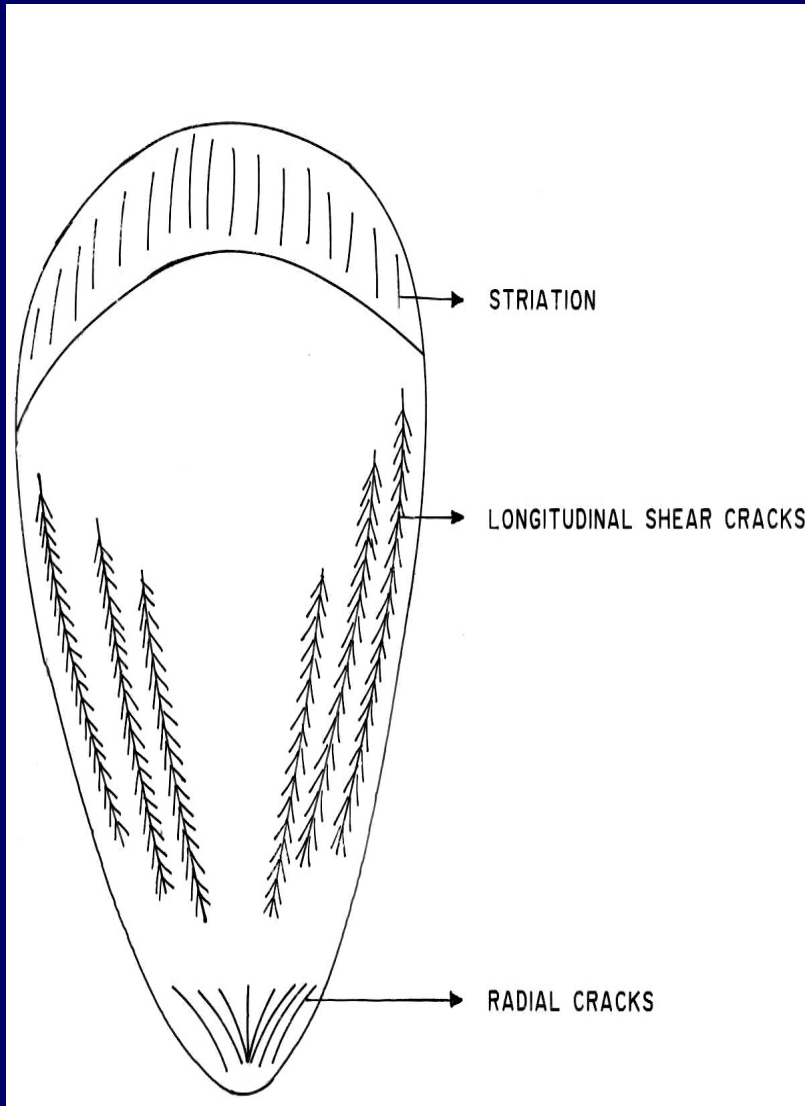

Over the ruptured surface:

- striations in the direction of movement


Flank area:

- Longitudinal shear cracks develop with minor lateral ridges squeezed out

Toe:

- Occasionally display radial cracks in relation to its arcuate outline

CRACKS AND FISSURES:

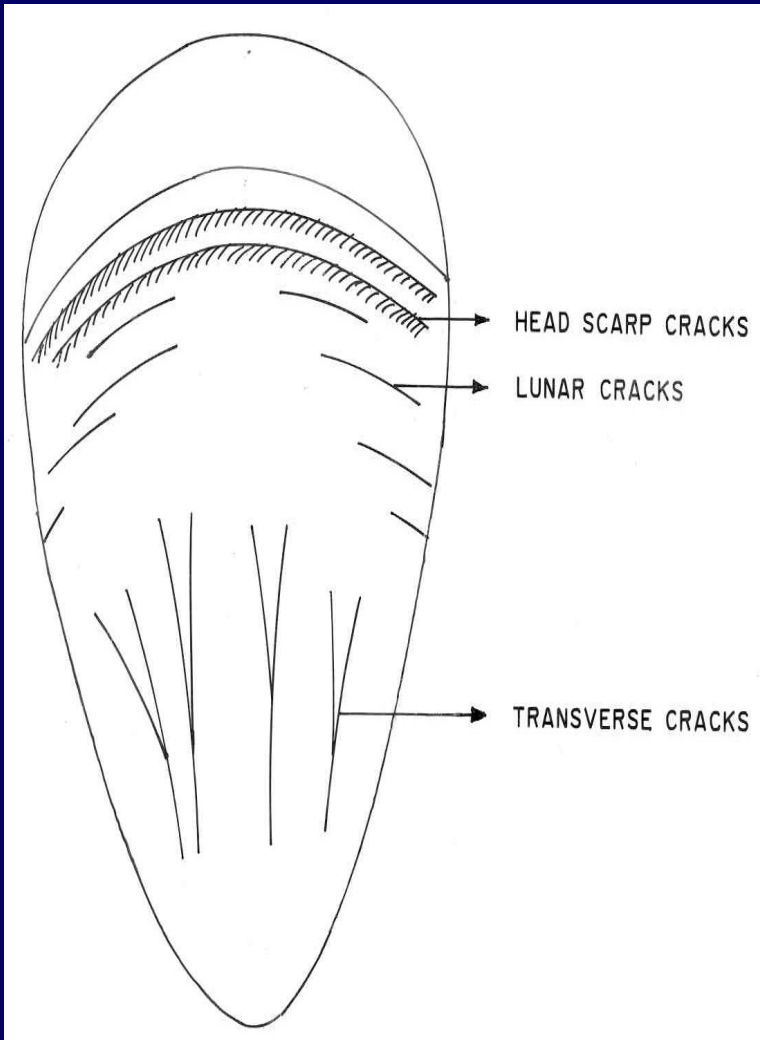

➤ Near the Head scarp area:

- Curvilinear ruptured surface with slips

➤ Over the root area: (Lunar Cracks)

- Perpend. to the direction of movements
- enechelon downward from root area indicate the lateral extent of landslide
- Appear before actual landslide

➤ Over the displaced material:

- Set of transverse cracks
- Opened up in the upper part
- Closed / deformed in the lower part

CLASSIFICATION OF LANDSLIDES

- ❖ The landslide classification are great difficulties
- ❖ Because landslides are characterised by different causes, movements and morphology, and involving genetically different material.
- ❖ For this reason, landslide classifications are based on different discriminating factors, sometimes very subjective.

Different criteria are used for classifying landslides such as

-  **Type of movement**
-  **Type of materials involved**
-  **Size of materials**
-  **Rate of movement**
-  **Water content**
-  **Texture of the material**
-  **Relation of moving material to the solid surface.**

However, the most commonly used classification is the one proposed by Varnes (1978).

This classification had been adopted by the landslide committee, Highway Research Board, Washington, USA.

This classification is based on two important parameters namely the type of movement and the type of material involved.

TYPES OF LADSLIDES (Modified after Varnes 1978)

Type of movement			Type of material		
			Rocks	Predominantly coarse - debris	Predominantly fine - soil
Falls			Rock fall	Debris fall	Earth fall
Topples			Rock topple	Debris topple	Earth topple
Slides	Rotational		Rock slump	Debris slump	Earth slump
	Translational	Few units	Rock block slide	Debris block slide	Earth block slide
		Many units	Rock slide	Debris slide	Earth slide
Lateral spreads			Rock spread	Debris spread	Earth spread
Flows			Rock flow	Debris flow	Earth flow
			Rock avalanche	Debris avalanche	
			Deep creep	Soil creep	
Complex and compound			Combination in time and/or space of two or more principal types of movement		

Fall

Description: "A fall starts with the detachment of soil or rock from a steep slope along a surface on which little or no shear displacement takes place. The material then descends mainly through the air by falling, bouncing, or rolling" (Varnes, 1996). It may be rock fall, debris fall, soil fall, earth fall or boulder fall, depending upon the type of slope material involved

Secondary falls: "Secondary falls involves rock bodies already physically detached from cliff and merely lodged upon it" (Hutchinson, 1988)

Speed: *from very to extremely rapid*

Type of slope: *slope angle 45-90 degrees*

Causes: *Vibration, undercutting, differential weathering, excavation, or stream erosion*

Rock falls occur when a piece of rock on a steep slope becomes dislodged and falls down the slope.


A rock fall may be a single rock or a mass of rocks, and the falling rocks can dislodge other rocks as they collide with the cliff.

Debris falls are similar, except they involve a mixture of soil, regolith, vegetation, and rocks.



Because this process involves the free fall of material, falls commonly occur where there are steep cliffs.

At the base of most cliffs is an accumulation of fallen material termed **talus**.

Falls

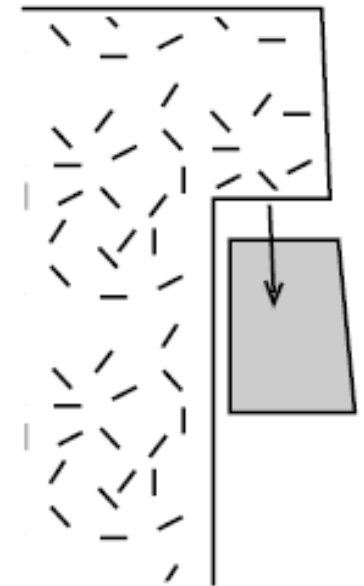

Rock and Debris Falls

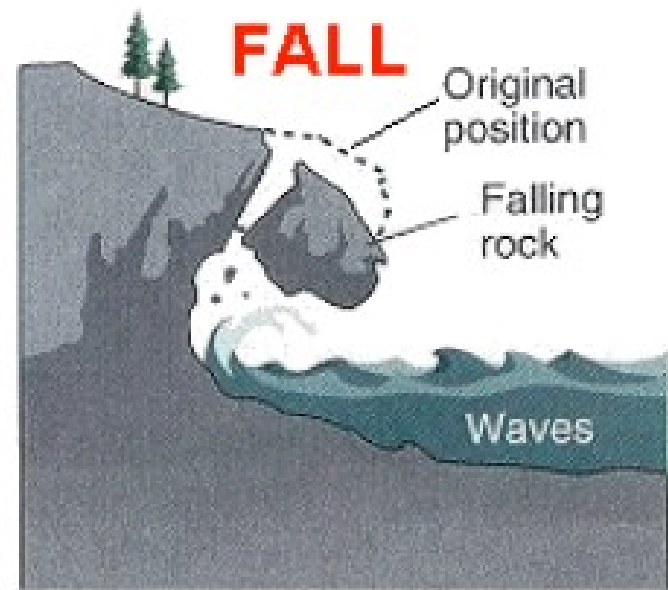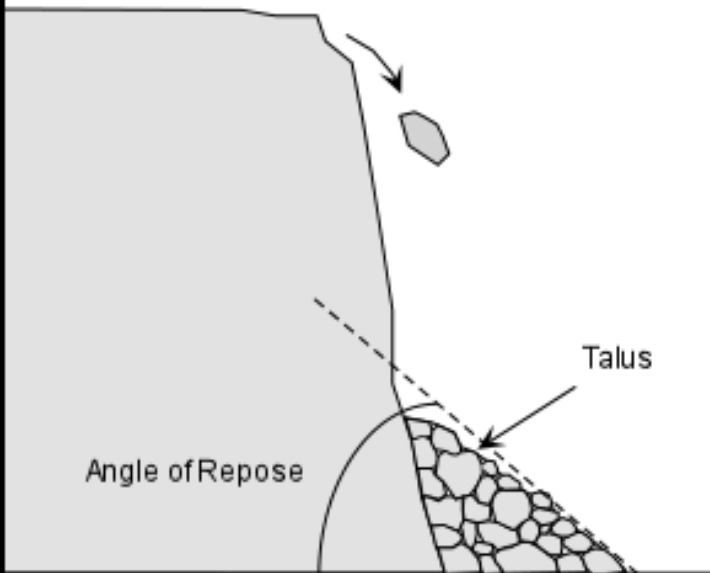

Castelmezzano - Italy. Landslide type: Rock fall

ROCKFALL




Topples


Topples refer to the type of movement, where blocks of rock tilt or rotate forward on a pivot or hinge and then separate from main mass by falling on the slope and subsequently bouncing and rolling down the slope

Speed: extremely slow to extremely rapid

Type of slope: slope angle 45-90 degrees

Causes: Vibration, undercutting, differential weathering, excavation, or stream erosion

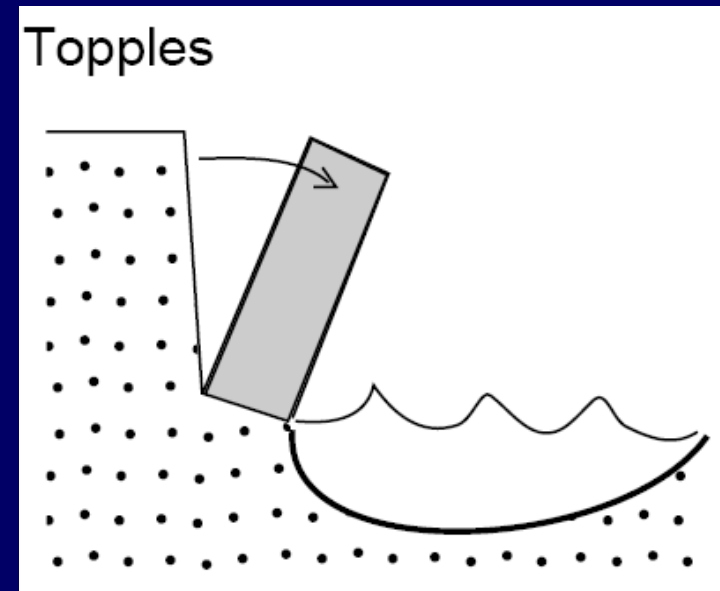

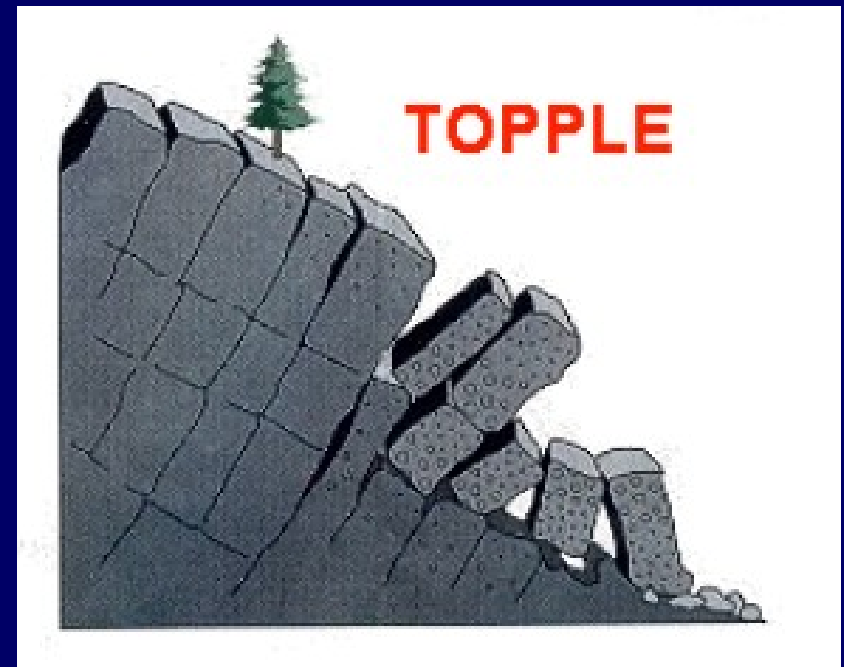

Jasper National Park- Canada Landslide type: Topple


Slides

Rock slides and debris slides result when rocks or debris slide down a pre-existing surface, such as a bedding plane, foliation surface, or joint surface

"A slide is a downslope movement of soil or rock mass occurring dominantly on the surface of rupture or on relatively thin zones of intense shear strain." (Varnes, 1996)

These slides can be classified in to two types

1. Rotational slide
2. Translational slides

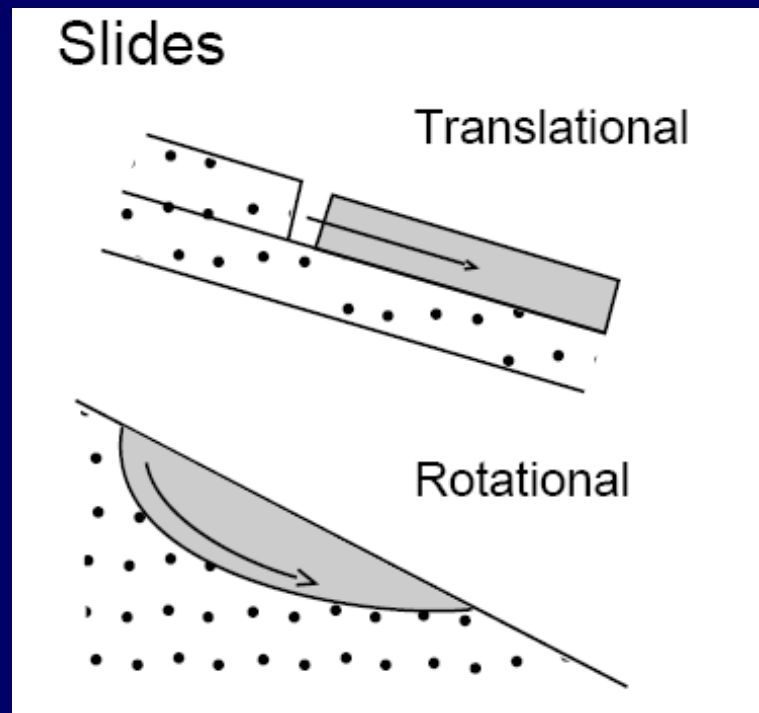

Rotational slides


Rotational slides are those in which the surface of rupture is curved and concave upwards. They occur slopes comprised of nearly homogeneous soil and debris

Description: "Rotational slides move along a surface of rupture that is curved and concave" (Varnes, 1996)

Speed: extremely slow to extremely rapid

Type of slope: slope angle 45-90 degrees

Causes: Vibration, undercutting, differential weathering, excavation, or stream erosion

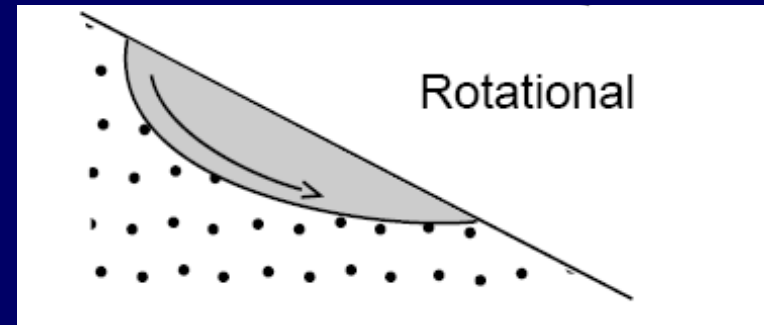


Translational slide

Translational slides are mass movements which include plane and wedge failures. The plane failure refers to a failure which is more or less planar in nature. The movement is controlled by surfaces of weakness such as bedding planes, joints, faults, shear zones and foliations.

Wedge failure is a failure where the movement basically controlled by two intersecting planes.

Block slide is also a type of translational failure where several plane or wedge blocks of rock may move down as a single unit.

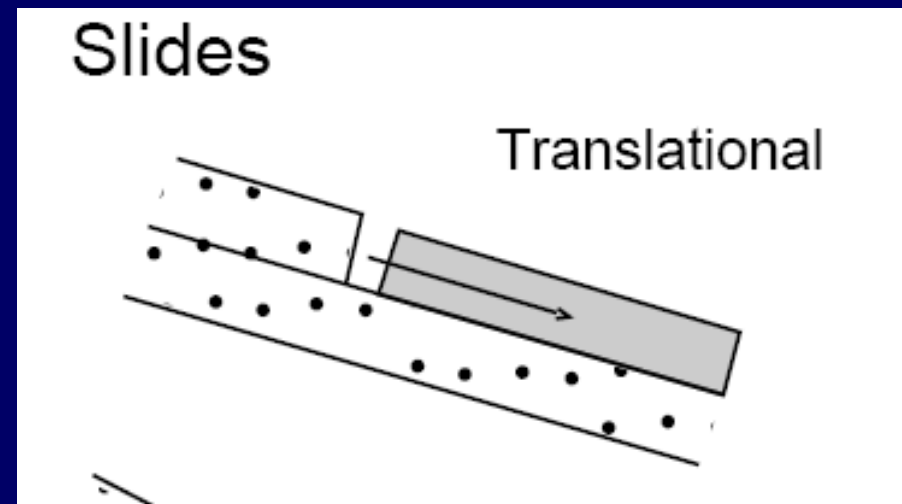

Description: "In translational slides the mass displaces along a planar or undulating surface of rupture, sliding out over the original ground surface."
(Varnes, 1996)

Speed: extremely slow to extremely rapid (>5 m/s)

Type of slope: slope angle 45-90 degrees

Causes: Vibration, undercutting, differential weathering, excavation, or stream erosion



Canada Landslide type: Rock Slide




Lauria- Italy Landslide type: Wedge failure



Lauria - Italy Landslide type: Slide

Slump is the slow to moderate movement of materials on a slope. In most cases the materials are unconsolidated or poorly consolidated. The motion is rotational and the plan of movement is curved

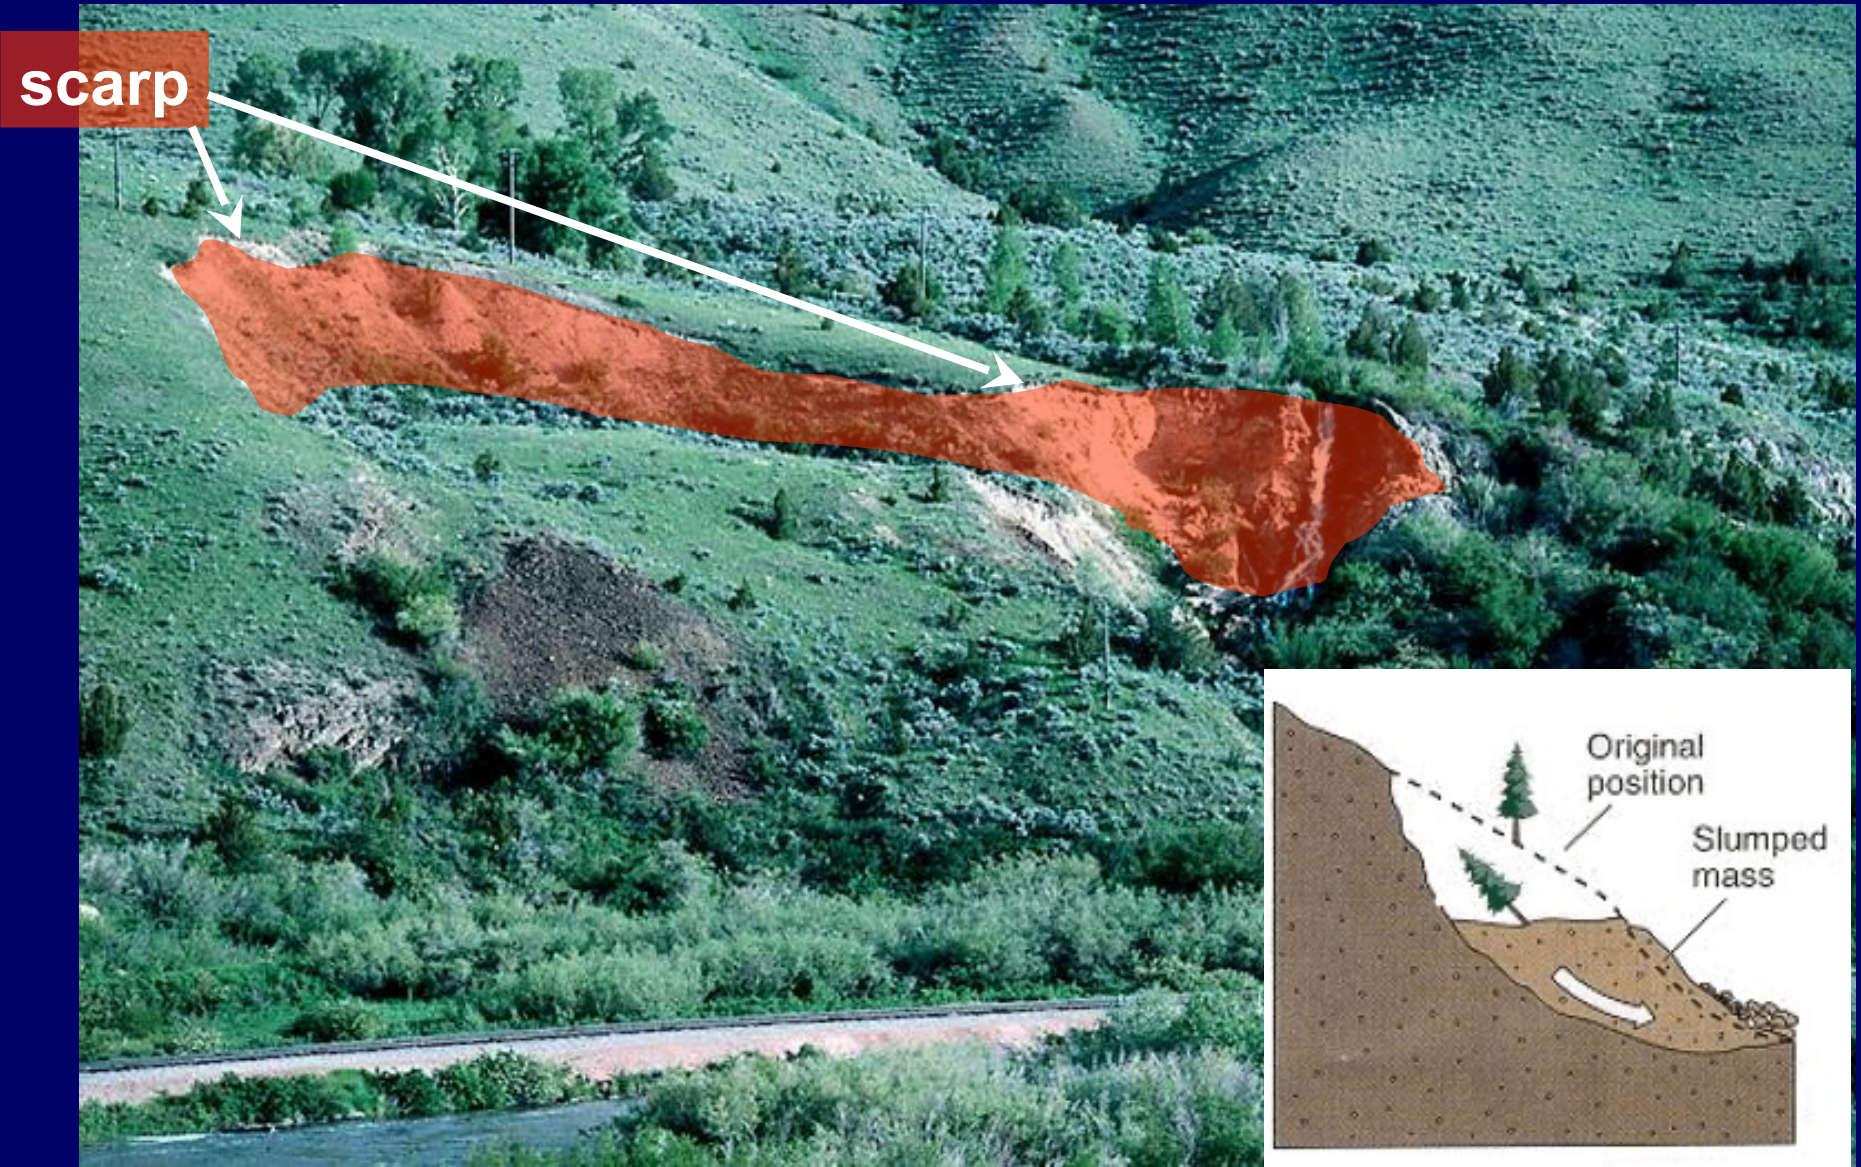




Slump in McClure Pass, CO.


Rockslide

- Rock moves because there's nothing holding it back!
- Generally requires a pre-existing low-friction surface...

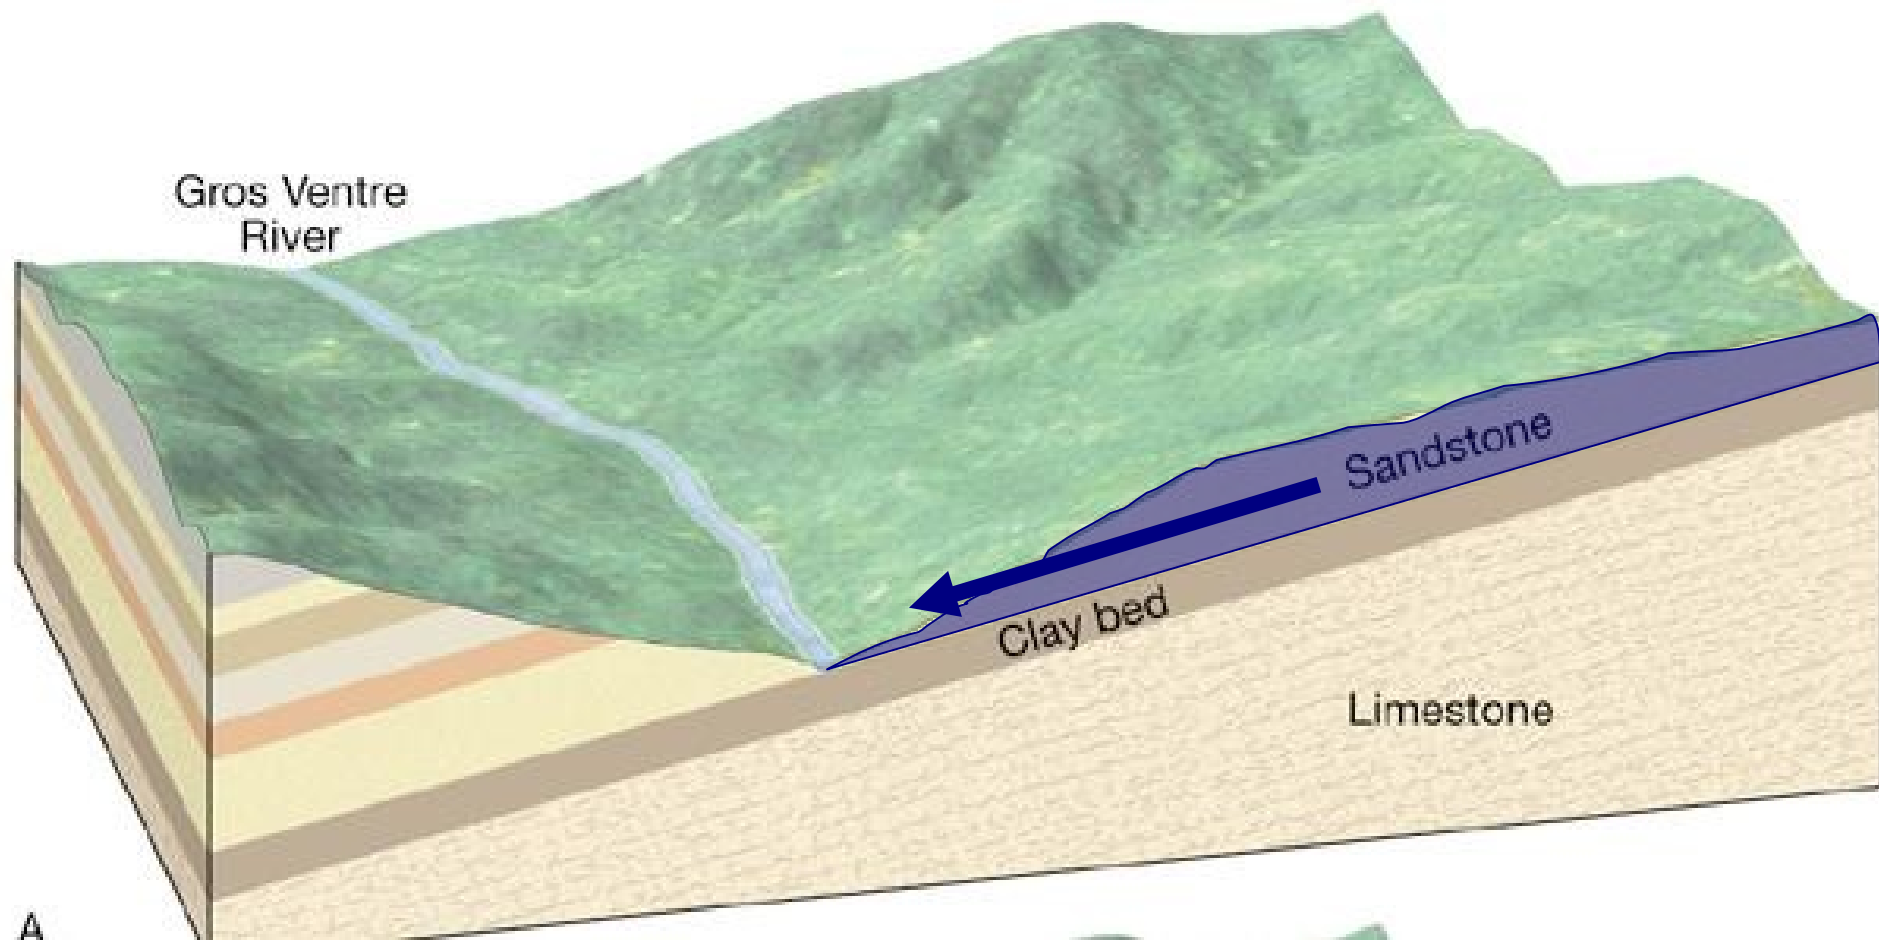

Rockslide

- like a **clay** layer, once it's wet...

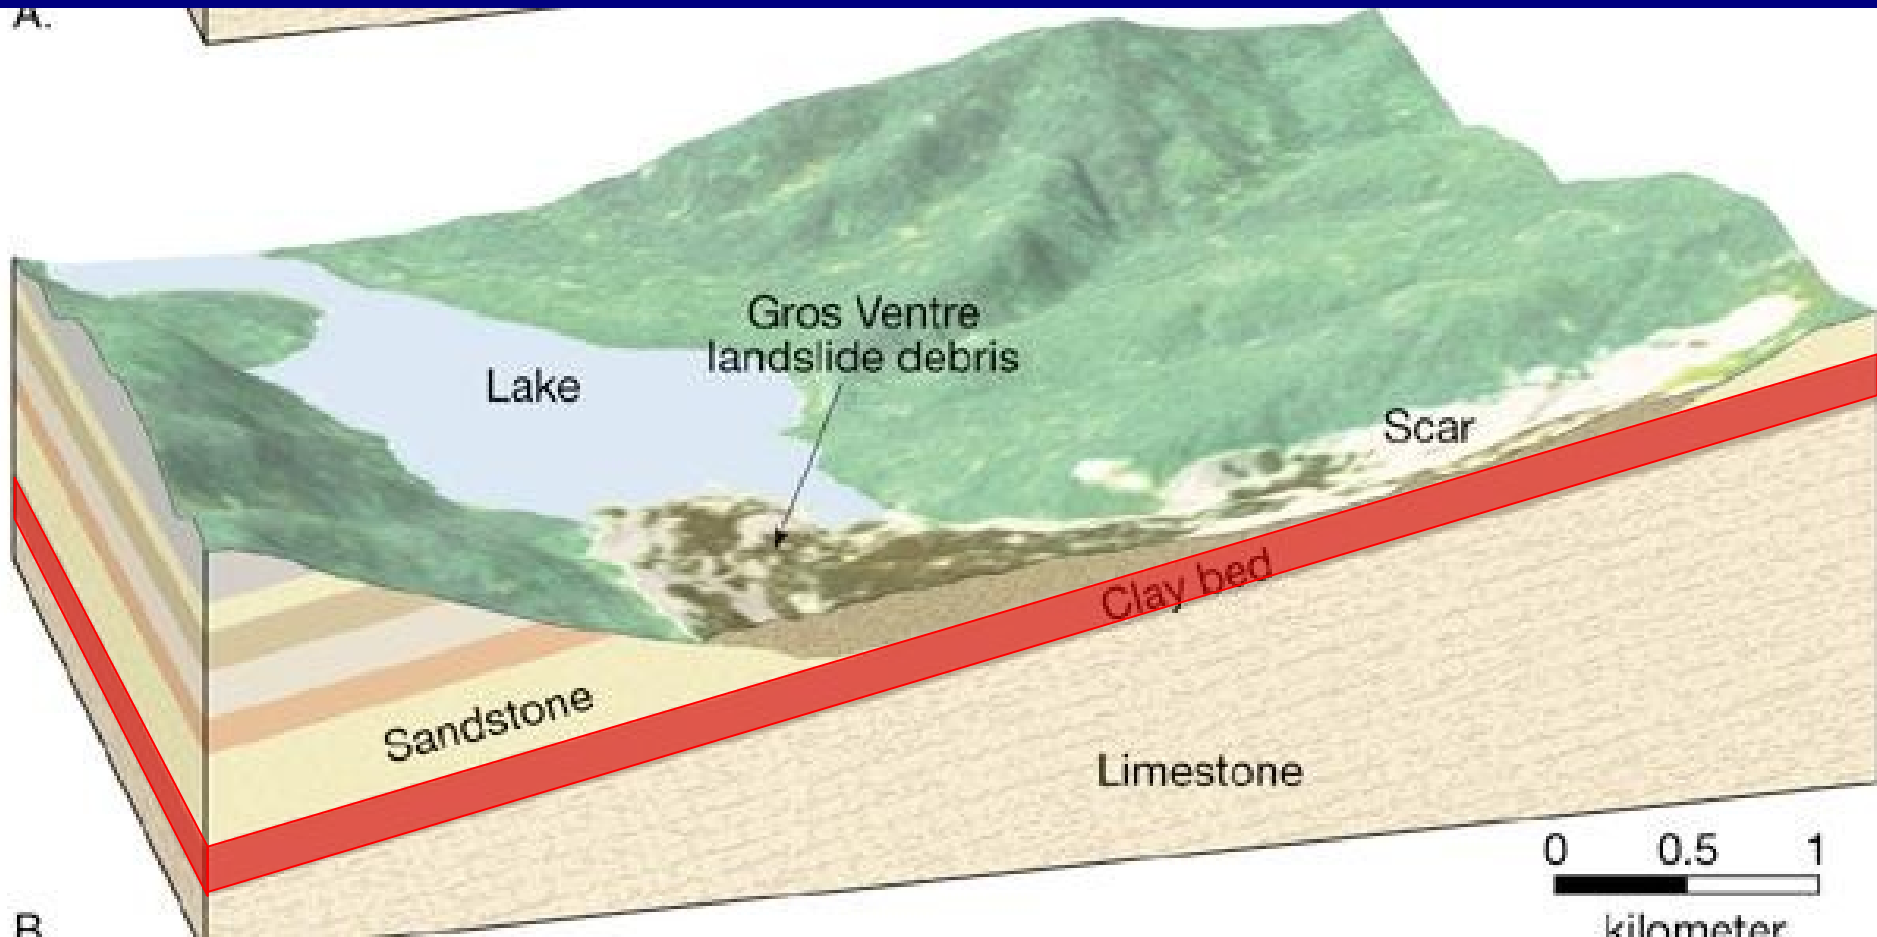

Spreads

Description: These failures are caused by over saturation of loose, cohesionless soil or debris, which may be resulted by the processes of liquefaction. Rapid ground motions such as earthquakes may be responsible for these phenomena.

Speed: extremely slow to extremely rapid (>5 m/s)

Type of slope: angle 45-90 degrees

Causes: Vibration, undercutting, differential weathering, excavation, or stream erosion

Flows

Flows represent a rapid movement on a steep to fairly steep slopes, containing high proportion of water mixed with earth materials and air. Here the movement resembles that of a viscous fluid on steep slopes.

Flows in rock

Rock Flow

Description: "Flow movements in bedrock include deformations that are distributed among many large or small fractures, or even microfracture, without concentration of displacement along a fracture" (Varnes, 1978)

Speed: extremely slow

Type of slope: angle 45-90 degrees

Causes: Vibration, undercutting, differential weathering, excavation, or stream erosion

Rock avalanche

Description: "Extremely rapid, massive, flow-like motion of fragmented rock from a large rock slide or rock fall" (Hungry, 2001)

Speed: extremely rapid

Type of slope: angle 45-90 degrees

Causes: Vibration, undercutting, differential weathering, excavation or stream erosion

Flows in soil

Debris flow: It is a form of rapid movement involving loose soil, rocks and organic materials along with entrained air and water to form slurry which flows down the slopes. It is an important form of movement in the Himalaya because it is often found to be associated with cloudburst phenomenon.

Speed: very rapid to extremely rapid (>5 m/s)

Type of slope: angle 20-45 degrees

Control factor: torrent sediments, water flows, loose rock and soil materials

Causes: High intensity rainfall

Debris avalanche: "Debris avalanche is a very rapid to extremely rapid shallow flow of partially or fully saturated debris on a steep slope, without confinement in an established channel." (Hungr et al., 2001)

Speed: very rapid to extremely rapid (>5 m/s)

Type of slope: angle 20-45 degrees

Control factor: morphology, regolith

Causes: High intensity rainfalls



Pozzano (Castellammare di Stabia) – Italy. Landslide type: Debris flow



**Location: Quindici - Italy.
Debris flow deposits**



Location: Quindici - Italy.
Debris flow deposits



Location: Positano, Sorrentine Peninsula -
Italy Landslide type: Rock avalanche




Location: Sarno - Italy.
Landslide type: Debris flow



Debris flow



Debris flow

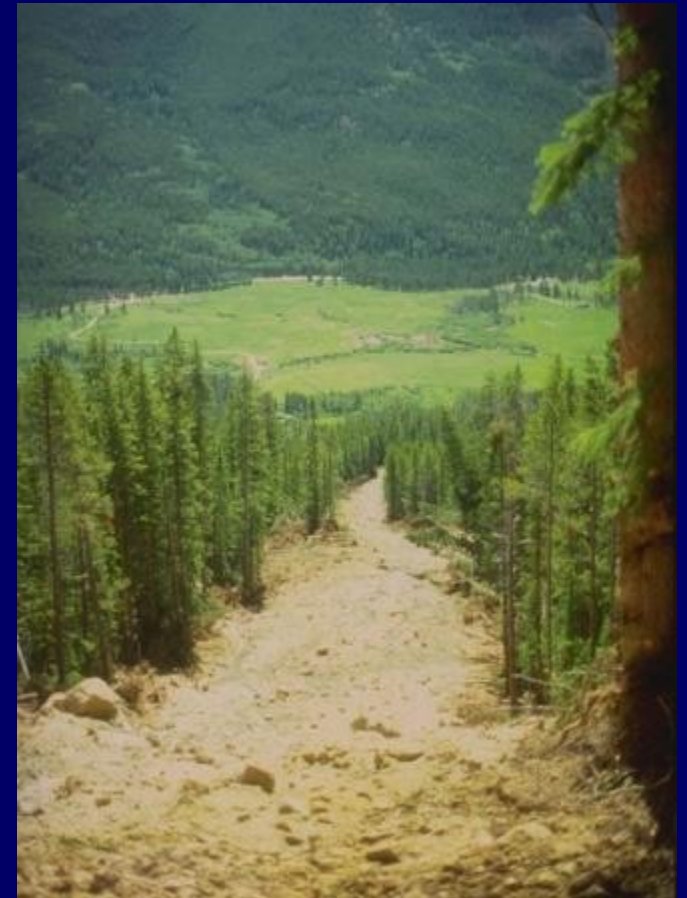

Earth flow: Earth flows have a characteristic bowl like depression at the head where slope forming materials become liquefied and flow out. The flow is generally channelised on the slopes and spreads out at toe. Usually the flow occurs in fine grained materials like clayey soils under saturated conditions

"Earth flow is a rapid or slower , intermittent flow-like movement of plastic, clayey earth." (Hungr et al.,2001)

Speed: *slow to rapid (>1,8 m/h)*

Type of slope: *slope angle 5-25 degrees*

Control factor: *lithology*

Mudflow : "Mudflow is a type of earth flow consisting of fine materials containing about half of silt and clay sized particles which are well saturated and flow rapidly

Speed: very rapid to extremely rapid (>5 m/s)

Type of slope: angle 20-45 degrees

Control factor: torrent sediments, water flows

Causes: High intensity rainfall




Location: Castelfranci - Italy
Landslide type: Earth flow

Earth flow




A Creep may be defined as an imperceptibly slow, steady, downward movement of slope forming materials. In case of creep, the movement essentially starts with permanent minor deformation but too small to cause a landslide

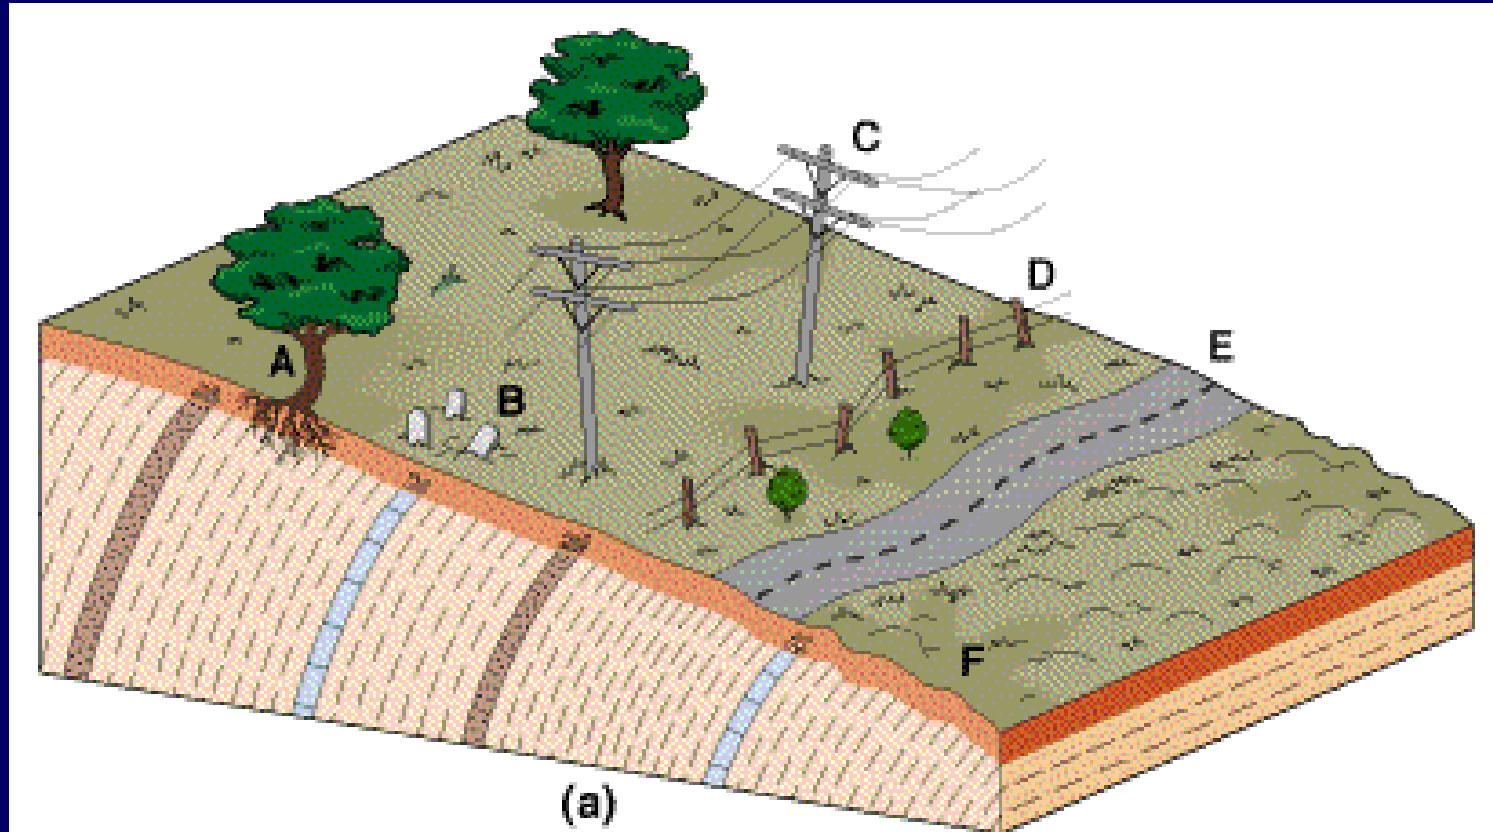

Some evidence of creep: (A) curved tree trunks; (B) displaced monuments; (C) power poles tilted downhill; (D) displaced and tilted fence; (E) roadway moved out of alignment; and (F) hummocky surface.

Creep

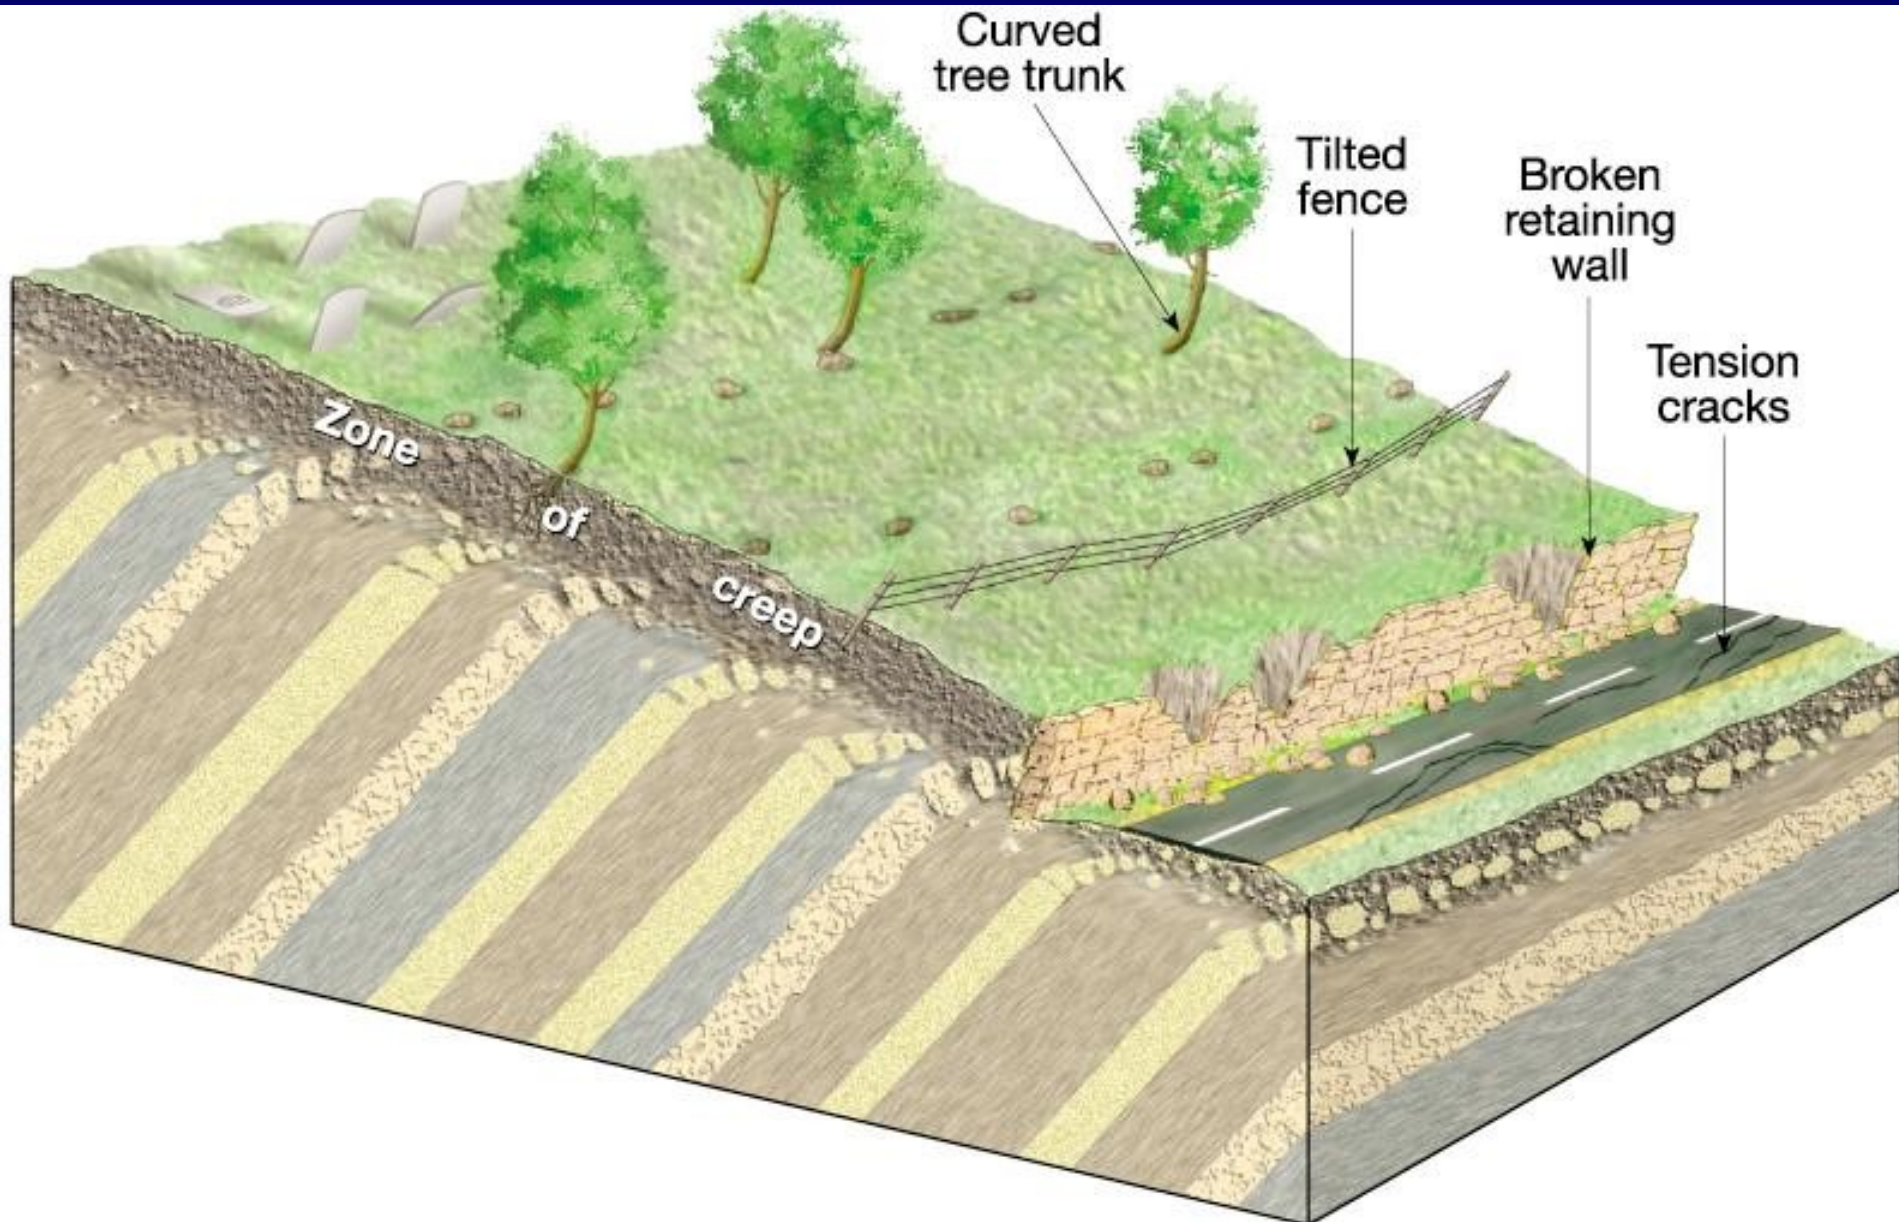

Creep



from D. Schwert, NDSU

Complex movement: Complex movement is a combination of falls, topples, slides, spreads and flows

Causes of landslides

- The causes of landslides are usually related to instabilities in slopes.
- It is usually possible to identify one or more landslide causes and one landslide trigger.
- The difference between these two concepts is subtle but important.
- The landslide causes are the reasons that a landslide occurred in that location and at that time.
- Landslide causes include geological factors, morphological factors, physical factors and factors associated with human activity.

Causes of landslides.....

- Causes may be considered to be factors that made the slope vulnerable to failure, that predispose the slope to becoming unstable.
- The trigger is the single event that finally initiated the landslide.
- Thus, causes combine to make a slope vulnerable to failure, and the trigger finally initiates the movement.
- Landslides can have many causes but can only have one trigger

Causes of landslides.....

In general, the factors causing the landslides are categorized into

- 1. Natural factors**
- 2. Anthropogenic factors**

Natural factors are further subdivided into following categories

- 1. Inherent factors**
- 2. External factors**

Causes of landslides....

- 1. Inherent factors:** These factors represent the inherent characteristics of hill slope and they can be studied and evaluated on the slope itself. These factors include geology, slope gradients, local relief, hydrological conditions, land use and land cover
- 2. External factors:** As the name indicates, these are the outside factors, which can not be studied on a hill slope. They usually affect a larger area and hence called regional factors.

These factors include concentrated rain fall and earthquakes. Since many a time these factors are responsible for initiation of landslide, they are also known as triggering factors

Causes of landslides....

Some of the inherent factors are discussed below

Change in slope gradient: This may be caused by natural or artificial interference in the processes of erosion.

The undercutting of banks by deeply incised rivers and streams causing steep bank slopes.

Some time the slope angle is steepened as a result of tectonic processes also such as subsidence or upliftment.

High relief along with increase in slope gradient is generally produced on hard rock slopes causing highly unstable conditions of slope stability. These slopes are highly potential slopes for rock falls

Causes of landslides....

Steep slope embankments of fills and soil heaps:

Depending upon the type of soil and its inherent strength characteristics, the soil may be stable over a range of slope conditions. If the slope of embankment exceeds this limit, the soil may undergo slip circle failure, particularly when the saturation by water appreciably decreases the shear strength of this materials

Geology: Loose unconsolidated materials, highly fractured and sheared rocks (because of intense folding and faulting, which is common in the Himalayan terrain). Jointed rocks, Rocks having two or more set of joints may undergo plane or wedge failure. Moreover, extensive occurrence of weak rocks like slates and phyllites along with calcareous interlayers in these rocks may lead to high porosity and void formation due to leaching and dissolution of rock mass

Causes of landslides....

Changes in water content: Rain and snow melt water penetrates into joints and fractures of rocks, thus increasing the pore water pressure within rocks.

This in turn may also decrease shear resistance of rocks causing instability.

Clayey soils, when dry up get desiccated and shrunken which result in cracking of surface.

The surface readily percolates through these fractures. The increased subsurface water content may lead to plastic deformation.

Causes of landslides....

Frost effects: Water trapped in rock fissures and joints freezes causing increase in volume. This imparts a tremendous amount of pressure on the rock walls, leading to widening of joints and fractures. Freezing of water on the surface impedes drainage of slope and thus increasing pore water pressure

Weathering: Mechanical and Chemical weathering affects the strength of rock mass, which is also one of the contributory factors of landslide.

Causes of landslides....

Effects of Vegetation: The deforestation of slopes particularly soil slopes is one of the well known factors in inducing landslides. It exposes barren soil to erosion and destabilization.

On the contrary, Sometimes the growth of plants and other vegetation in the pre-existing plane of landslides or joints of the rocks may also cause excess stress on joint walls due to increase in size of roots. This phenomenon may push the slope materials out and cause landslides.

Anthropogenic factors

Among the anthropogenic factors, following are important ones

Deforestation: Plant roots have the tendency to bind soil and thus they are helpful to retard slope stability unless the failure plane is very deep i.e. beyond the root zone. This factor contributes for many Himalayan landslides as intensive deforestation is reported in many parts of the Himalaya.

Improper land use:

- Agricultural practices on steep slopes
- Irrigation on steep and vulnerable slopes
- Overgrazing
- Quarrying for construction materials without considering condition of the terrain

Construction Activities: Improper selection of site or lack of terrain capability evaluation before placement of infrastructures such as hill roads and canals

Triggers of landslides

Rain Fall

In the majority of cases the main trigger of landslides is heavy or prolonged rainfall.

Because the rainfall drives an increase in pore water pressures within the soil.

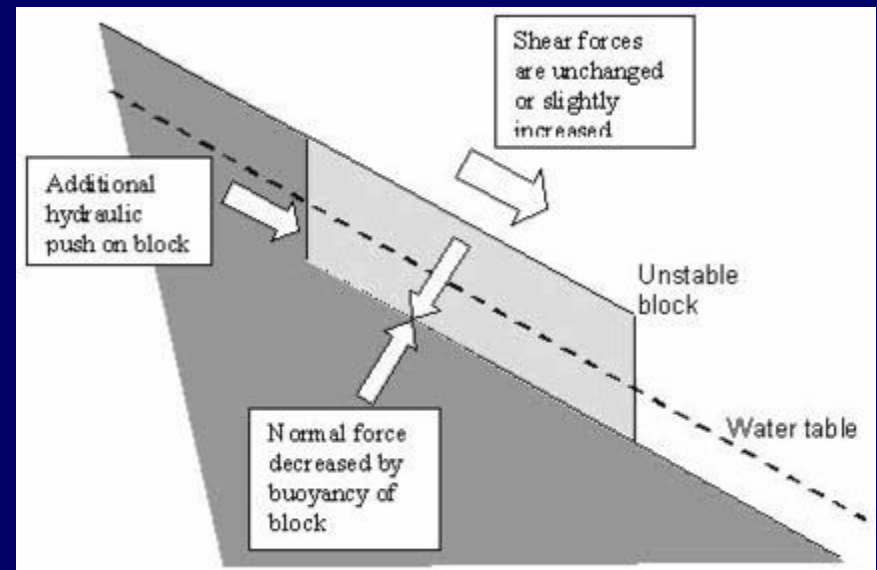
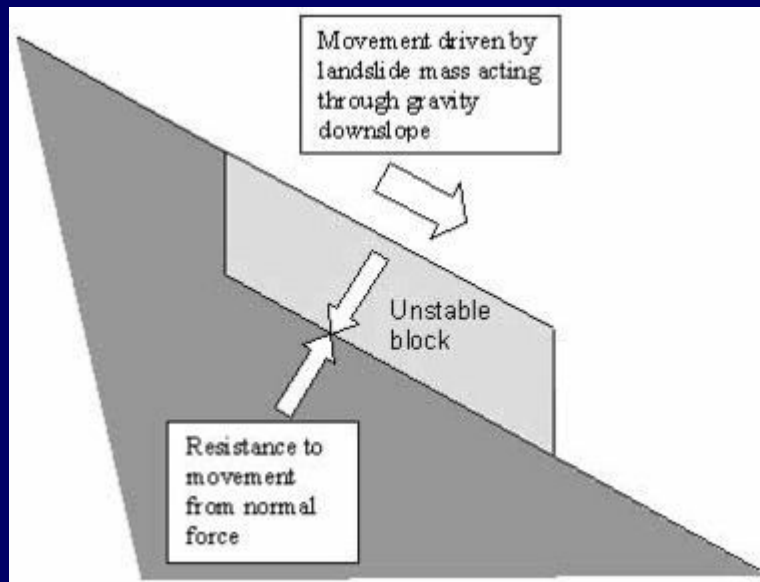


Diagram illustrating the resistance to, and causes of, movement in a slope system consisting of an unstable block

Snowmelt

In many cold mountain areas, snowmelt can be a key mechanism by which landslide initiation can occur.

This can be especially significant when sudden increases in temperature lead to rapid melting of the snow pack.

This water can then infiltrate into the ground, which may have impermeable layers below the surface due to still-frozen soil or rock, leading to rapid increases in pore water pressure, and resultant landslide activity.

This effect can be especially serious when the warmer weather is accompanied by precipitation, which both adds to the groundwater and accelerates the rate of thawing.



Water-level change

Rapid changes in the groundwater level along a slope can also trigger landslides.

This is often the case where a slope is adjacent to a water body or a river. When the water level adjacent to the slope falls rapidly the groundwater level frequently cannot dissipate quickly enough, leaving an artificially high water table.

This subjects the slope to higher than normal shear stresses, leading to potential instability.

This is probably the most important mechanism by which river bank materials fail, being significant after a flood as the river level is declining (i.e. on the falling limb of the hydrograph) as shown in the following figures.

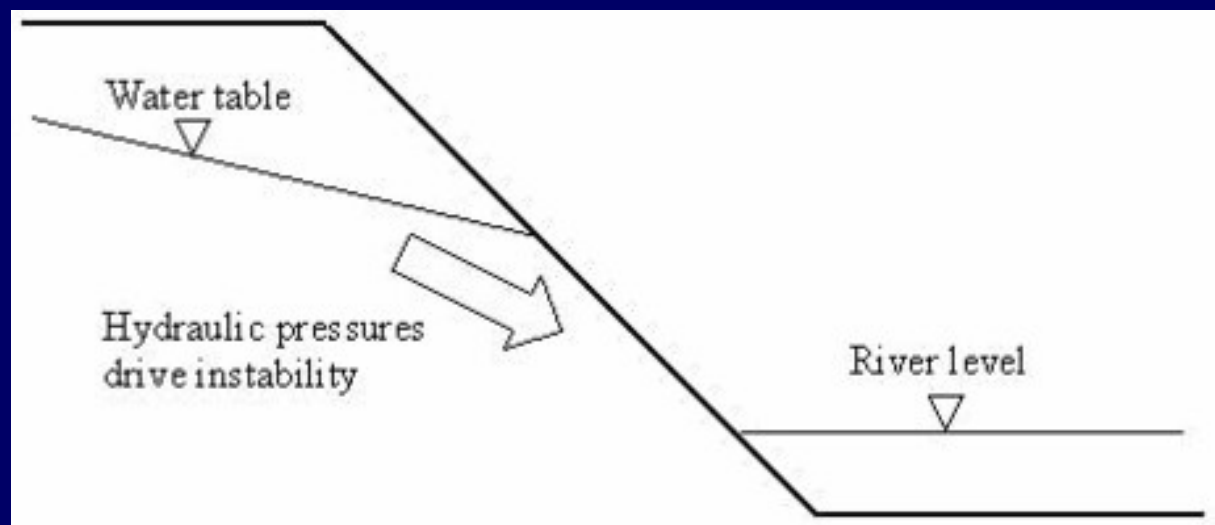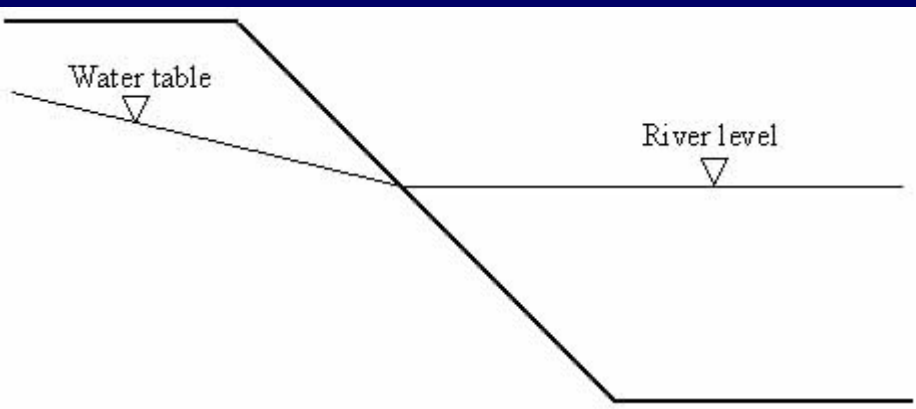

Rivers

In some cases, failures are triggered as a result of undercutting of the slope by a river, especially during a flood.

This undercutting serves both to increase the gradient of the slope, reducing stability, and to remove toe weighting, which also decreases stability.

For example, in Nepal this process is often seen after a glacial lake outburst flood, when toe erosion occurs along the channel. Immediately after the passage of flood waves extensive landsliding often occurs. This instability can continue to occur for a long time afterwards, especially during subsequent periods of heavy rain and flood events.

Seismicity

The second major factor in the triggering of landslides is seismicity. Landslides occur during earthquakes as a result of two separate but interconnected processes: seismic shaking and pore water pressure generation

The passage of the earthquake waves through the rock and soil produces a complex set of accelerations that effectively act to change the gravitational load on the slope

Liquefaction

The passage of the earthquake waves through a granular material such as a soil can induce a process termed liquefaction, in which the shaking causes a reduction in the pore space of the material.

This densification drives up the pore pressure in the material.

In some cases this can change a granular material into what is effectively a liquid, generating 'flow slides' that can be rapid and thus very damaging.

Alternatively, the increase in pore pressure can reduce the normal stress in the slope, allowing the activation of translational and rotational failures.

Volcanic activity

Some of the largest and most destructive landslides known have been associated with volcanoes.

These can occur either in association with the eruption of the volcano itself, or as a result of mobilisation of the very weak deposits that are formed as a consequence of volcanic activity. Essentially, there are two main types of volcanic landslide: lahars and debris avalanches, the largest of which are sometimes termed flank collapses.

An example of a lahar was seen at Mount St Helens during its catastrophic eruption on May 18, 1980.

Landslide Investigations and Mapping Techniques

Landslide Investigations are carried out on three different approaches namely 1. Analytical methods, Observational Methods and Empirical Methods. Depending on the importance of investigation, details used for analysis, scale, nature of output data.

Analytical Methods: Detailed Study on 1:1,000 to 1:2,000 scale. This is also called the microzonation

Require data on properties of rocks and soils and particularly on shear strength

Observational Methods: are based on monitoring of the slopes through instruments (extensometers, inclinometers, piezometers

Empirical Methods: is a rapid hazard assessment technique, in this method, experience and knowledge gained from previous landslide investigations.

This also involves identification of causative factors of landslides and their influence in inducing instabilities.

Landslide Mapping Based on Themes and Scales

In the Himalayan or Nilgiri terrain, most of the landslides take place during monsoon period along road section and cause loss of life and property

Hence it is important to study and prognosticate vulnerable locations where landslides may take place. For that purpose, landslide investigations involve topographical and geological mapping in order to carry out stability analysis.

Landslide Mapping Based on Themes

Danger: Based on existing natural landslide phenomenon. It is also called as Landslide inventory map. This is only indicate the location of landslides

Hazard: refers to the probability of occurrence of a landslide places on the basis of various terrain parameters

Risk: refers to the nature of damage likely to be caused if failure occurs

Landslide Mapping Based on Scale

Mega Regional Mapping: 1:1,00,000 to 1:2,00,000

Regional Mapping: 1:50,000 to 1: 25,000

Semi – Detailed Mapping 1:10,000 to 1: 15,000

Detailed Mapping 1:1,000 to 1: 2,000


LANDSLIDE IDENTIFICATION FEATURES:

In cross section:

- **Convex bulged shape of the toe**

On the surface:

- **Typical cracks and fissures with distinct vegetation**

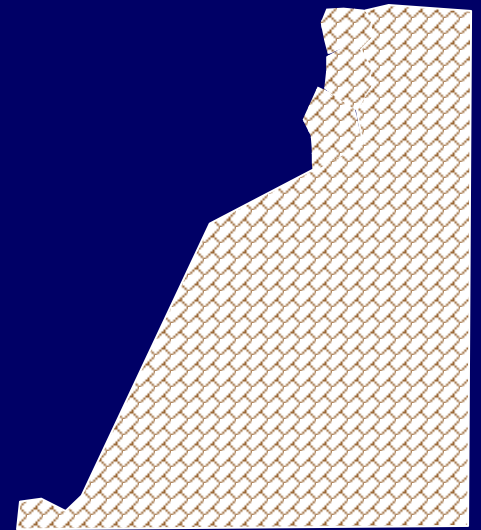

REMOTE SENSING IN LANDSLIDES

- Aerial photographs of 1:25,000 / 1:12,500 scale is good
- Panchromatic satellite data
- PAN + LISSIII merged data

to identify

- Paleoscars
- Active slopes
- Spatial distribution
- Their association with controlling parameters etc.

PHOTO CHARACTERS:

- Head scarp:** Sharp break in slope between head scarp and displaced mass
- Slide scars:** Light tone and the arcuate shape due to less vegetation
- Disturbed mass:** Lobate forms, jagged or hummocky topography, mottled tone, minor ridges parallel to contour level common
- Drainage :** Elongated, undrained depressions, haphazard pattern over the disturbed mass
- Vegetation tone :** Light tone, clumsy vegetation, oriented vegetation parallel to contour in the disturbed area.

GIS IN LANDSLIDES


- **Not a single parameter alone is responsible for landslides**
- **So it involves multi thematic layer analysis**
- **Hence Geographic Information system (GIS) for**
 - Data integration**
 - **To identify the Landslide hazard zones**
 - **To find out the causative factor**
 - **To suggest suitable measures to prevent landslide.**

IN INDIA LANDSLIDES ARE COMMON IN THREE MAJOR MOUNTAIN PROVINCES

HIMALAYAS

WESTERN
GHATS

NILGIRIS

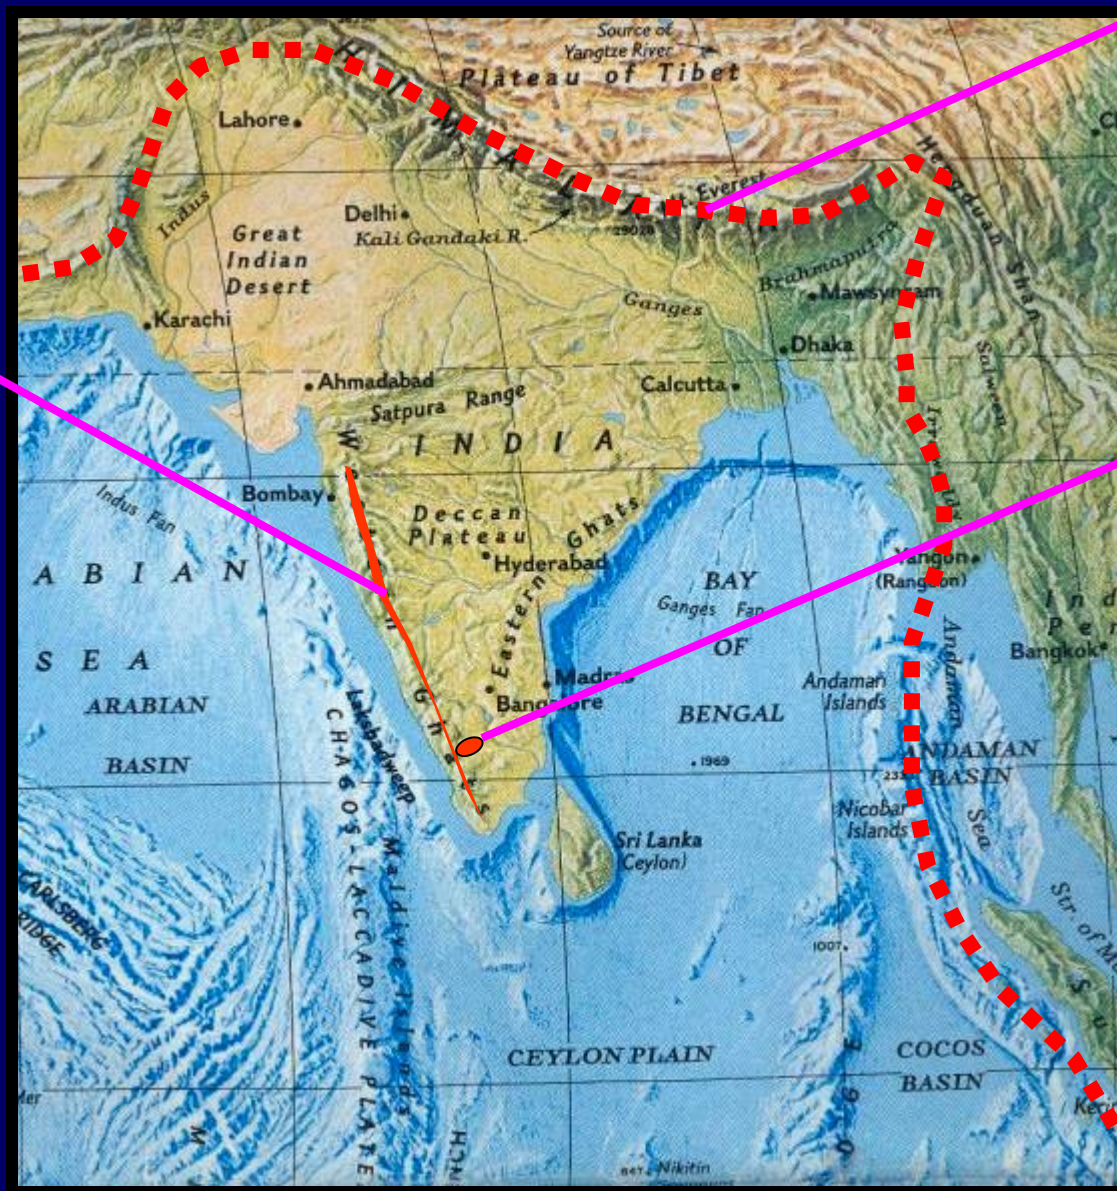

LANDSLIDES IN INDIA :

PROVINCES

TRIGGERING PHENOMENON

Himalayan

Active tectonic zones

Western Ghat

Toe erosion and related mass movement

Nilgiri Massif

Pore pressure

Hence the studies and remedial measures must be a site specific after understanding its

Actual functional parameters

Causative factors

SOME OF THE DISASTROUS LANDSLIDES IN INDIA

Date/year	Location	Damage
September 1968	Himachal Pradesh	Active Maling slide- 1km of road and a bridge washed out
July 1968	Garhwal Himalaya	Active Kaliasaur slide- continuous damage to road
December 1982	Himachal Pradesh	Near Solding nallah 3 bridges & 1.5km length of road washed away
January 1982	Nashri, Jammu & Kashmir	Active slide from 1953. Every year road and communication network is damaged.
March 1989	Himachal Pradesh	Nathpa, 500m road section is frequently damaged during successive year
October 1990	Nilgris	36 people killed and several injured. Several buildings and communication network damaged
July 1991	Assam	300 people killed, road and buildings damaged, Millions of rupees
November 1992	Nilgiris	Road network and buildings damaged, Rs.5 million damage estimate
June 1993	Aizawal	Four persons were buried
July 1993	Itanagar Arunachal Pradesh	25 people buried alive 2 km road damaged
August 1993	Kalimpong, West Bengal	40 people killed, heavy loss of property
August 1993	Kohima, Nagaland	200 houses destroyed, 500 people died, about 5km road stretch was damaged
November 1993	Nilgris	40 people killed, property worth several lakhs damaged
January 1994	Kashmir	National Highway 1A severely damaged
June 1994	Varundh ghat, Konkan Coast	20 people killed, breaching of ghat road damaged to the extent of 1km. At several places
May 1995	Aizwal Mizoram	25 people killed road severely damaged
June 1995	Malori Jammu	6 persons killed, NH 1A damaged
September 1995	Kullu, HP	22 persons killed and several injured about 1 km road destroyed
14, August 1998	Okhimath	69 people killed
18, August 1998	Malpa, Kali river	205 people killed road network to Mansarovar disrupted

LANDSLIDE HAZARD ZONATION

LANDSLIDE HAZARD ZONATION

- **Landslide**

Soil or rock materials move / slip down slope under the direct influence of gravitational forces

- **Hazard**

The probability of occurrence of a potential phenomenon within a specified period of time and within a given area

- **Zonation**


The division of land into homogeneous areas or domains and their ranking according to degrees of actual/potential hazard caused by mass movements

LANDSLIDE HAZARD ZONATION

→ Landslide hazard zonation can be done by using following methods


- 1. Integrated Land system Analysis**
- 2. GIS based Integrated Slope Method**
- 3. Information Value**
- 4. Weight of Evidence**
- 5. Index Overlay and**
- 6. BIS Methods**

Methodology for the preparation of Landslide Hazard Zonation map Integrated Land system Analysis

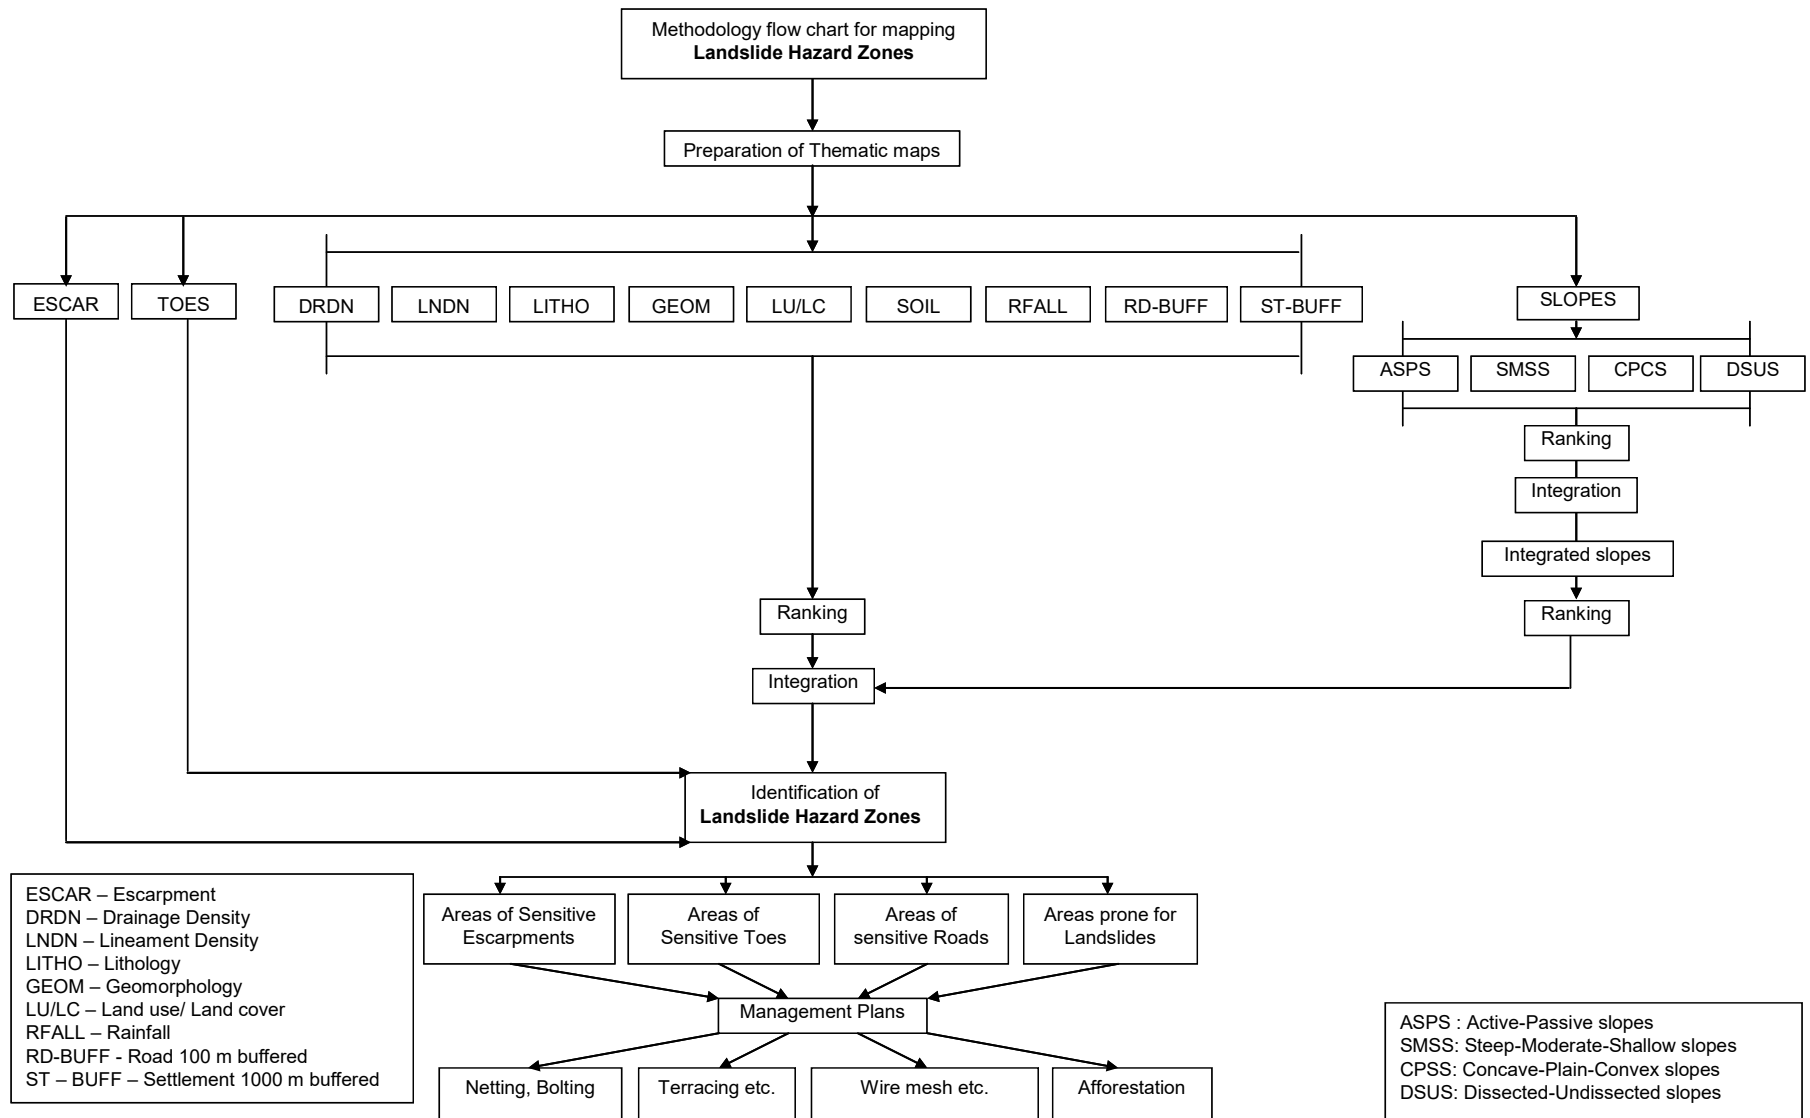



Thematic maps

1. Drainage map - Drainage Density
2. Lineament map – Lineament Density
3. Rain fall
4. Lithology
5. Soil
6. Geomorphology
7. Land use / Land cover
8. Slopes
9. Escarpments
10. Sensitive toes
11. Road network
12. Settlement

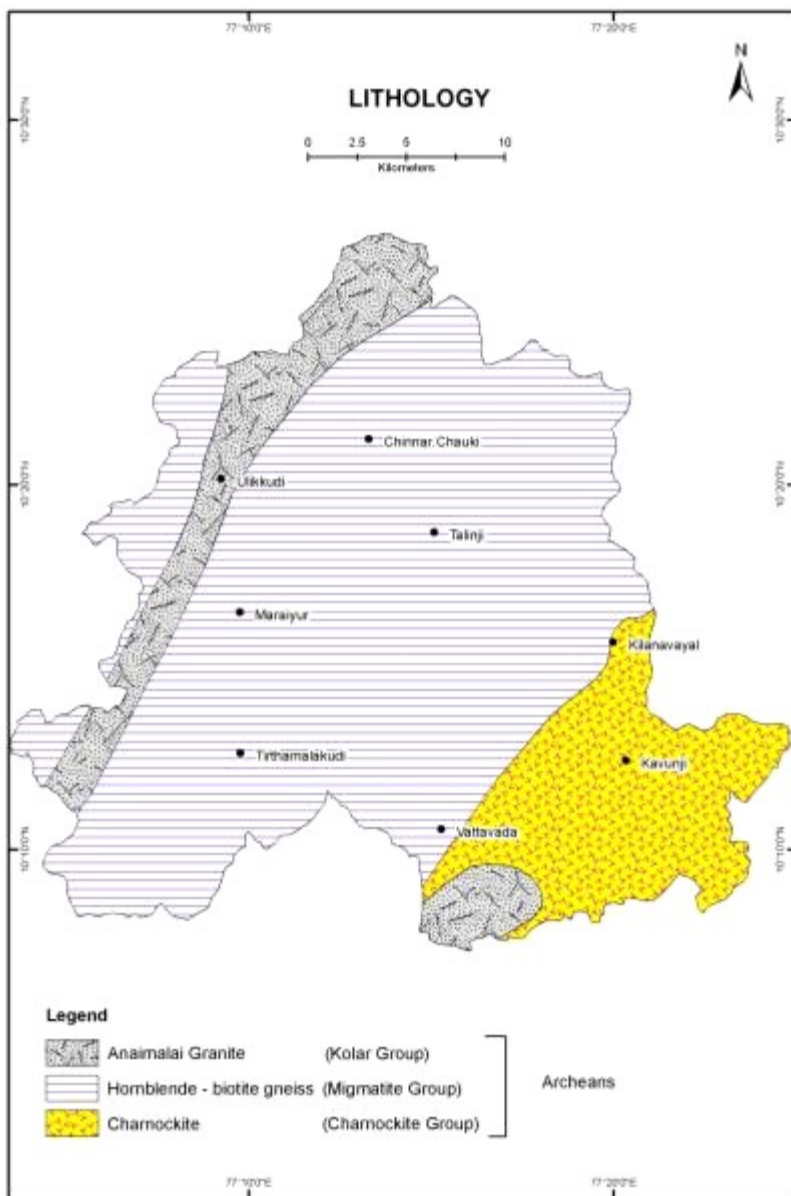

			Hornblende-biotite gneiss		
			Charnockite		

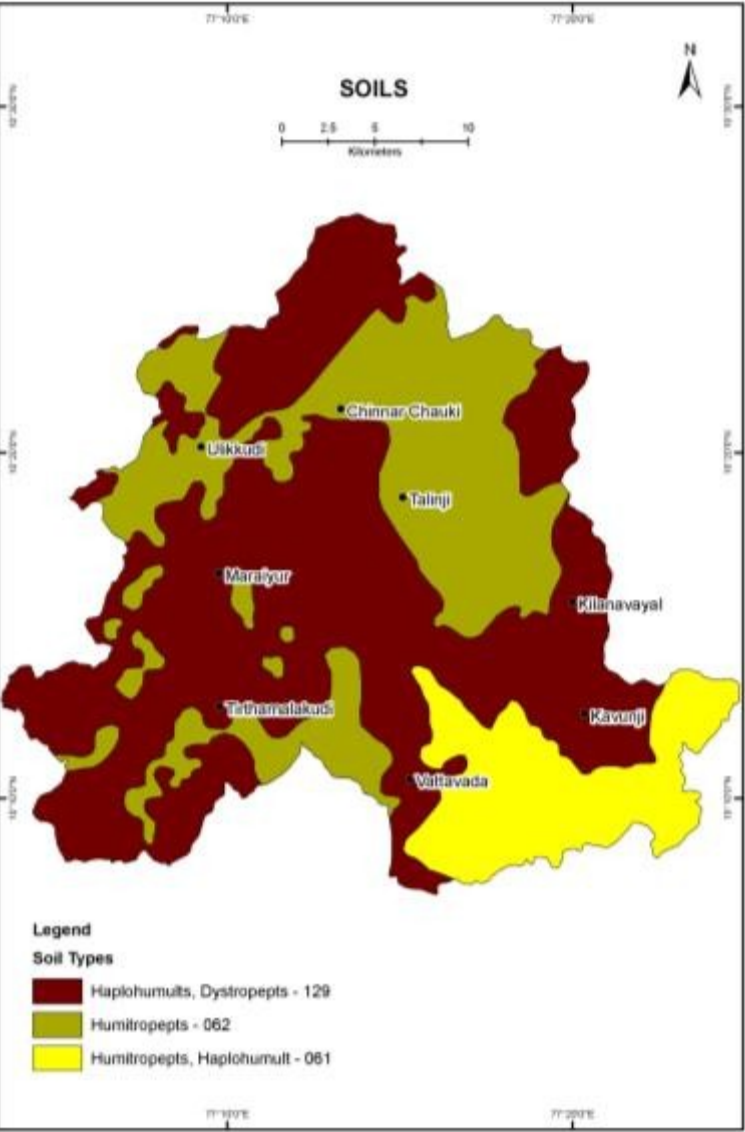

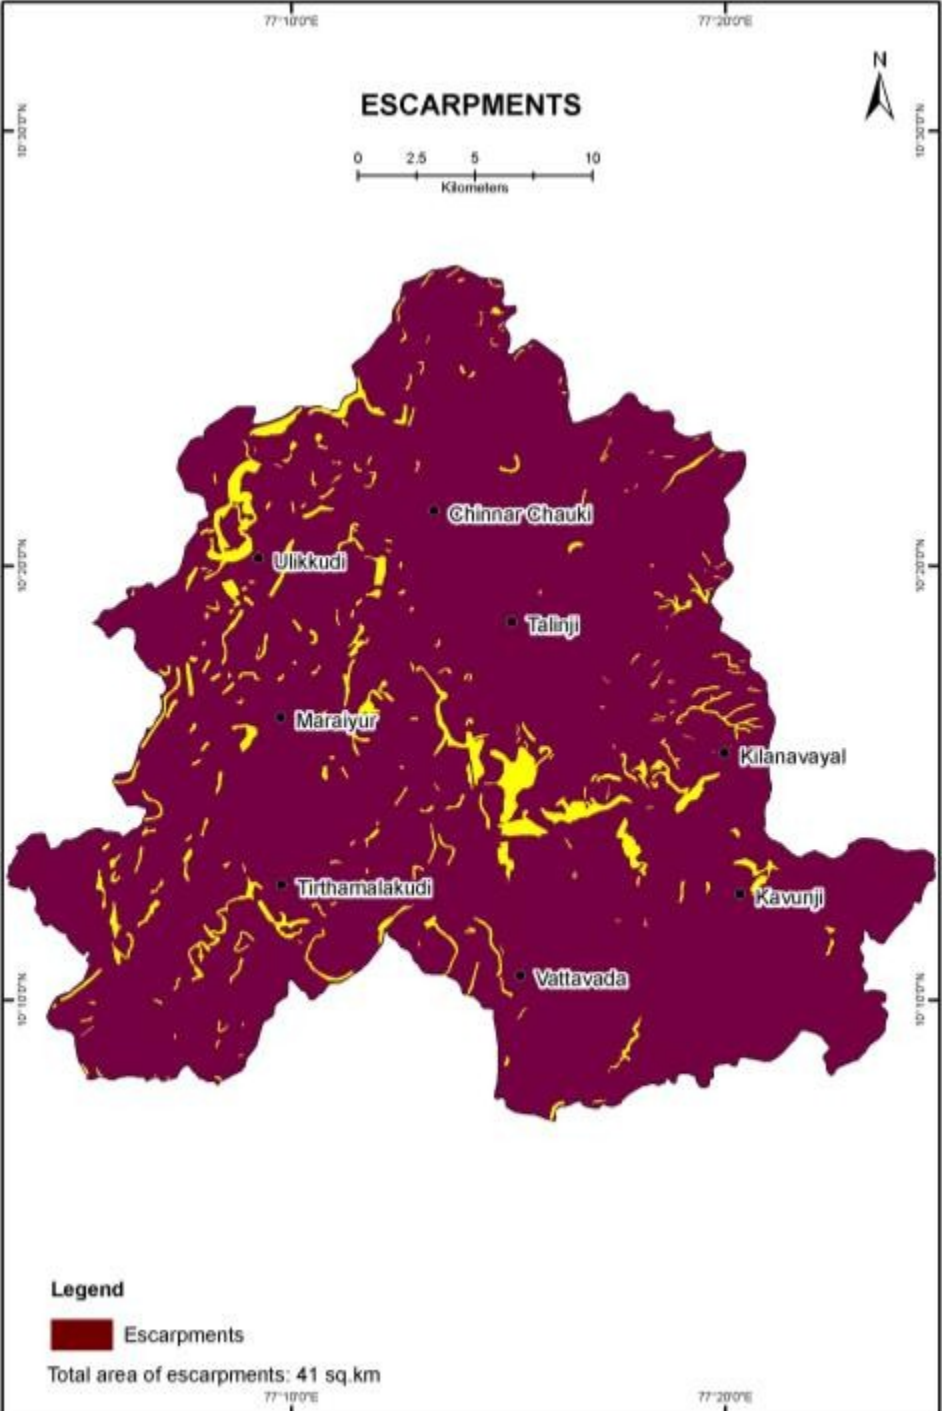

77°10'0"E 77°20'0"E

Parts of Western Ghats
SENSITIVE TOE MAP
(Amaravati Reservoir Catchment Area)

0 2.5 5 10
Kilometers



N.10°30'0"N

N.10°20'0"N

N.10°10'0"N

N.10°30'0"N

N.10°20'0"N

N.10°10'0"N



Legend

 Areas of Sensitive Toes

77°10'0"E

77°20'0"E


ROADS (100 m Buffered)



Legend

 100 m Buffered Road


SETTLEMENTS (1000 m Buffered)



Legend

-  Settlements
-  1000 m Buffered Settlements zones

ACTIVE - PASSIVE SLOPES

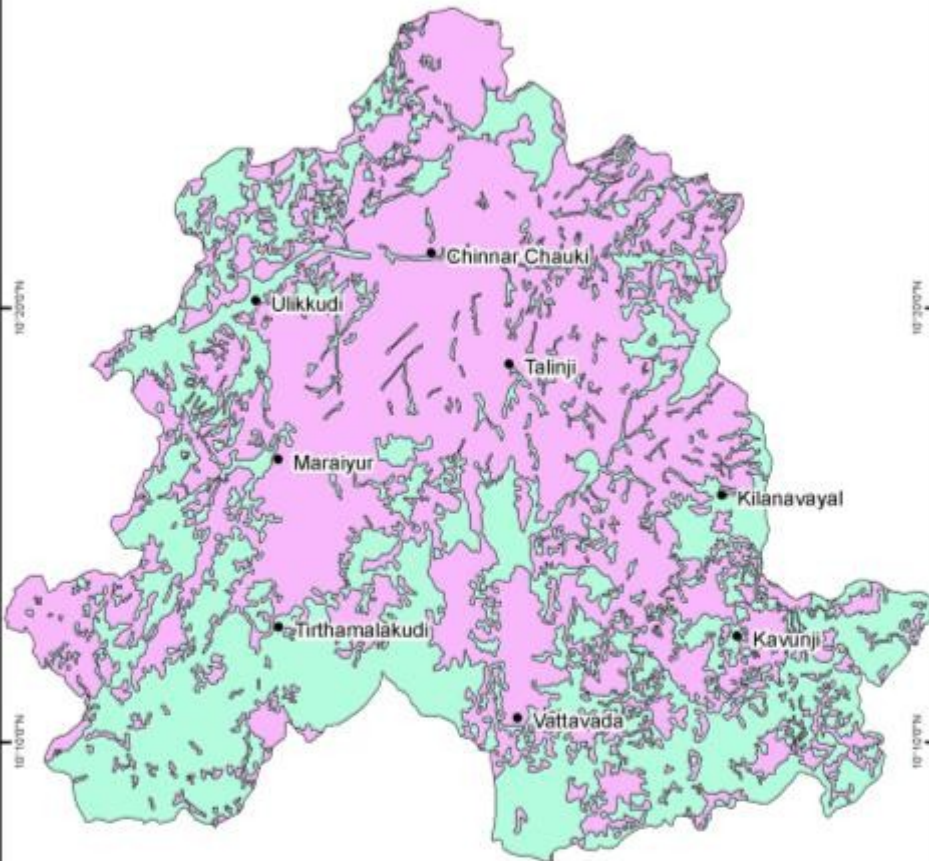

Legend

- Active slopes
- Passive slopes

Ranking of themes for Landslide analysis



Sl. No	Theme	Range of Ranking			
		Rank-1	Rank-2	Rank-3	Rank-4
	Drainage Density				
	Lineament Density				
	Lithology				
	Soils				
	Rainfall				
	Geomorphology				
	Landuse/ Landcover				
	Road 100 m buffered				
	Settlement 1000 m buffered				
	Slopes				

Integration Analysis

Integration Analysis for Hazardous slopes

INTEGRATED SLOPE MAP - LEVEL II

Level-I vs Concave-Plain-Convex slopes

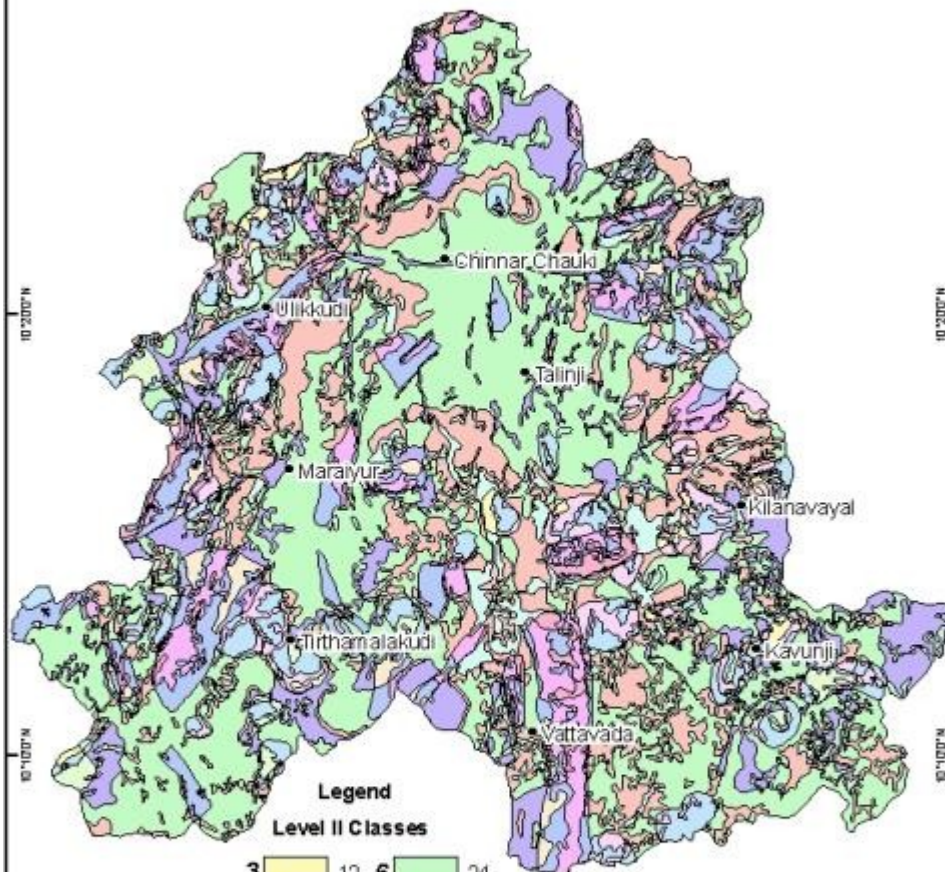

Legend

Level II Classes

3	12	6	24
4	13	7	25
5	14	5	32
6	15	6	33
4	22	7	34
5	23	8	35

In the legend boxes, the first digit to the right of the boxes denotes the rank of Level-I and the second digit denotes the rank of Concave-Plain-Convex slopes whereas the digit to the left of the boxes show the cumulative ranks of the polygon.

12 groups of classes having 6189 polygons

Integration Analysis for Landslide Hazard/vulnerability Zonation map

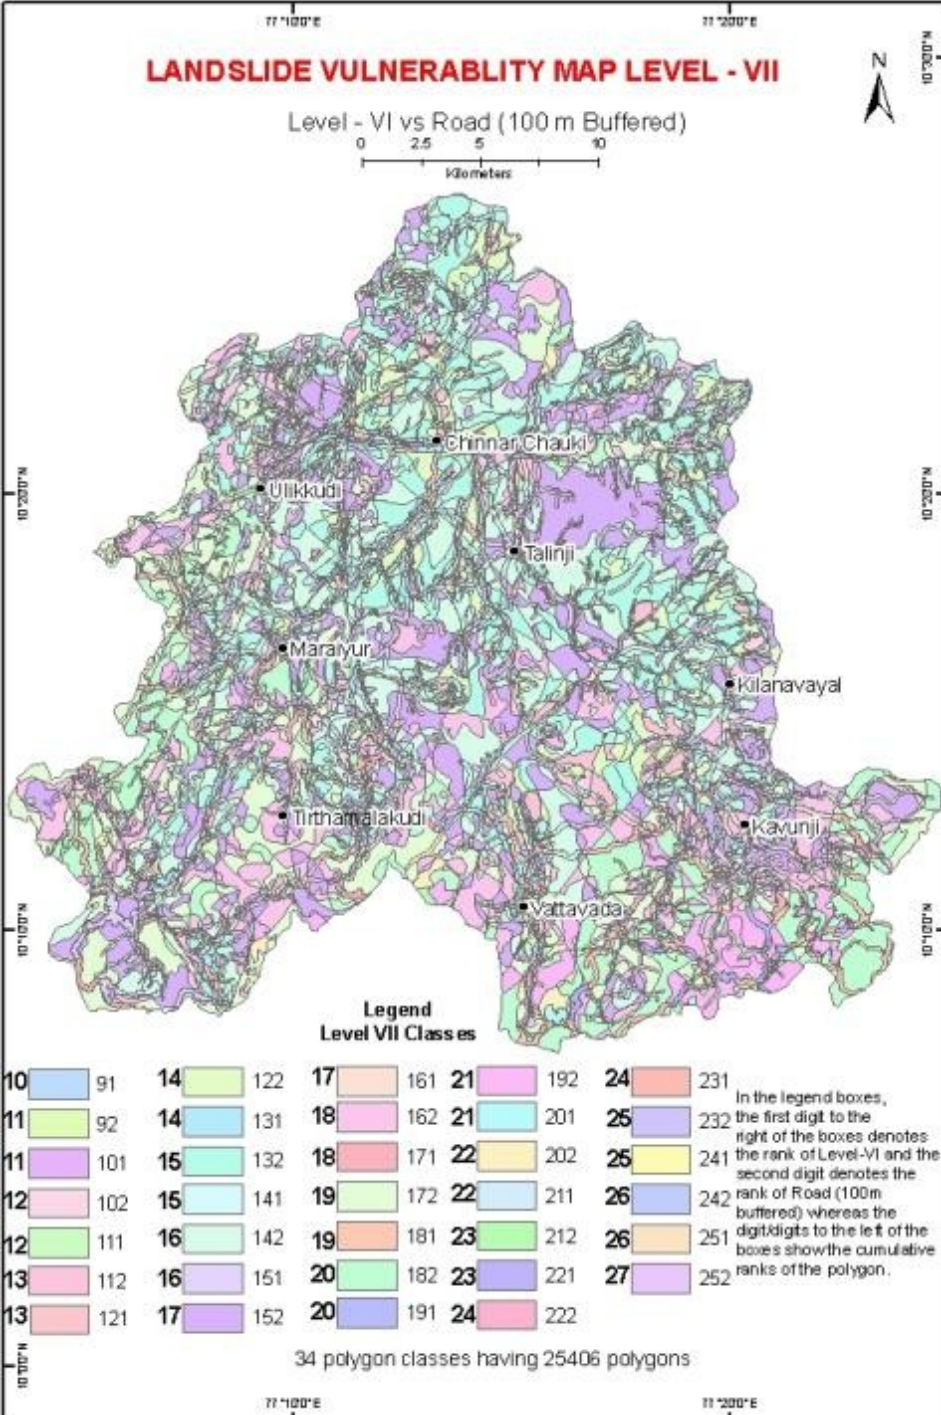


Fig. 4.13



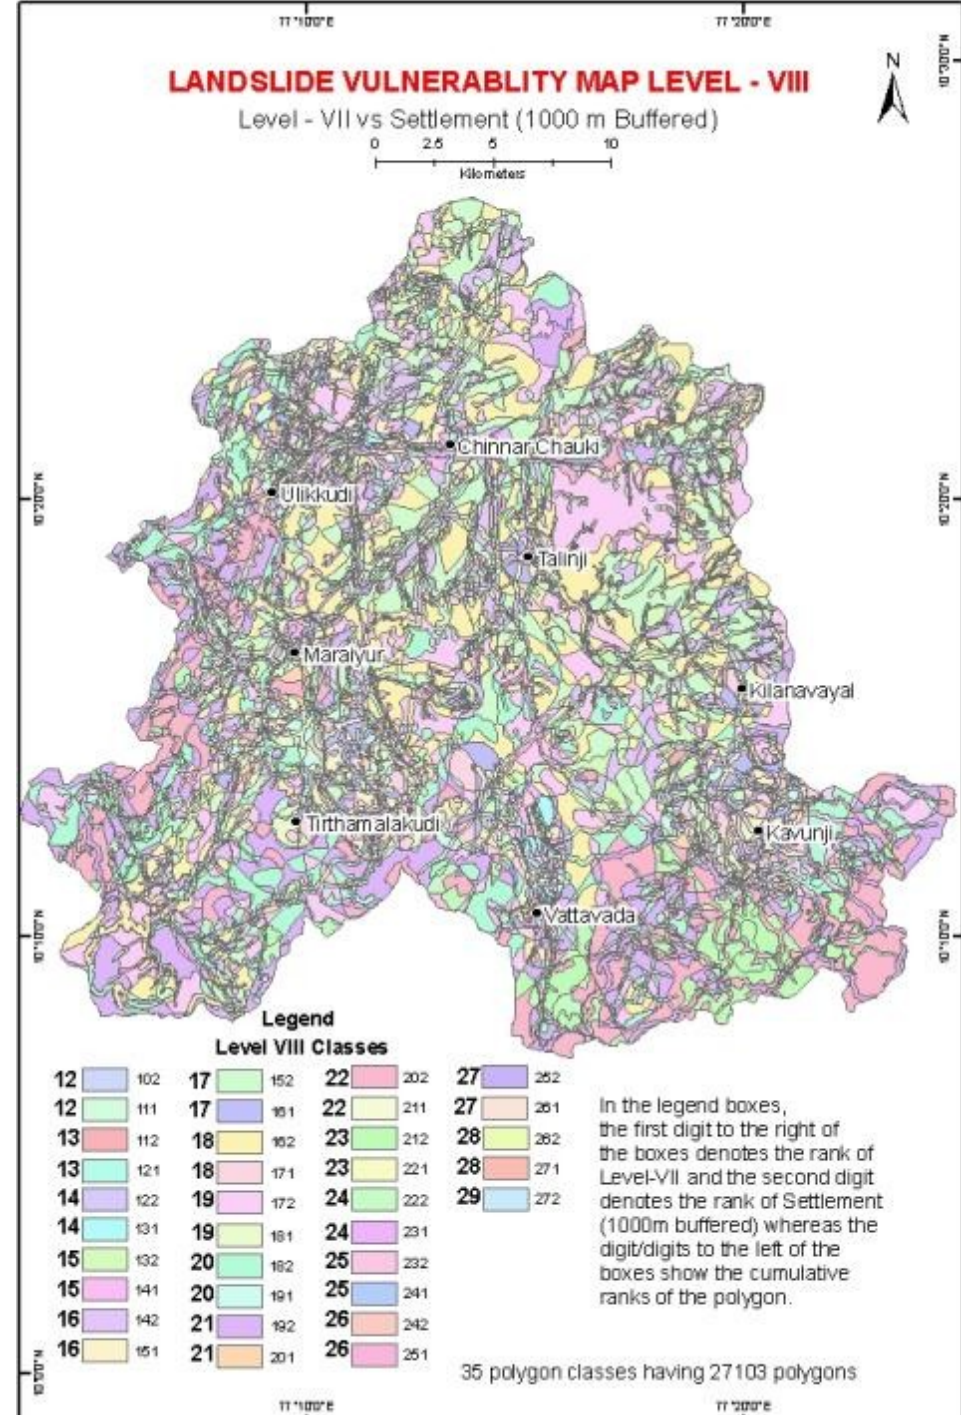


Fig. 4.14

LANDSLIDE VULNERABILITY MAP LEVEL - IX

Level - VIII vs Integrated slopes

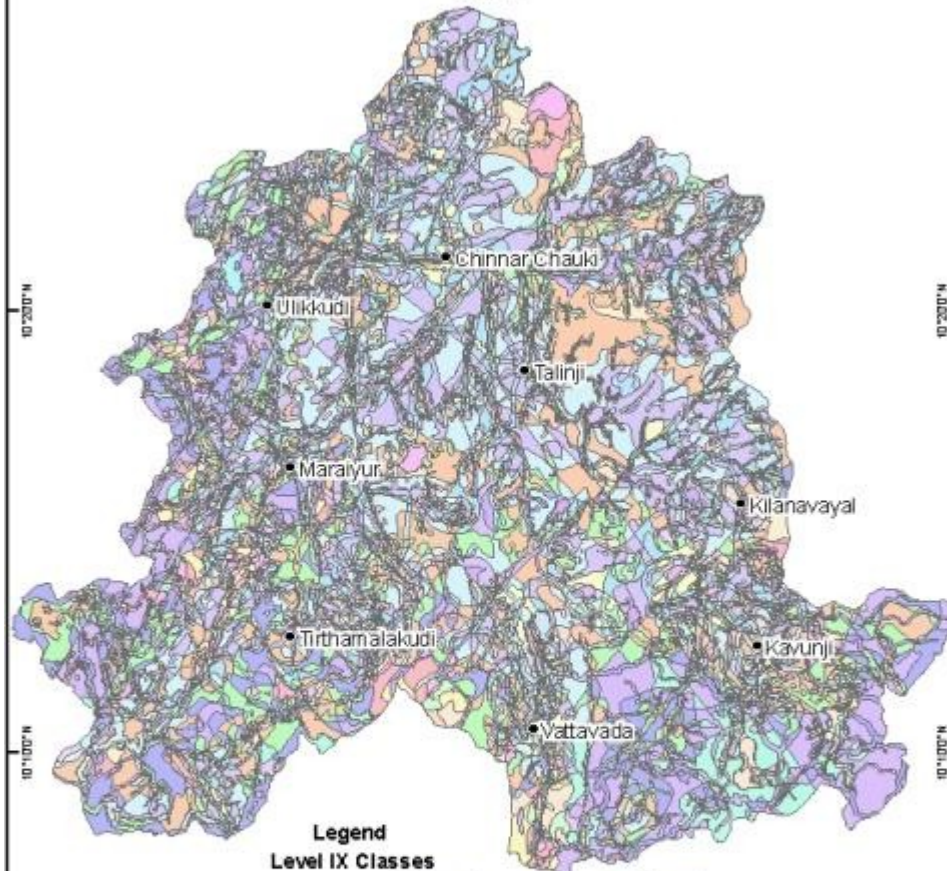



Legend

Level IX Classes


14	122	17	161	21	192	25	223	27	261	31	282
15	123	18	162	22	193	24	231	28	262	32	283
15	132	19	163	21	201	25	232	29	263	52 polygon classes having 36106 polygons	
16	133	18	171	22	202	26	233	28	271		
15	141	19	172	23	203	25	241	29	272	In the legend boxes, the first digit to the right of the boxes denotes the rank of Level-VIII and the second digit denotes the rank of Integrated slopes whereas the digit/digits to the left of the boxes show the cumulative ranks of the polygon.	
16	142	20	173	22	211	26	242	30	273		
17	143	19	181	23	212	27	243	29	281		
16	151	20	182	24	213	26	251	30	282		
17	152	21	183	23	221	27	252	31	283		
18	153	20	191	24	222	28	253	30	291		

LANDSLIDE HAZARD ZONATION MAP

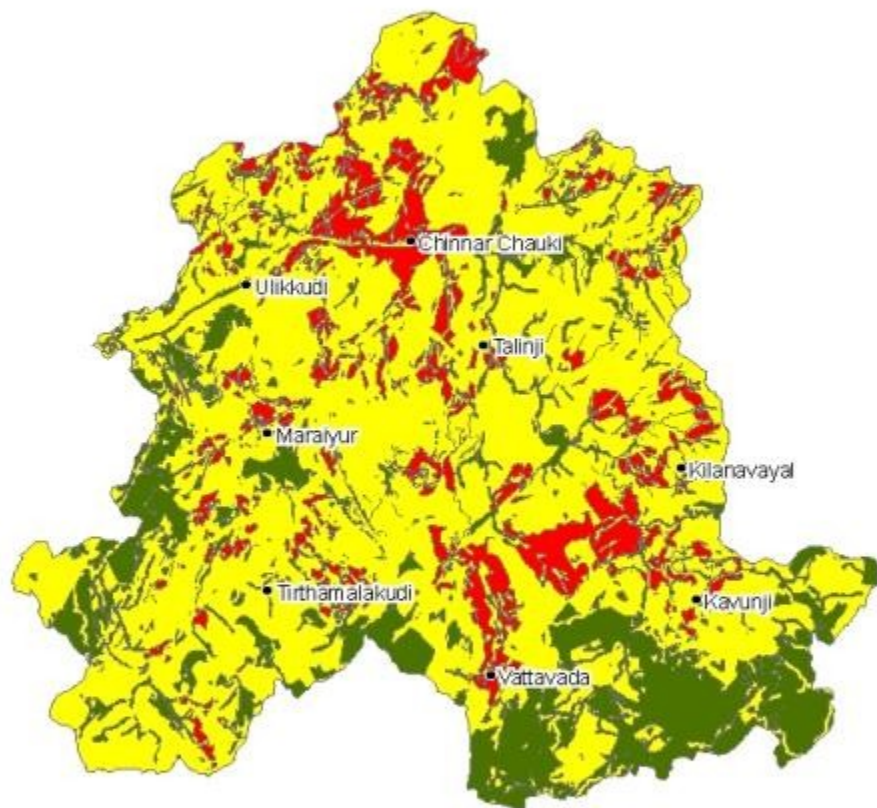


Legend

-  Most vulnerable areas for Landslides (ranks 14-18)
-  Moderately vulnerable areas for Landslides (ranks 19-25)
-  Least vulnerable areas for Landslides (ranks 26-32)

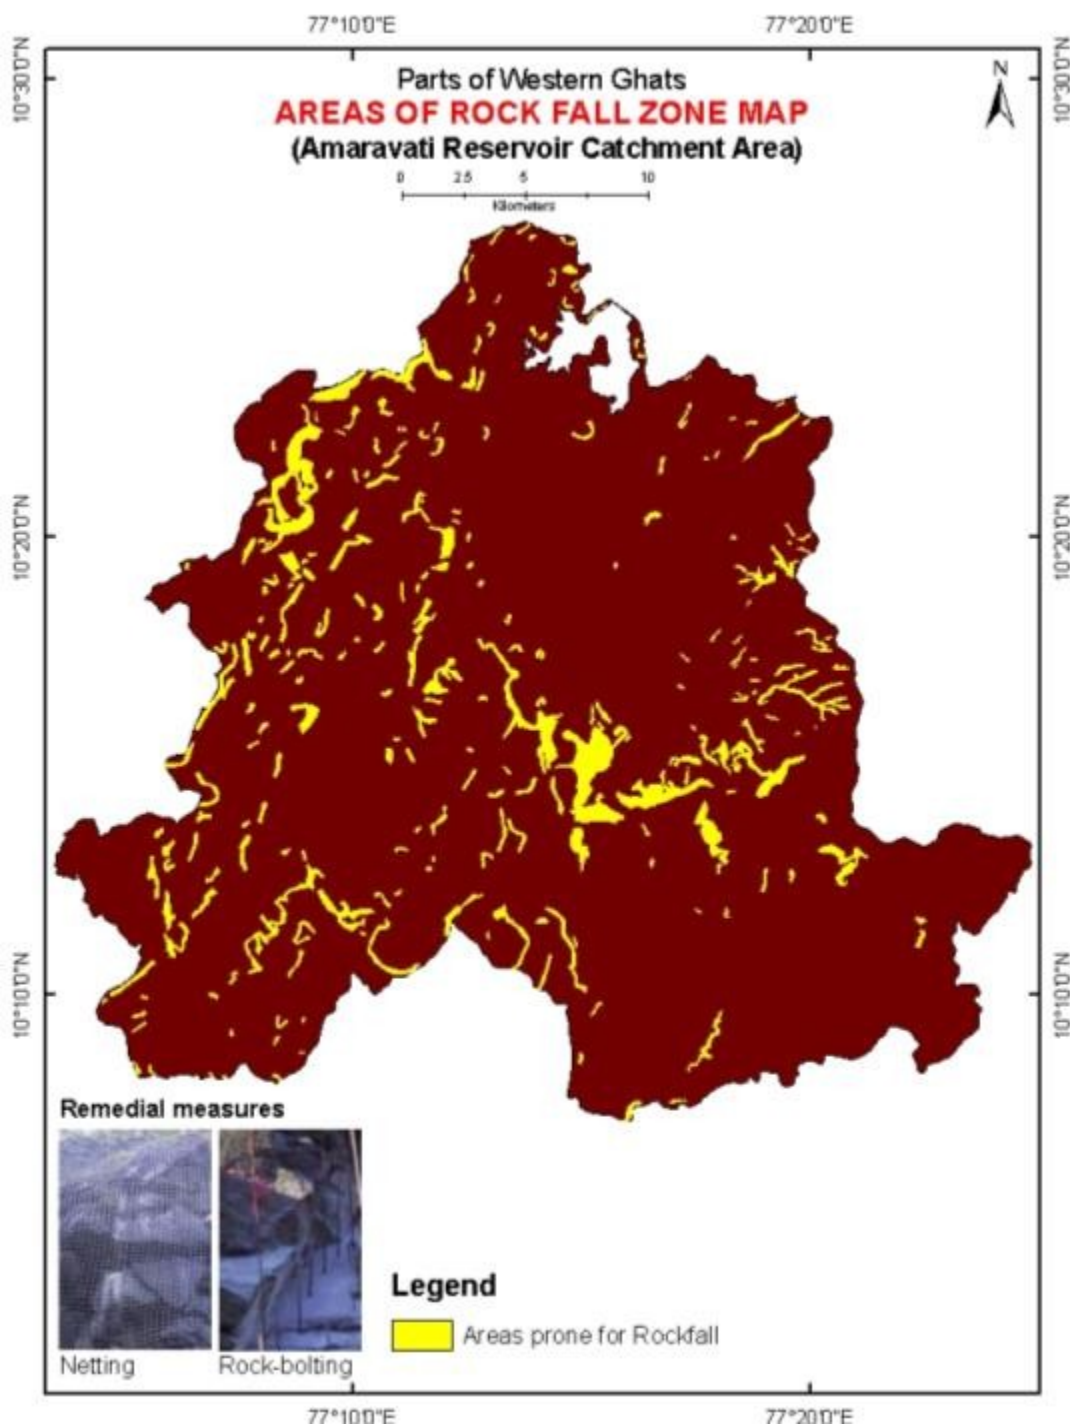


Mitigation measures:

-
-

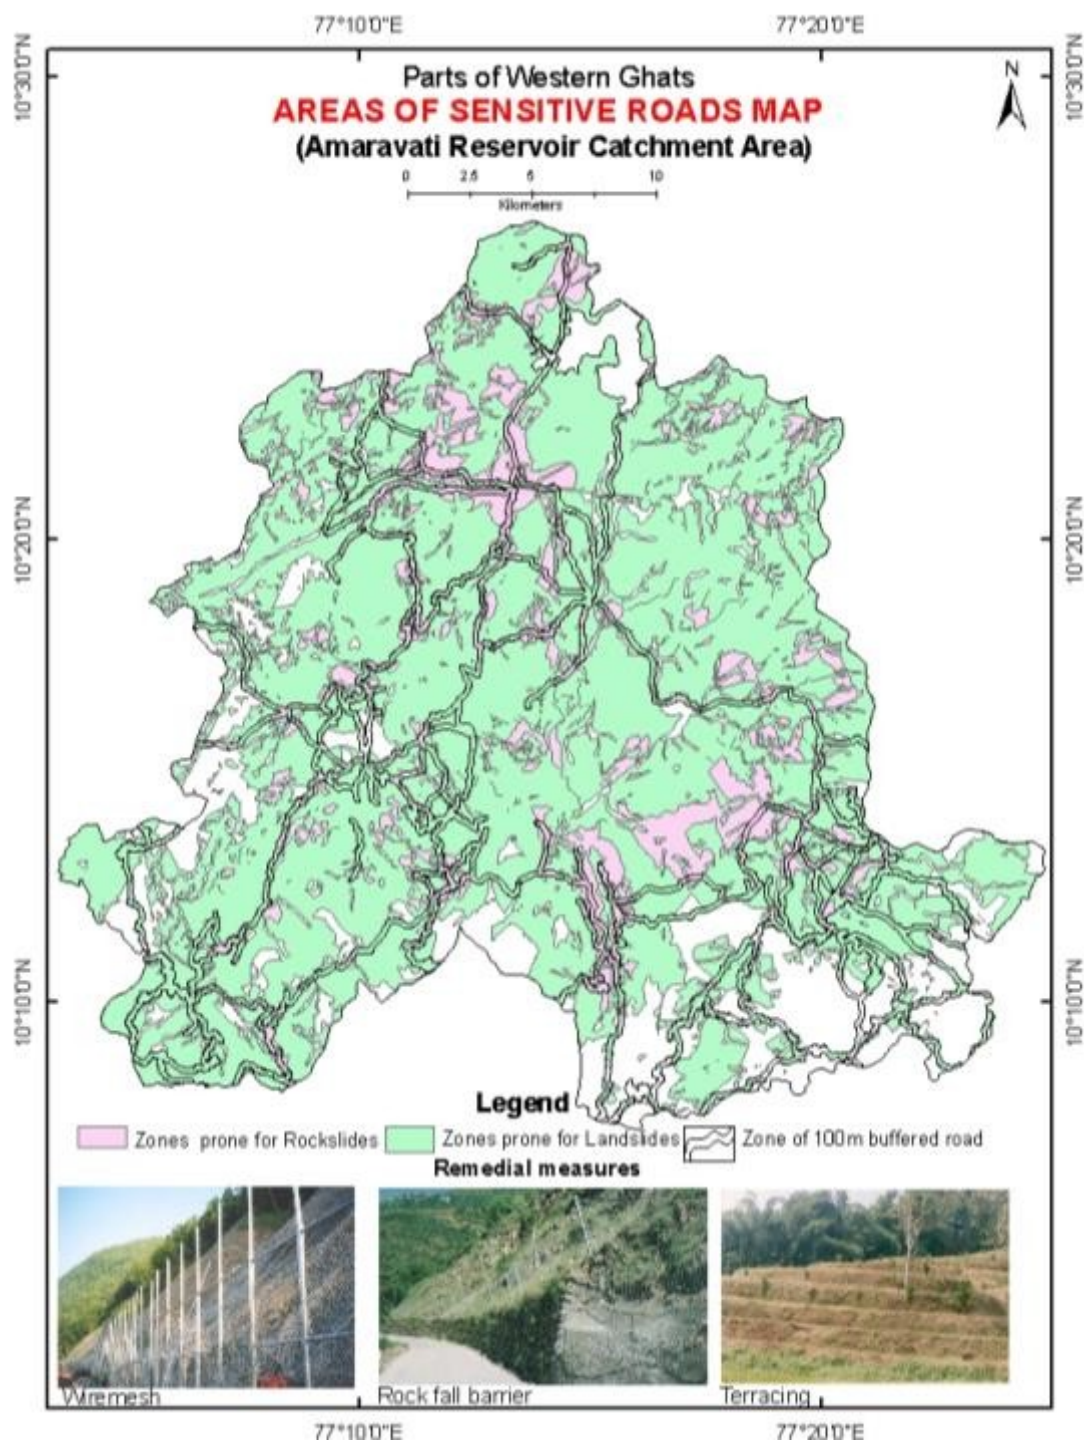

Mitigation measures:

-
-
-
-

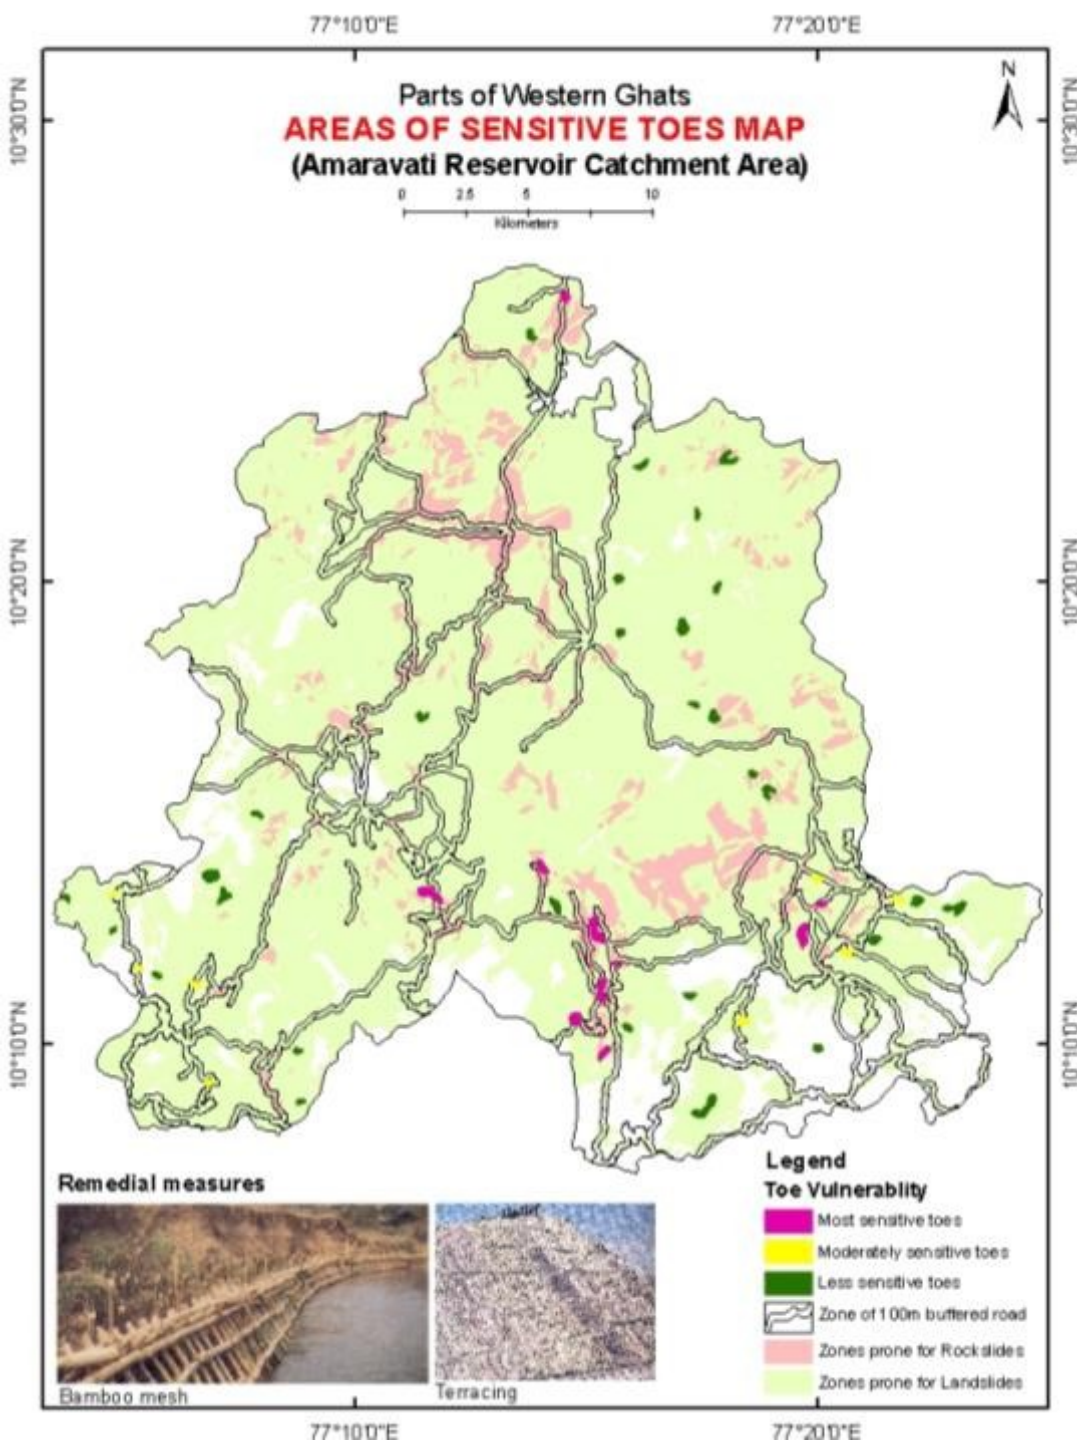

Mitigation measures:

-
-

Nilgiri Landslide

ROCKFALL



ROCKSLUMP



ROCKSLIDE



LANDSLIP



LANDSLIP



TRANSLATIONAL SLIP



Landslide classification:

- Rock fall
- Rock slide
- Rock slip
- Landslip

rotational slip

translation slip

- Debris avalanche
- Soliflution

NILGIRI Landslides : (144 nos)

Rock fall 27

Rock slump 17

Rock slide 29

Landslip 65

Debris avalanche 3

Solifluction 3

LANDSLIDE CONTROLLING FACTORS

Bedrock Geology	Quaternary Geology
Geomorphology	Weathering
Erosion and Deposition	Climate
Vegetation	Pedology
Hydrogeology	Geotechnical
Volcanic Activity	Neotectonics and Seismicity
Human Activity	Land Use

Integrated Land system Analysis and LHZ

Integrated Land system Analysis and LHZ

METHODOLOGY

Selection of test site of 300 -350 sq.km

Having at least 200 – 250 landslides/Scares

Interpretation of large format satellite data & topo sheets, geophysical survey, collection of collateral data and preparation of maps on

- * Lithology**
- * Lineament Density, Lineament Frequency and Lineament intersection Density**
- * Geomorphology**
- * Slope**
- * Drainage density**
- * Soil**
- * Thickness of Top Soil & WZ**
- * Landuse / land cover**

- ➡ **Plotting of Landslide incidence over various thematic maps, histogram analysis and detection of threshold zones in each variables**
- ➡ **Preparation of buffered GIS images**
- ➡ **Integration of all GIS images and preparation of LHZ along with controlling variable**
- ➡ **This LHZ will have innumerable polygons of Land segments – each polygons having different combinations of Landslide inducing variables**
- ➡ **Validate this by cross referencing with Landslide incidence in that type area (check how many out of 200 landslides falls in priority area)**

KEY MAP

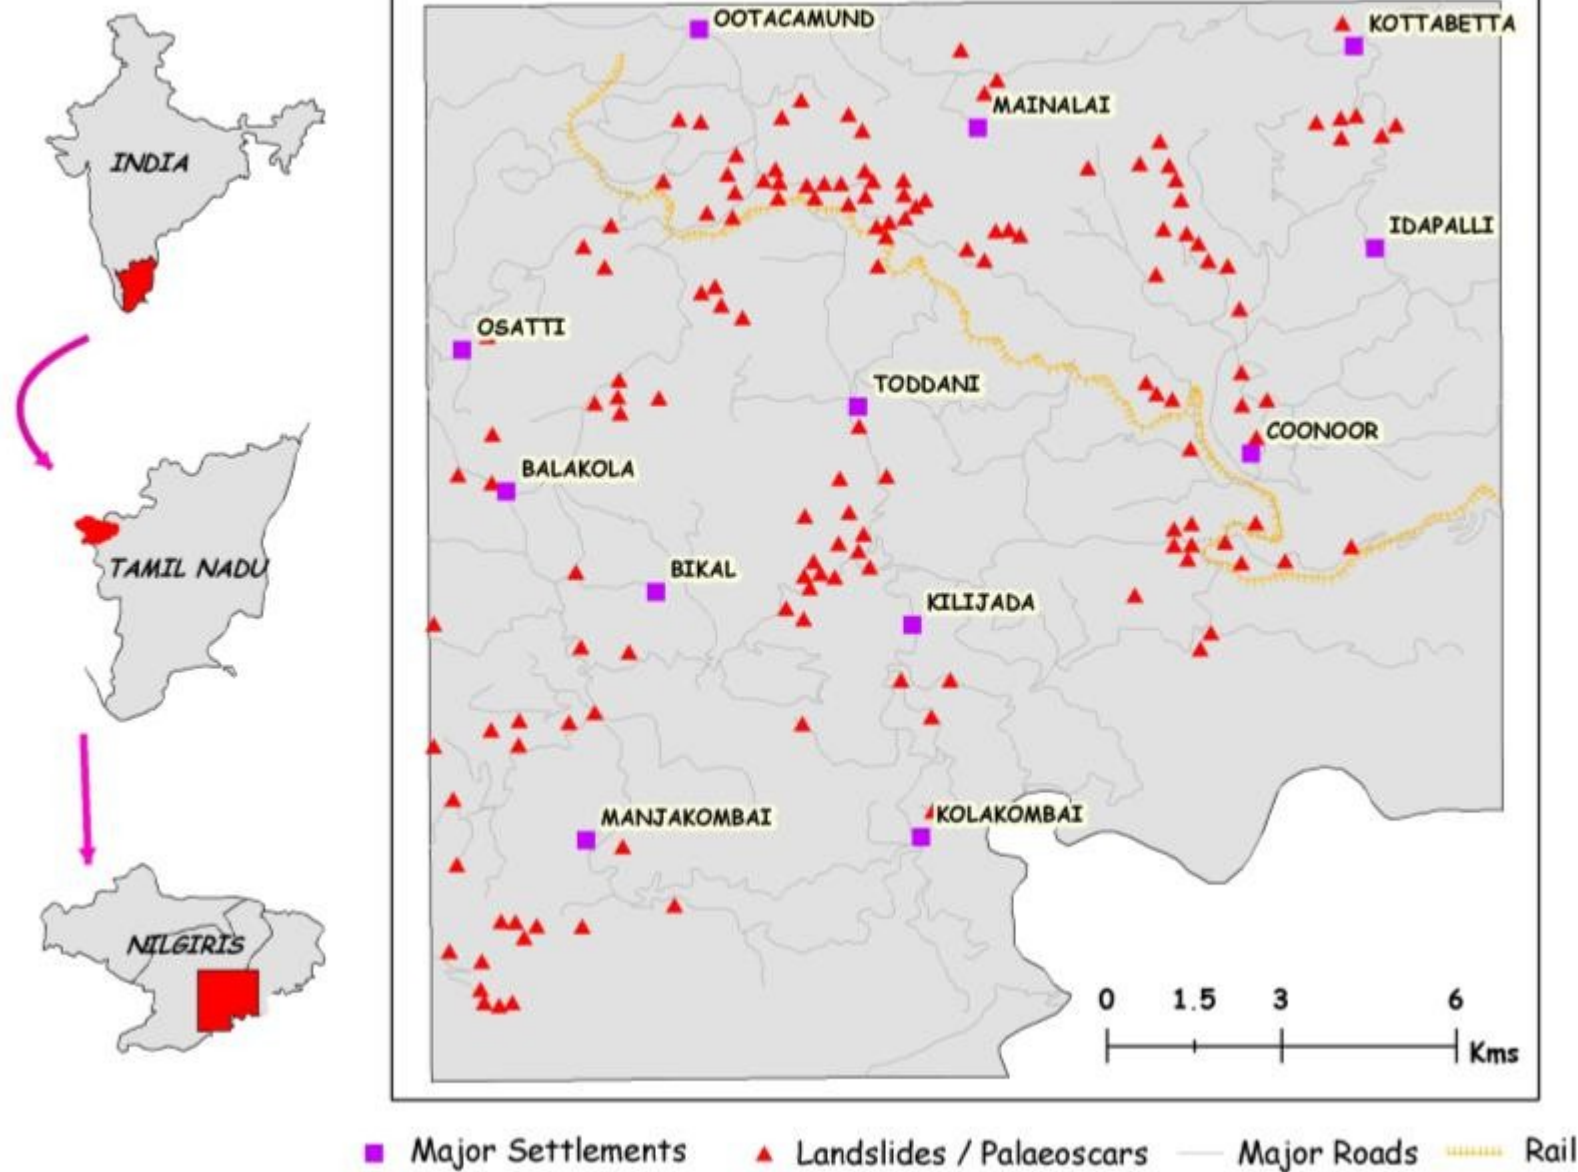


FIG. 1

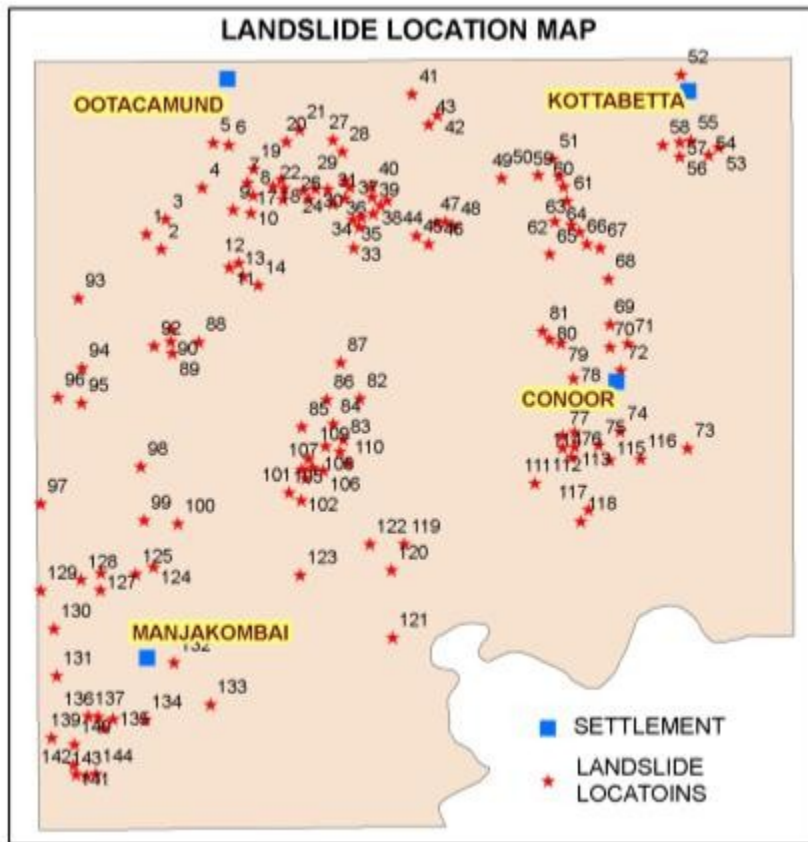


Fig. 2A

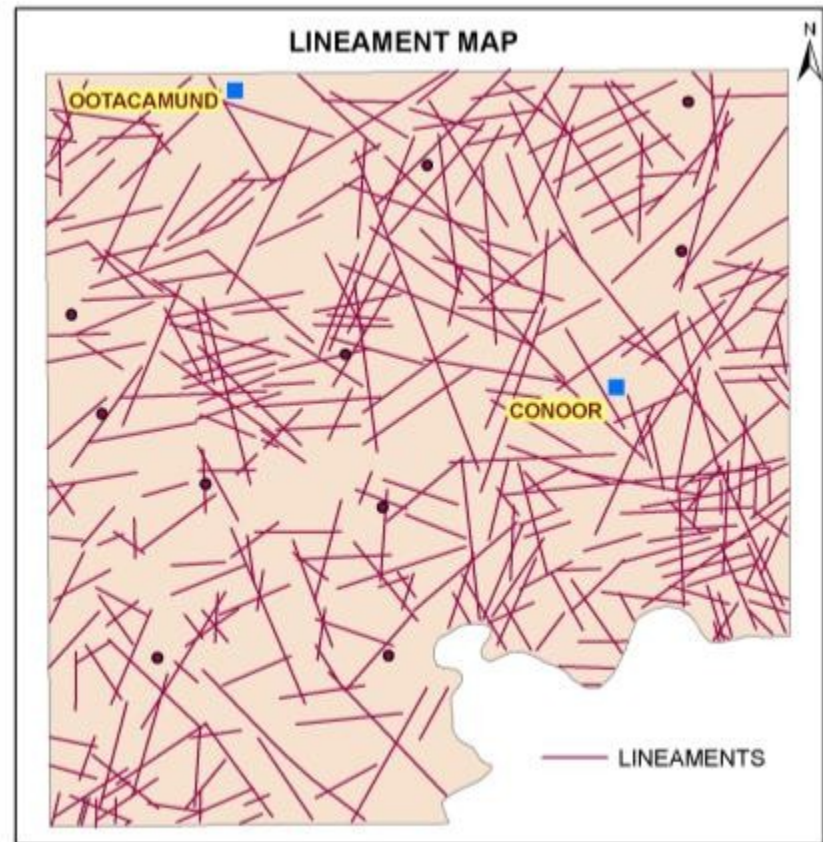


Fig. 2B

LINEAMENT FREQUENCY




LEGEND



★ PALAEOSCARS

Fig. 3A

LINEAMENT FREQUENCY Vs LANDSLIDES

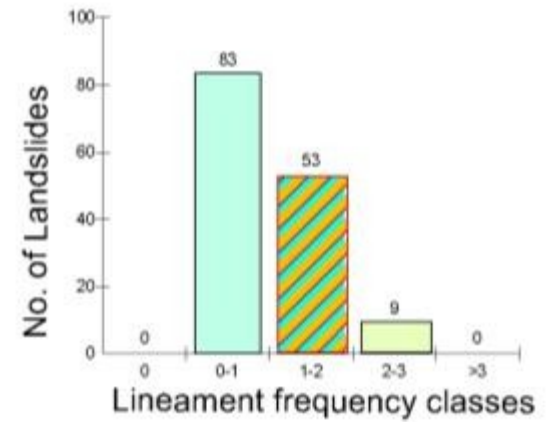

LINEAMENT FREQUENCY


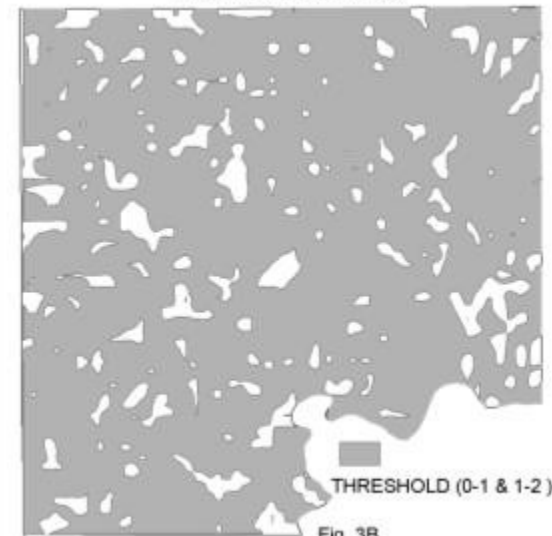


Fig. 3B


LINEAMENT DENSITY



Legend

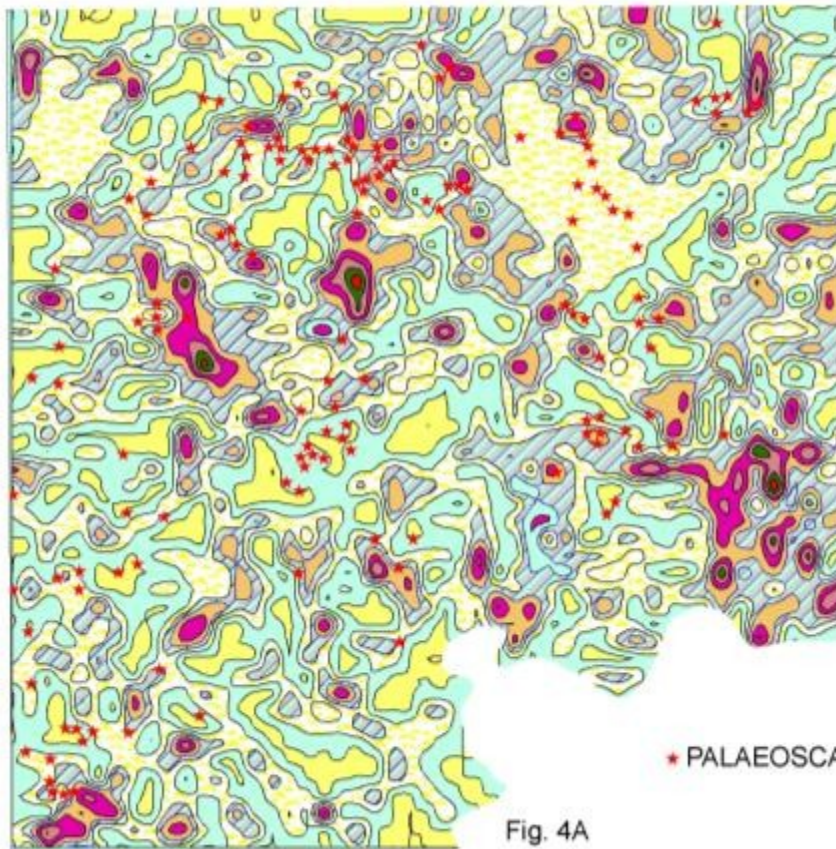

* PALAEOSCARS

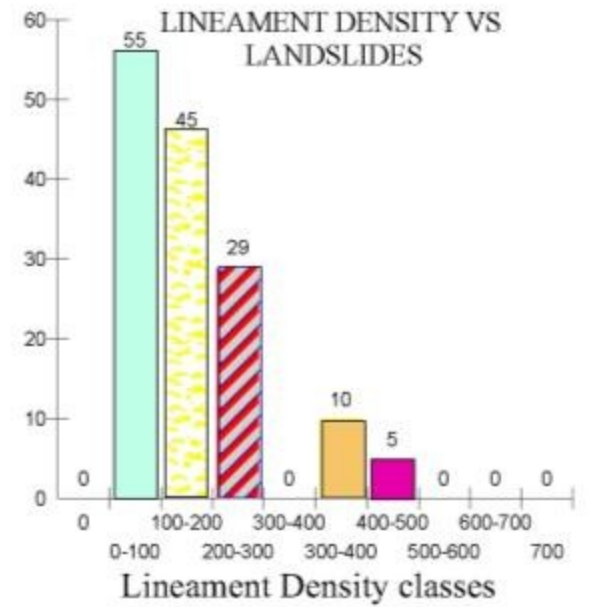

LINEAMENT DENSITY THRESHOLD


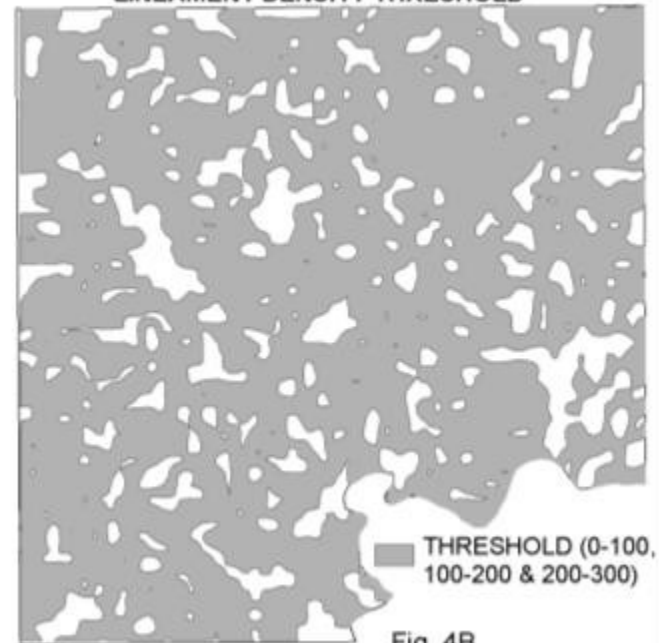


Fig. 4B

LINEAMENT INTERSECTION





Legend

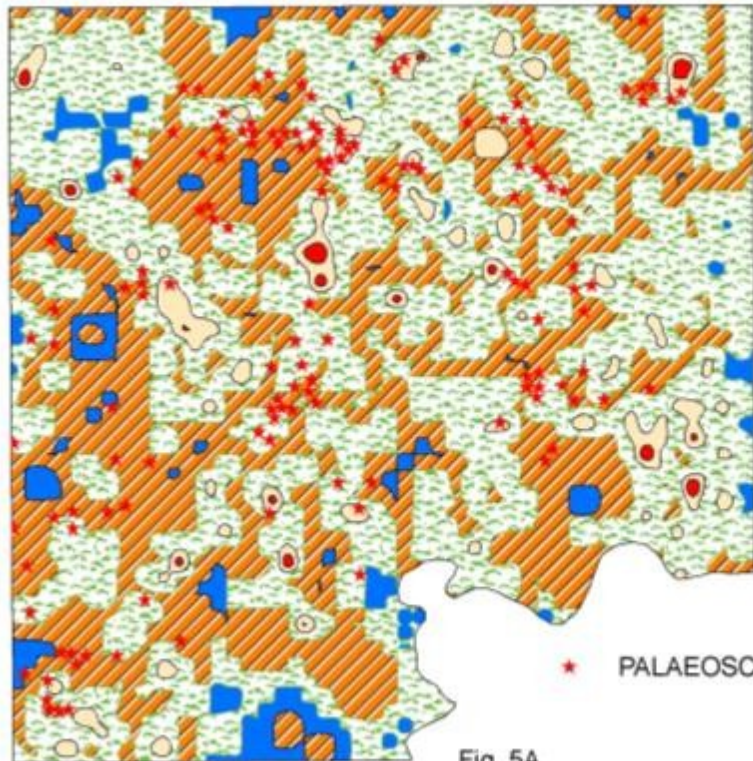

★ PALAEOSCARS

Fig. 5A

LINEAMENT INTERSECTION DENSITY VS LANDSLIDES

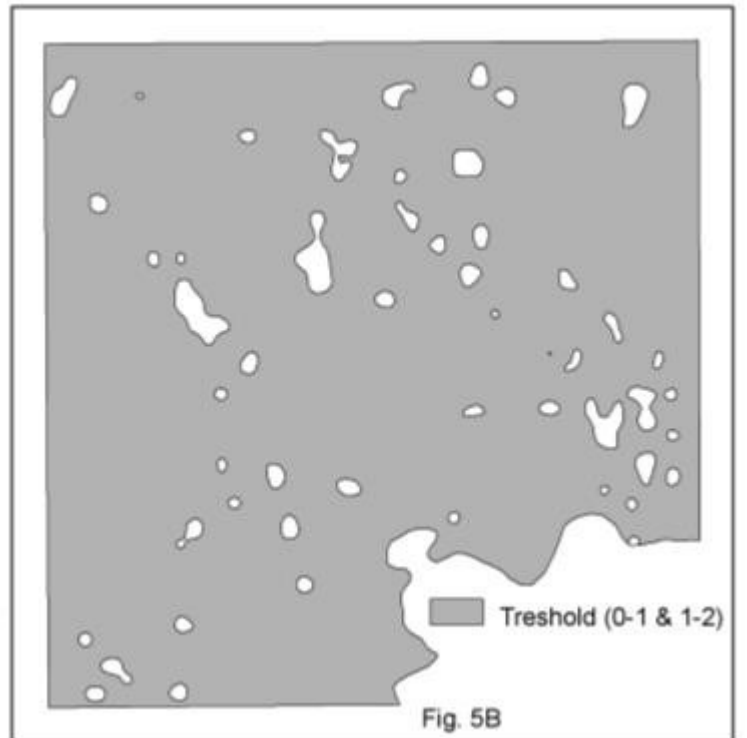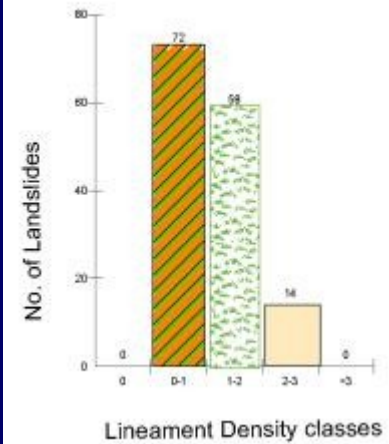

Threshold (0-1 & 1-2)

Fig. 5B


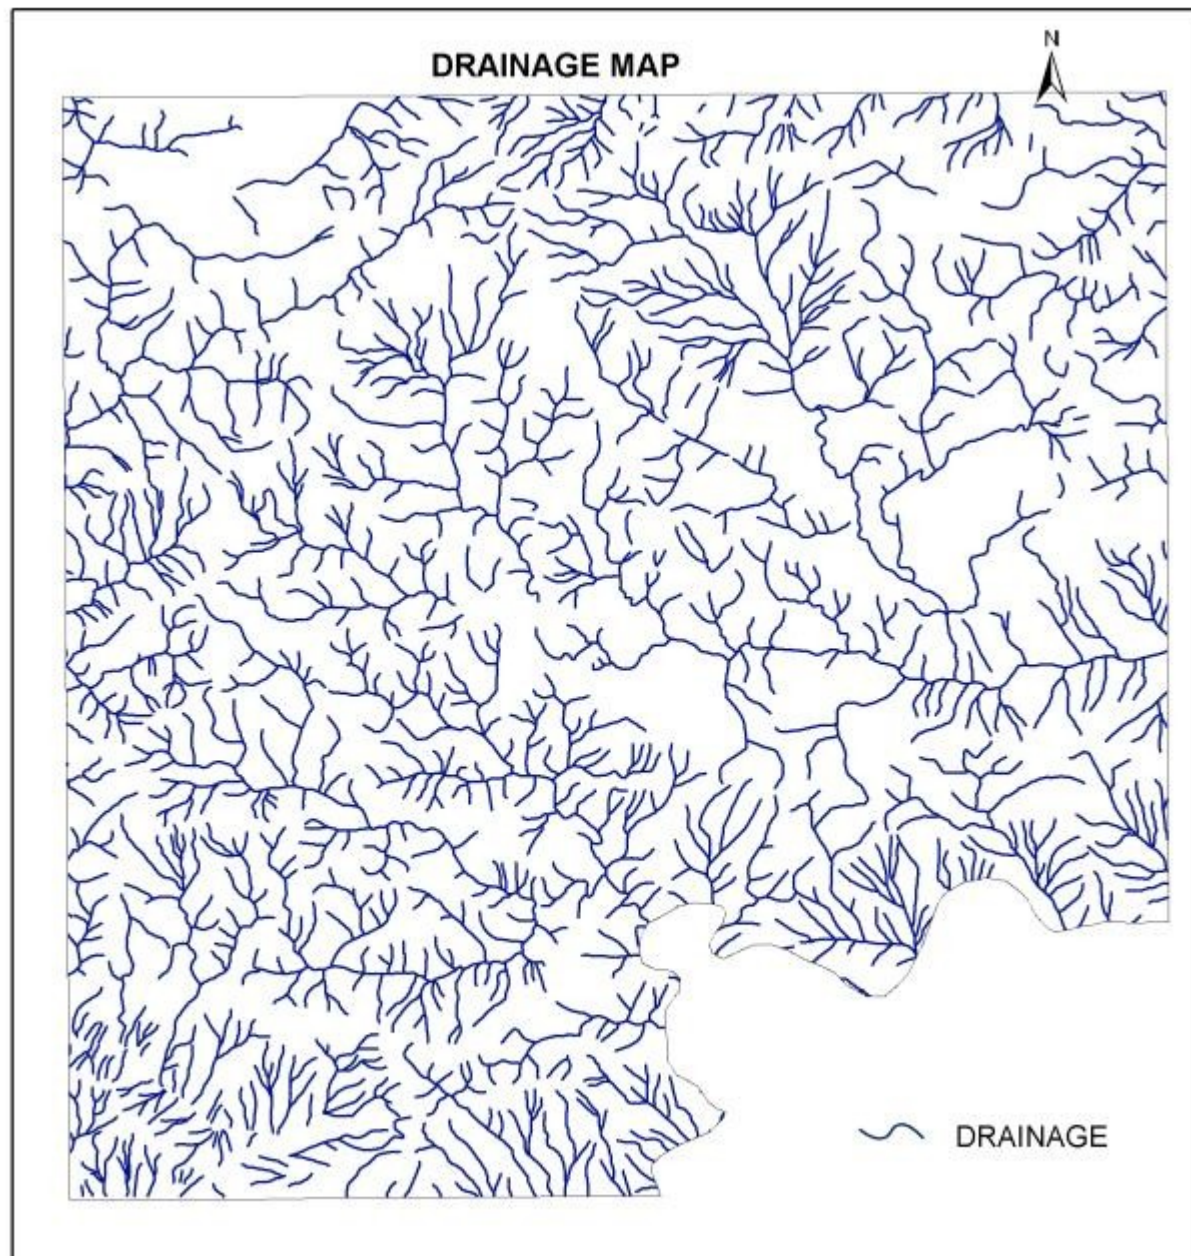


Fig. 6

DRAINAGE DENSITY



Legend

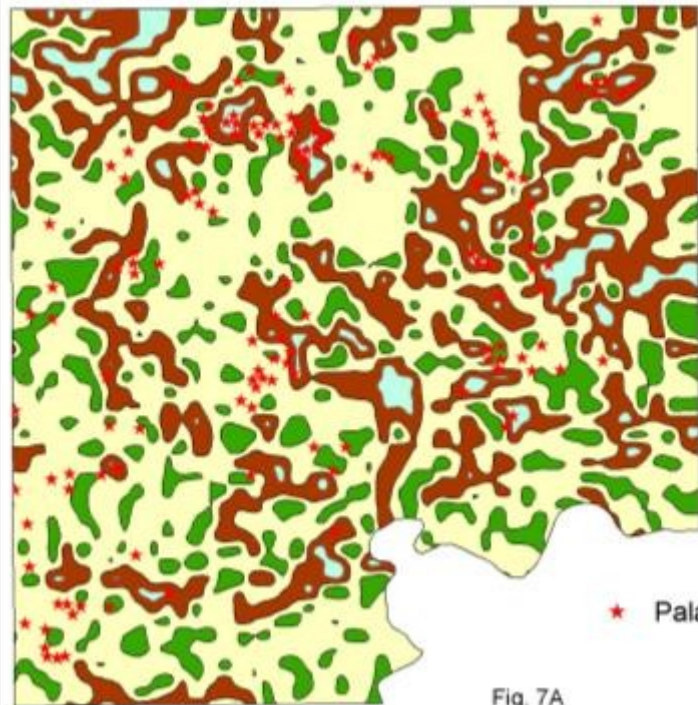

★ Palaeoscars

Fig. 7A

DRAINAGE DENSITY VS LANDSLIDES


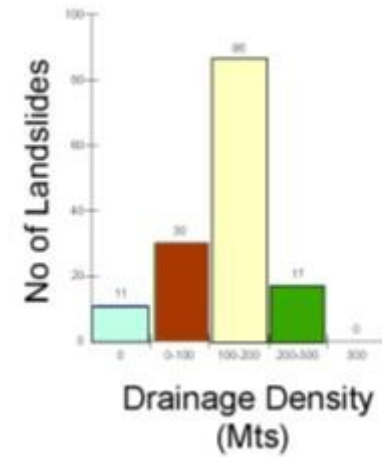


Fig. 7B


SLOPE MAP

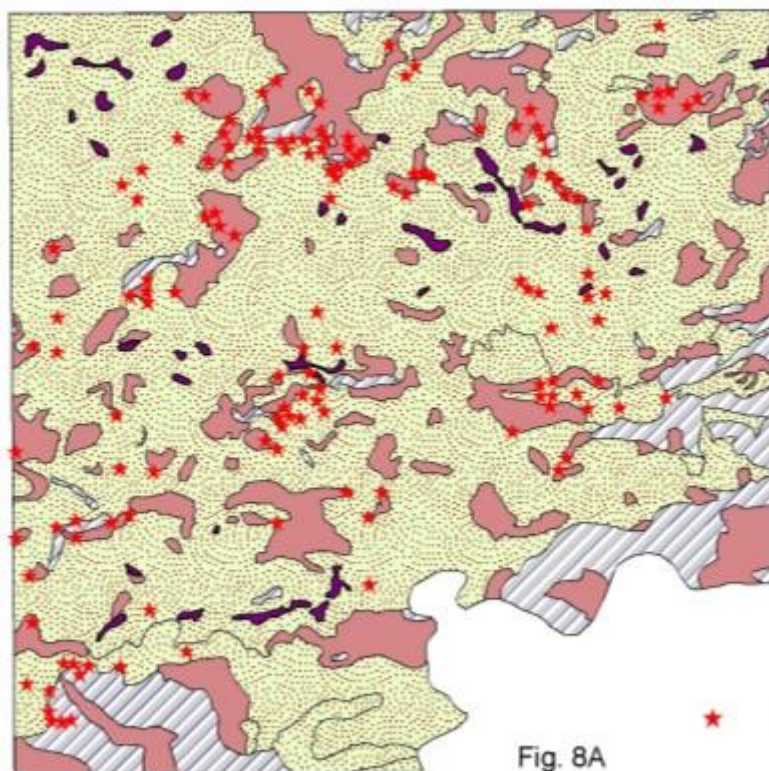

★ PALAEOSCARS

Fig. 8A

SLOPE CLASSES VS LANDSLIDES

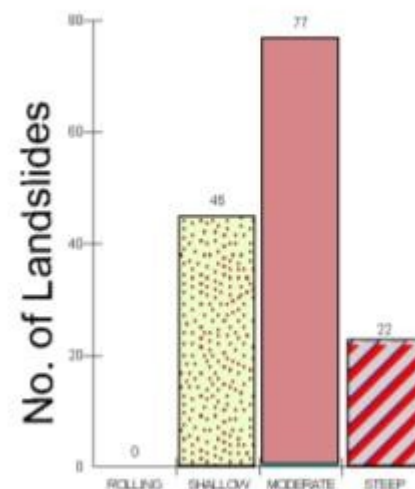

Slope Classes

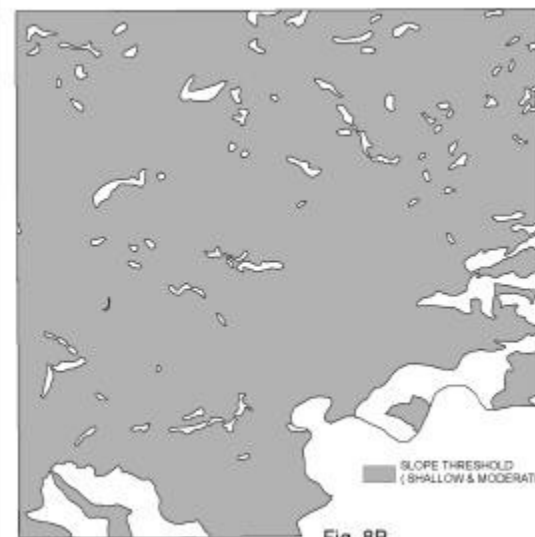


Fig. 8B

LANDUSE / LANDCOVER

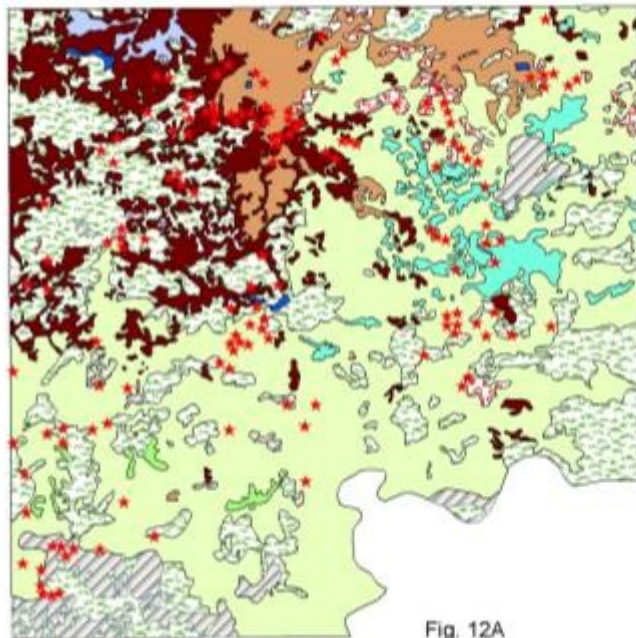


Fig. 12A

Legend

- DENSE FOREST
- FOREST BLANK
- OPEN FOREST
- OPEN PLANTATION
- PLANTATION
- RESERVE FOREST
- SCRUB FOREST
- SETTLEMENT
- WATER BODY
- WATER LOGGED AREAS
- PALAEOSCARS

Landuse / Land cover Vs Landslides

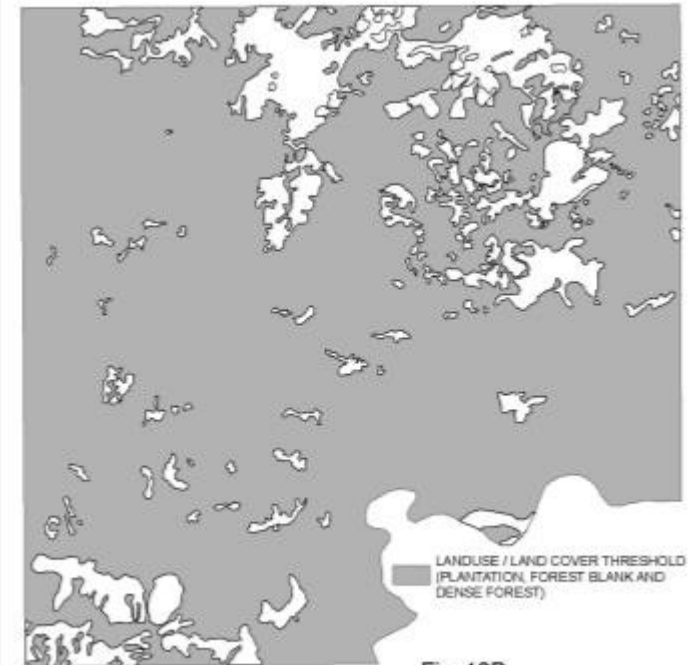
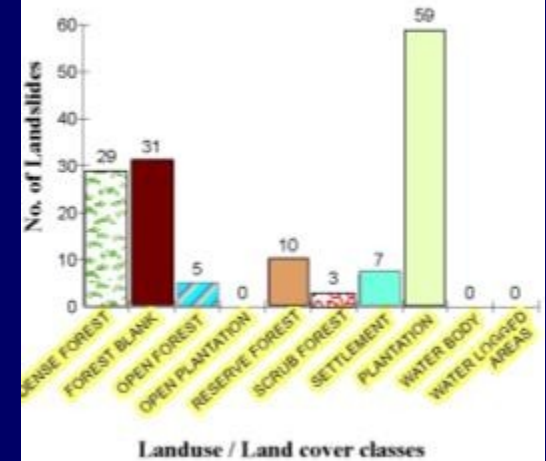


Fig. 12B

THICKNESS OF TOP SOIL

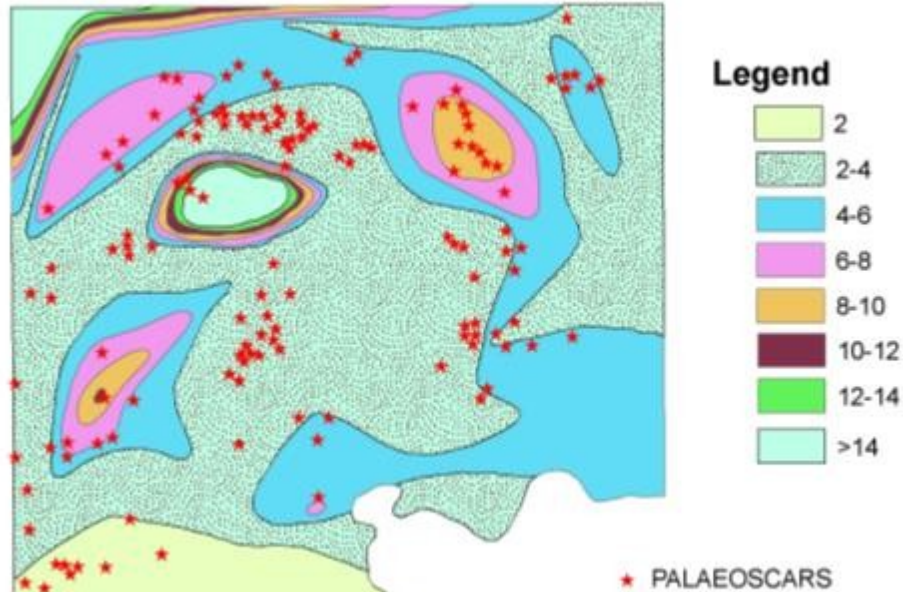


Fig. 13A

THICKNESS OF WEATHRED ZONES VSLANDSLIDES

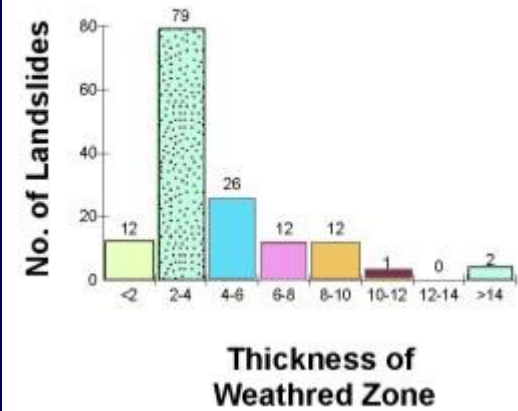


Fig. 13B

THICKNESS OF WEATHERED ZONE

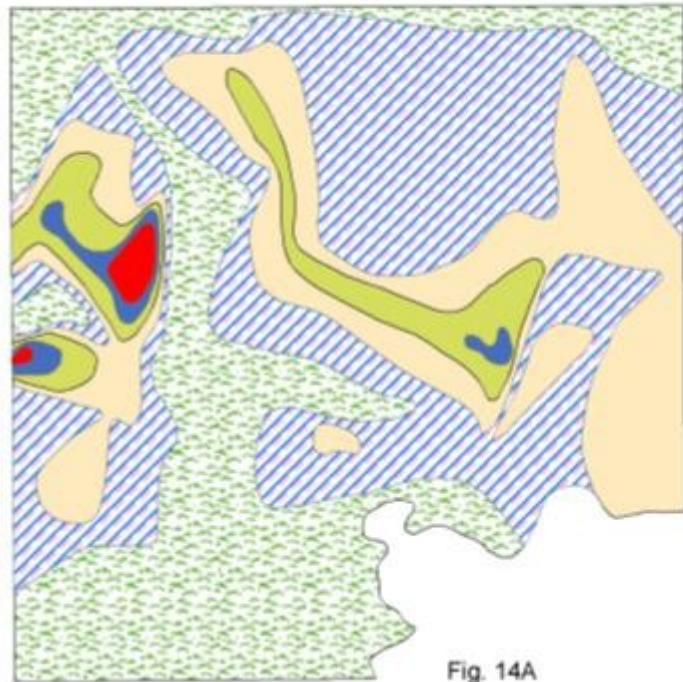


Fig. 14A

THICKNESS OF WEATHERED ZONE VS LANDSLIDES

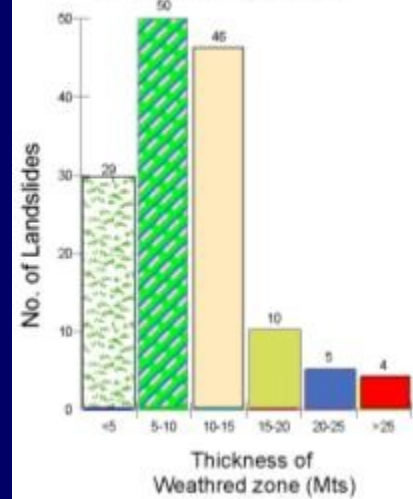


Fig. 14B

GIS MODELING

&

LANDSLIDE HAZARD ZONATION

LEVEL I GIS INTEGRATION:

Buffered layer of **lineament frequency**

Vs

lineament density

1. Lineament frequency controlled landslide zones.
2. Lineament density controlled landslide zones.
3. Lineament frequency and lineament density controlled landslide zones.
4. Area falling out of the above zones (other areas).

LEVEL I GIS INTEGRATION
(Lineament frequency Vs Lineament density)



-  Lineament frequency controlled Landslides zones
-  Lineament density controlled Landslides zones
-  Lineament frequency and density controlled Landslides zones
-  Areas falling out of above three zones

Fig. 15

LEVEL II GIS INTEGRATION:


Buffered layer of **Level I**

Vs

lineament Intersection

1. Lineament frequency controlled landslide zones.
2. Lineament density controlled landslide zones.
3. Lineament intersection controlled landslide zones.
4. Lineament frequency and lineament density controlled landslide zones.
5. Lineament frequency and lineament intersection controlled landslide zones.
6. Lineament intersection and lineament density controlled landslide zones.
7. Lineament frequency , lineament density and lineament intersection controlled landslide zones.
8. Area falling out of the above zones (other areas).

LEVEL II GIS INTEGRATION
(Level I Vs Lineament Intersection density)

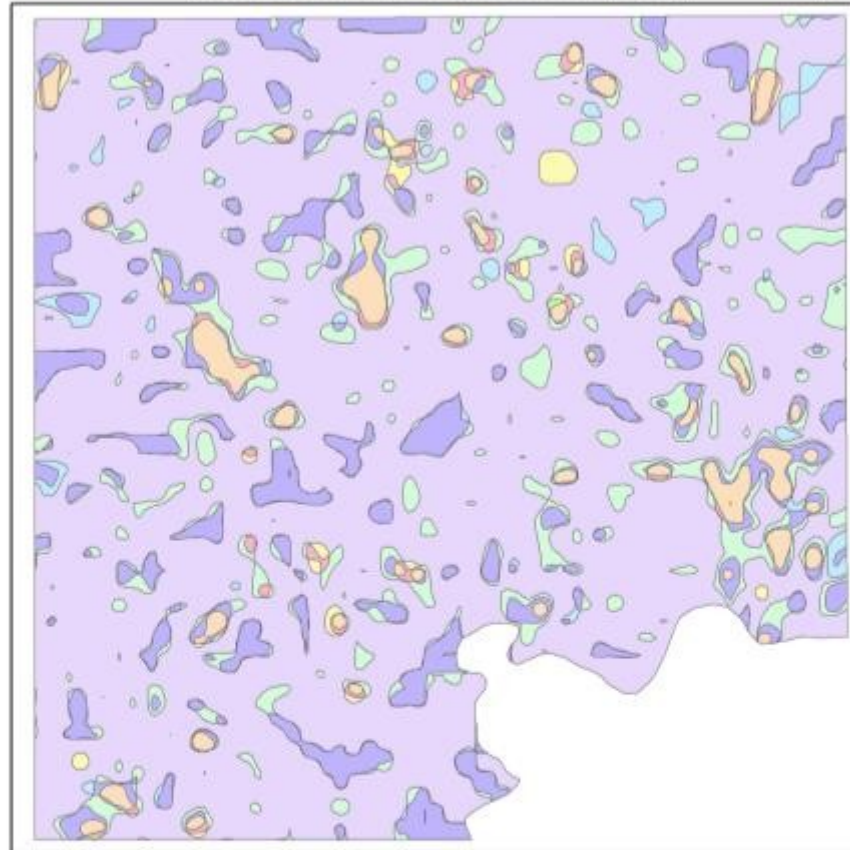

- Lineament frequency Lineament intersection and Lineament density controlled zones
- Lineament density and Lineament intersection controlled zones
- Lineament frequency and Lineament intersection controlled zones
- Lineament frequency and Lineament density controlled zones
- Lineament intersection alone controlled zones
- Lineament density alone controlled zones
- Lineament frequency alone controlled zones
- No influence zone

Fig. 16

FINAL INTEGRATION:

**Its yielded innumerable number of
polygons loaded with 7, 6, 5 , 4 , 3,
2 & 1 Parameters**


LANDSLIDE HAZARD ZONATION MAP

More than 5 parameters - **Most**

4 & 3 parameters - **Moderately**

Less than 2 parameters - **least**

Landslide Hazard Zonation

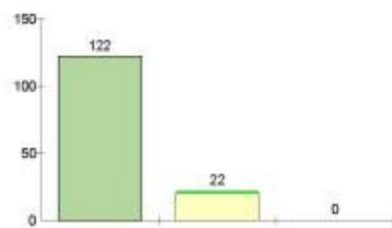

Legend

- Most Vulnerable Zone
- Moderately Vulnerable Zone
- Least vulnerable zone
- PalaeoScars

Fig. 17

REMEDIAL MEASURES:

Rainfall: Surface drains, Placement of netting, Concrete of reinforced concrete blanketing

Recharge: Subsurface drains like drainage slots provided with filter fabric and rubble fills, parallel piping with perforated pipes and inter connecting catch water drains

Soil Types: Geo textiling, physical compaction, chemical grouting and strengthening of soil by cement

Thickness of fracture and weathered zones:

Nailing and concrete grouting

Lineament density :


Nailing, Gully filled vegetation

Slope:
in

Retaining wall with ground anchor, reduction of load of the soil

the head of slope, stabilizing the toe by enlarging, terracing of the uneven downhill slope or flattening of the slope etc


LANDSLIDE HAZARD ZONATION USING NEW GIS BASED SLOPE CLASSIFICATION

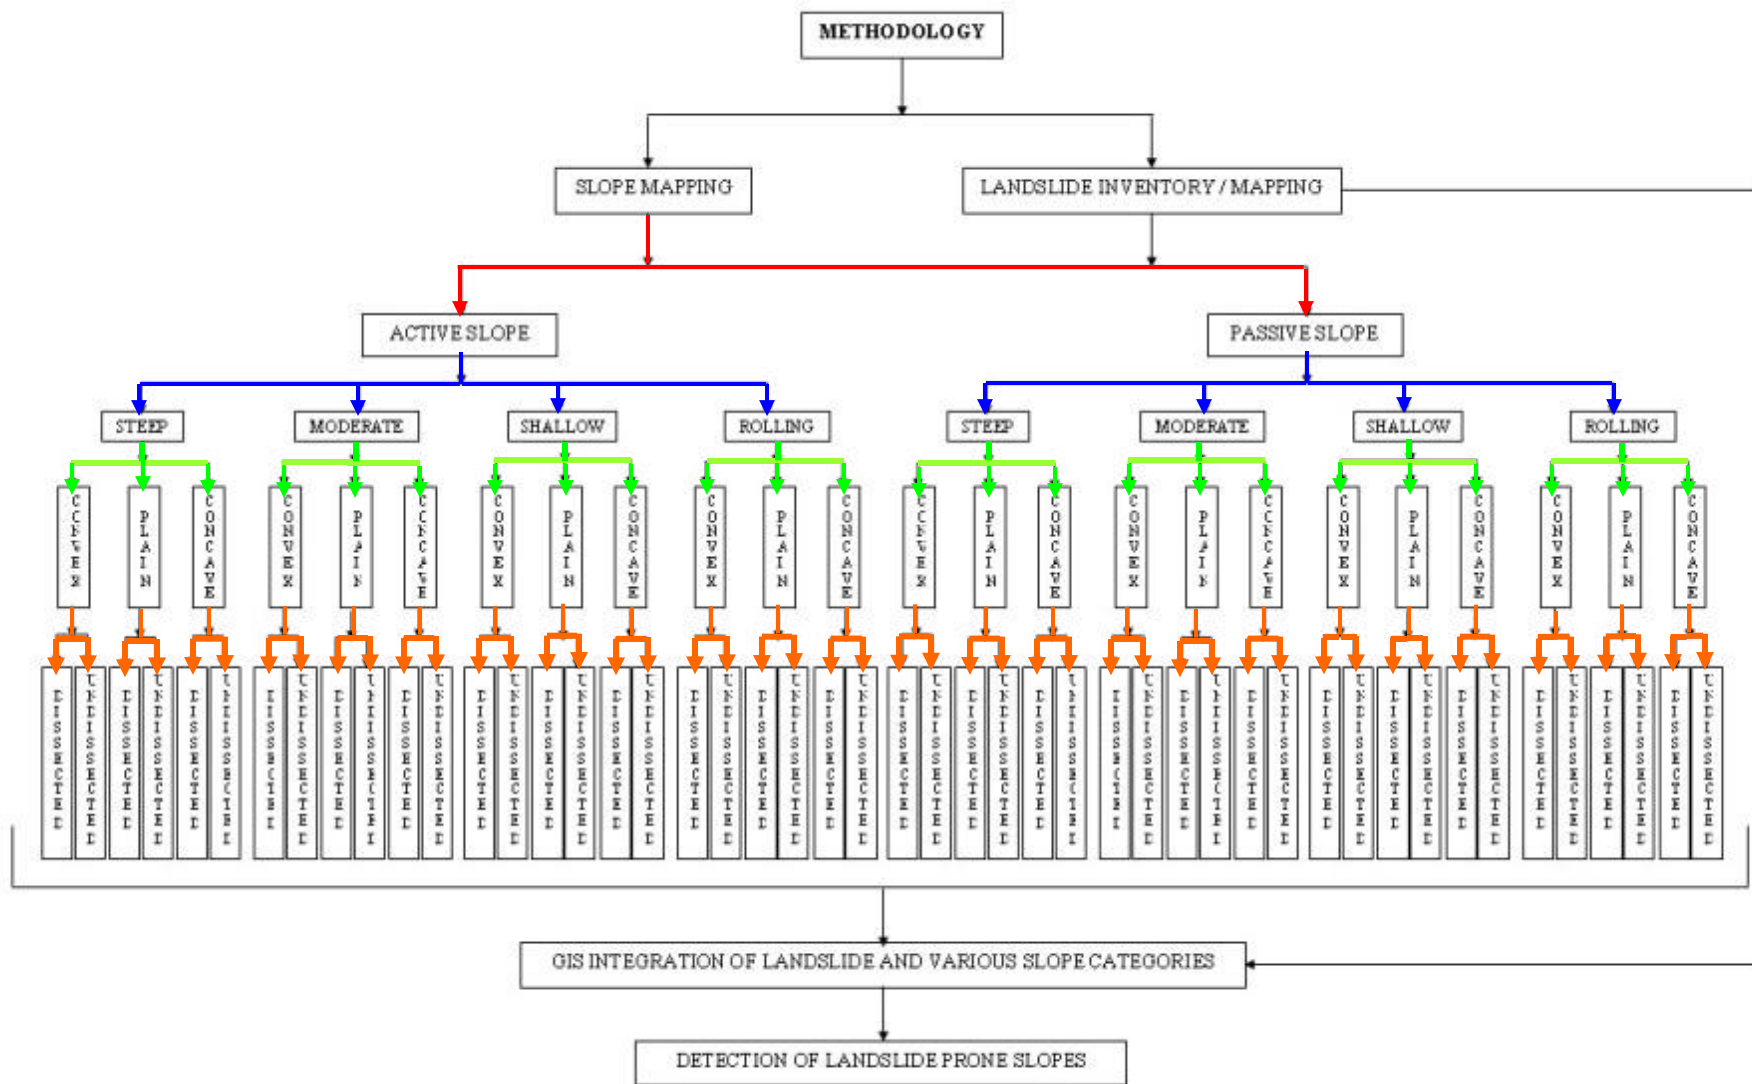


PROJECT " NILA "

KEY MAP OF THE TEST SITE

0 2 4 8 km

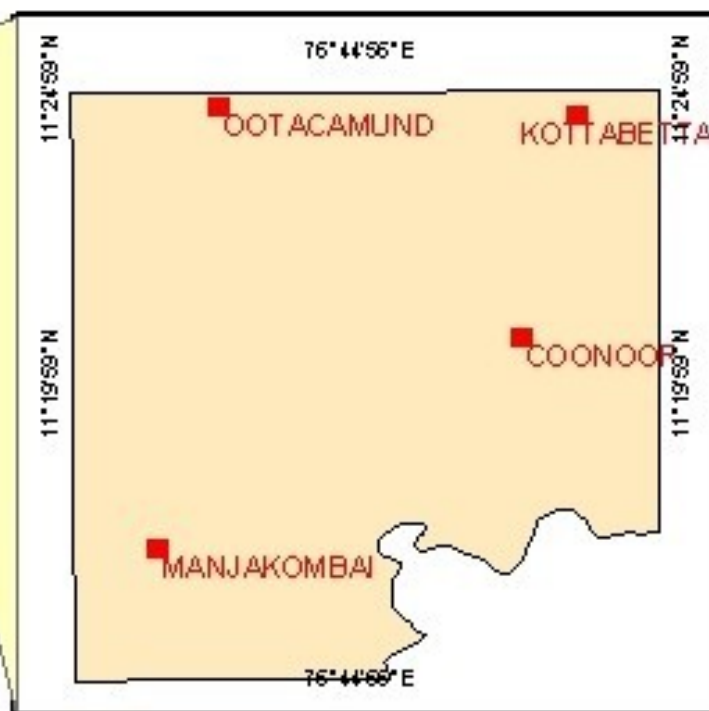

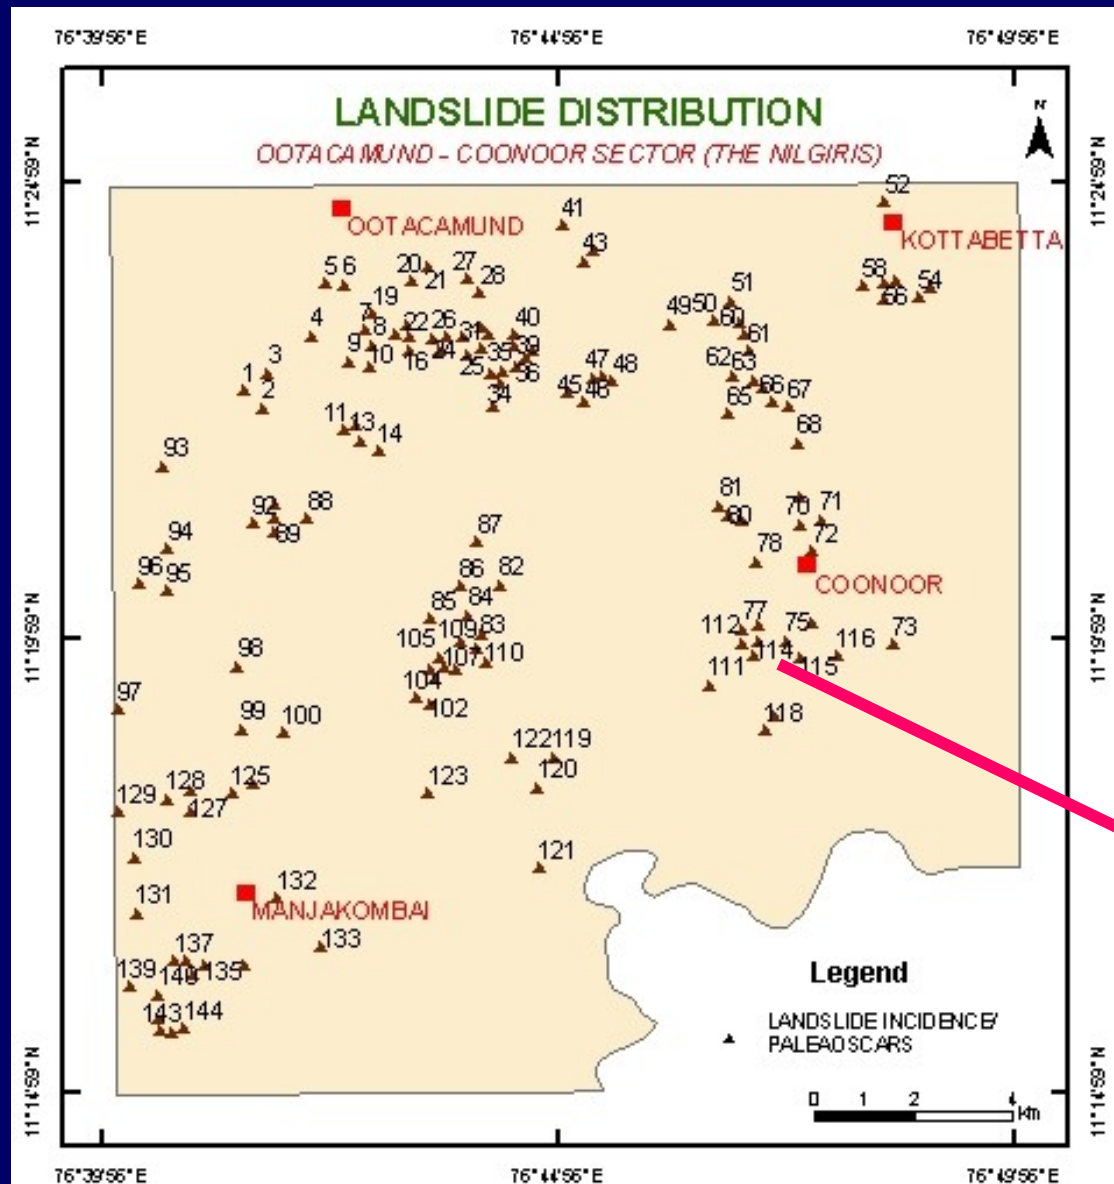

**144
LANDSLIDES**


ACTIVE – PASSIVE SLOPES

ACTIVE SLOPE



PASSIVE SLOPE


(VEGETATIVE COVER)

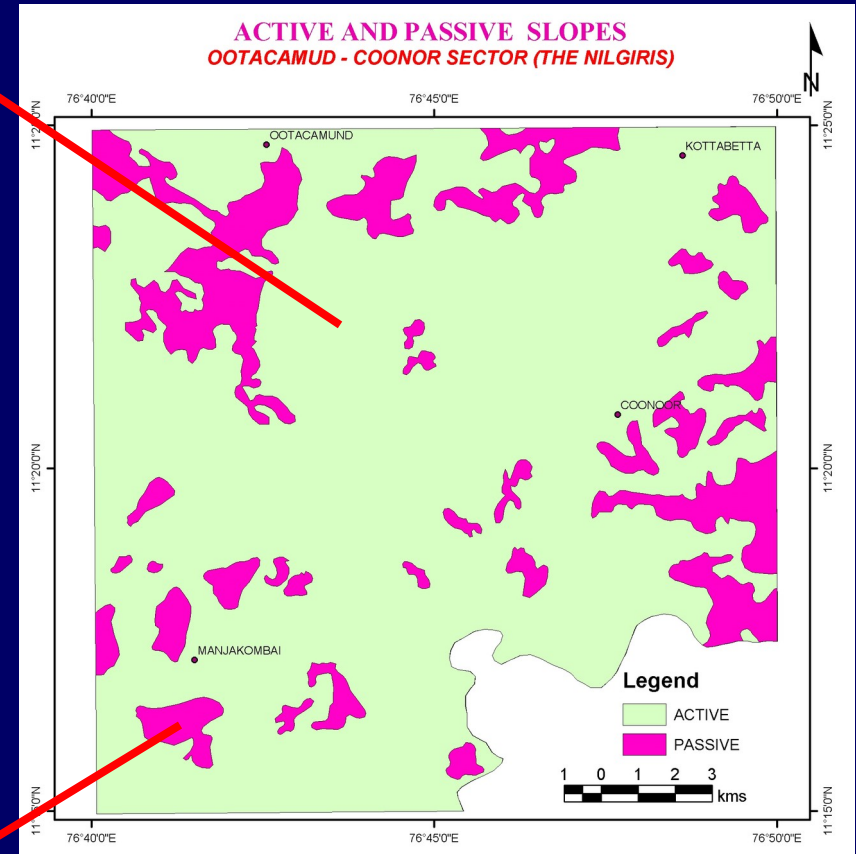

STEEP – MODERATE – SHALLOW - ROLLING SLOPES

STEEP SLOPE

MODERATE SLOPE

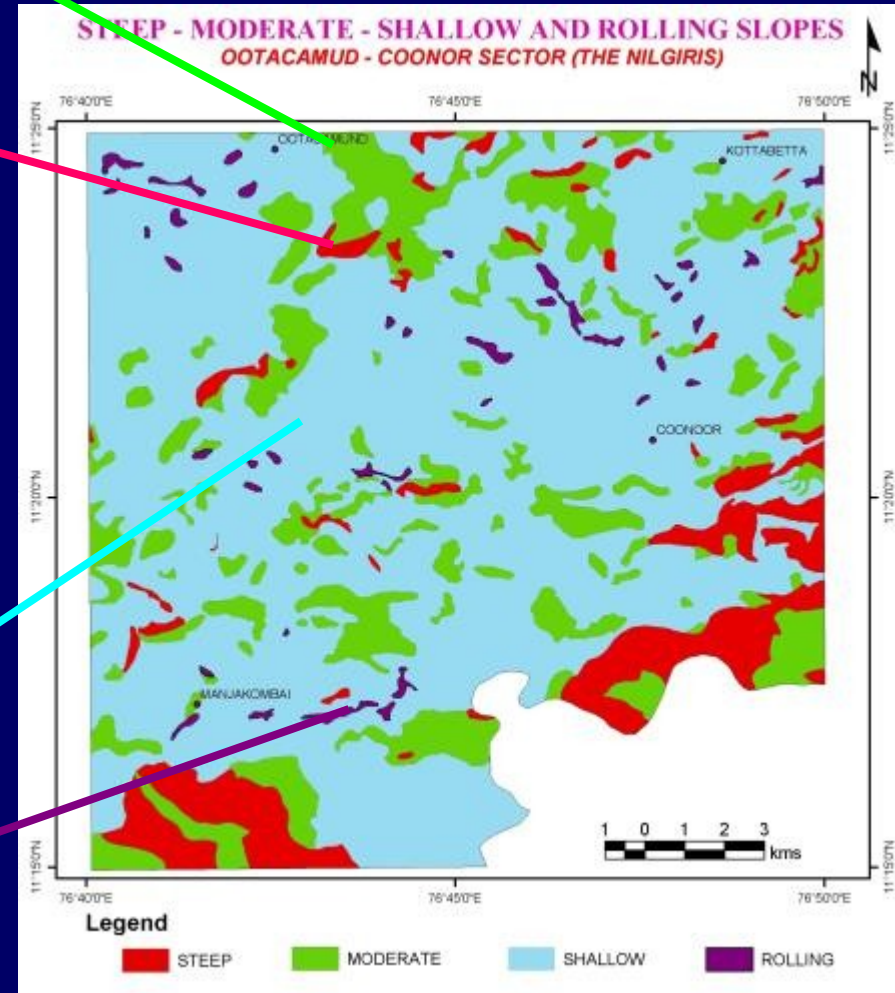


SHALLOW SLOPE

ROLLING SLOPE


CONVEX – PLAIN - CONCAVE SLOPES

CONCAVE SLOPE


CONVEX SLOPE

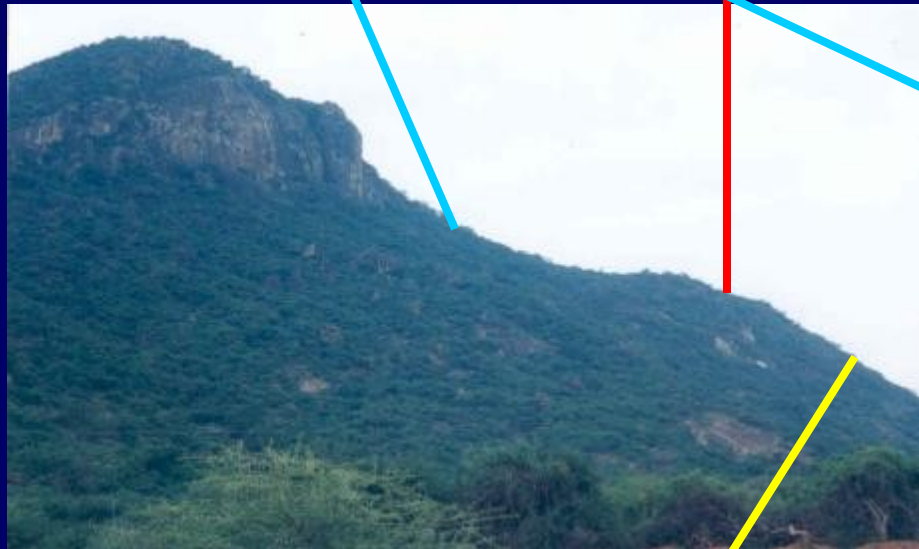

PLAIN

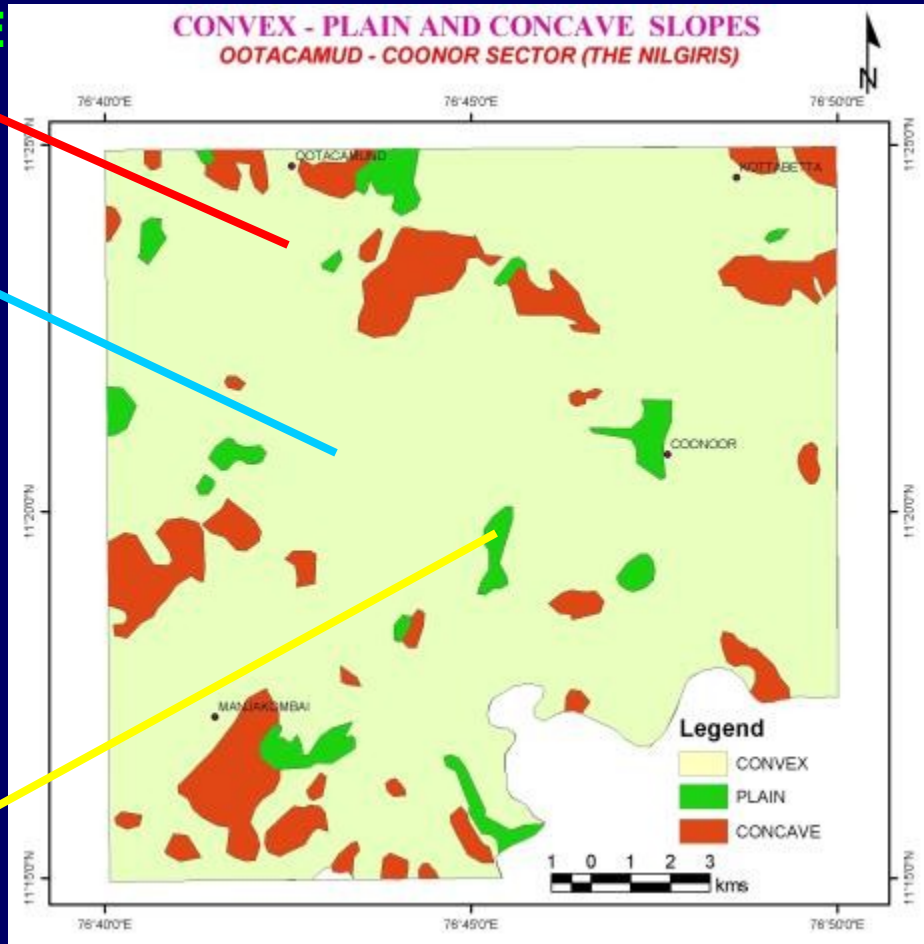

DISSECTED - UNDISSECTED SLOPES

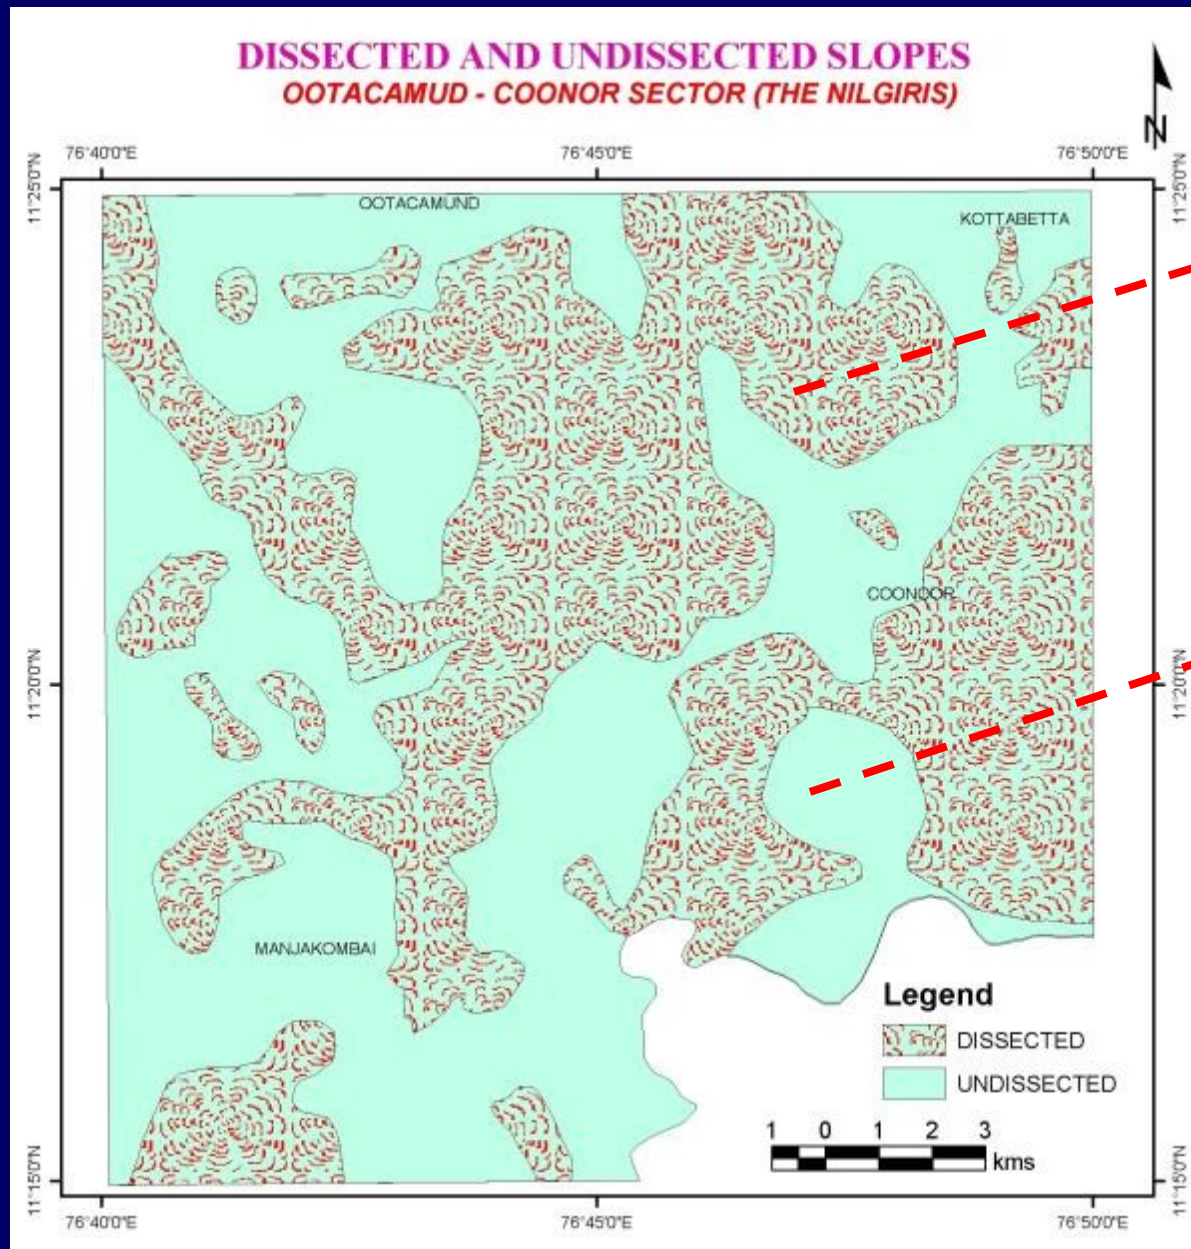

DISSECTED SLOPE

UNDISSECTED SLOPE

GIS INTEGRATION (LEVEL 1)


LAYER 1 (2 CLASSES)
(ACTIVE & PASSIVE
SLOPES)

+

LAYER 2 (4 CLASSES)
(STEEP MODERATE,
SHALLOW & ROLLING
SLOPES)

OUTPUT
(8 CLASSES)

GIS INTEGRATION (LEVEL 1) OOTACAMUD - COONOR SECTOR (THE NILGIRIS)

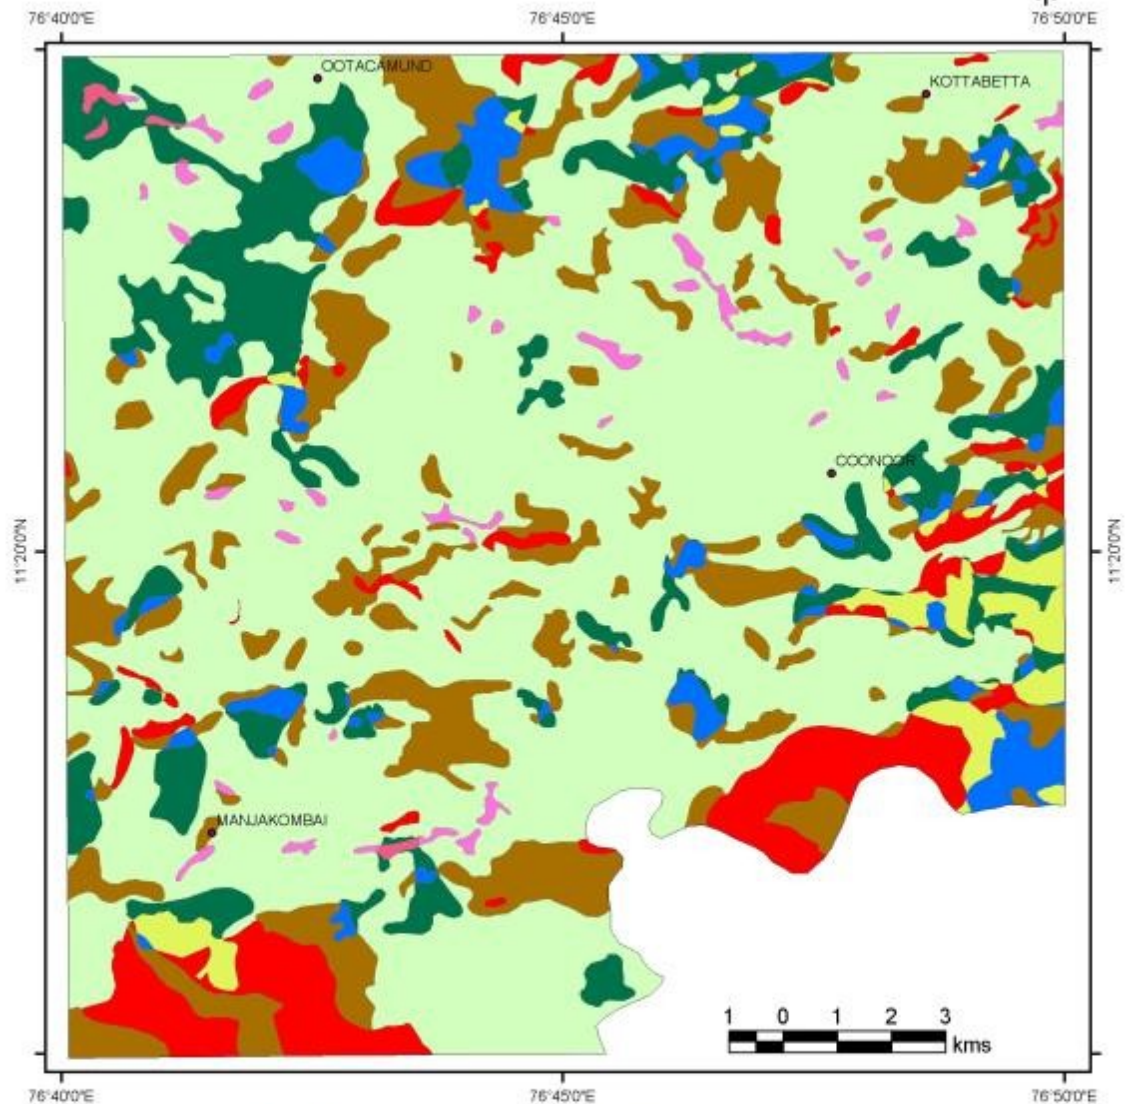

Legend

ACTIVE + STEEP	PASSIVE + STEEP
ACTIVE + MODERATE	PASSIVE + MODERATE
ACTIVE + SHALLOW	PASSIVE + SHALLOW
ACTIVE + ROLLING	PASSIVE + ROLLING

GIS INTEGRATION (LEVEL II)

OUTPUT OF GIS
INTEGRATION
LEVEL I

(8 CLASSES)


+

LAYER 3


(3 CLASSES)

OUTPUTS

(24 CLASSES)

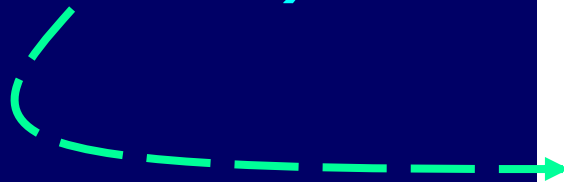

GIS INTEGRATION (LEVEL II) OOTACAMUD - COONOR SECTOR (THE NILGIRIS)

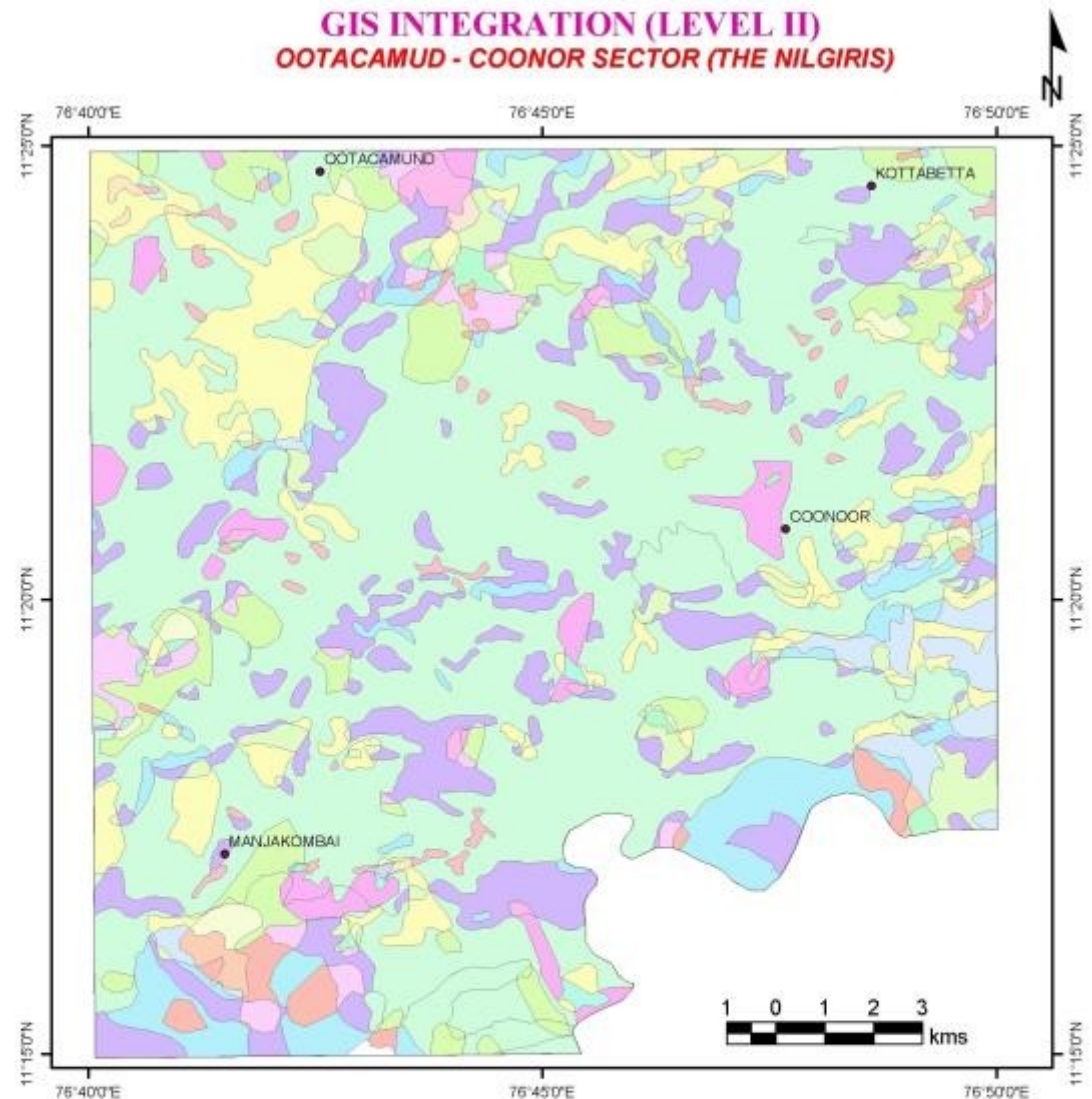

Legend

ACTIVE + STEEP + CONVEX	ACTIVE + SHALLOW + CONCAVE	PASSIVE + MODERATE + PLAIN
ACTIVE + STEEP + PLAIN	ACTIVE + ROLLING + CONVEX	PASSIVE + MODERATE + CONCAVE
ACTIVE + STEEP + CONCAVE	ACTIVE + ROLLING + PLAIN	PASSIVE + SHALLOW + CONVEX
ACTIVE + MODERATE + CONVEX	ACTIVE + ROLLING + CONCAVE	PASSIVE + SHALLOW + PLAIN
ACTIVE + MODERATE + PLAIN	PASSIVE + STEEP + CONVEX	PASSIVE + SHALLOW + CONCAVE
ACTIVE + MODERATE + CONCAVE	PASSIVE + STEEP + PLAIN	PASSIVE + ROLLING + CONVEX
ACTIVE + SHALLOW + CONVEX	PASSIVE + STEEP + CONCAVE	PASSIVE + ROLLING + PLAIN
ACTIVE + SHALLOW + PLAIN	PASSIVE + MODERATE + CONVEX	PASSIVE + ROLLING + CONCAVE


GIS INTEGRATION (LEVEL III)

OUTPUT OF GIS
INTEGRATION
LEVEL II
(24 CLASSES)

+

LAYER 4
(2 CLASSES)

OUTPUT
(46 CLASSES)

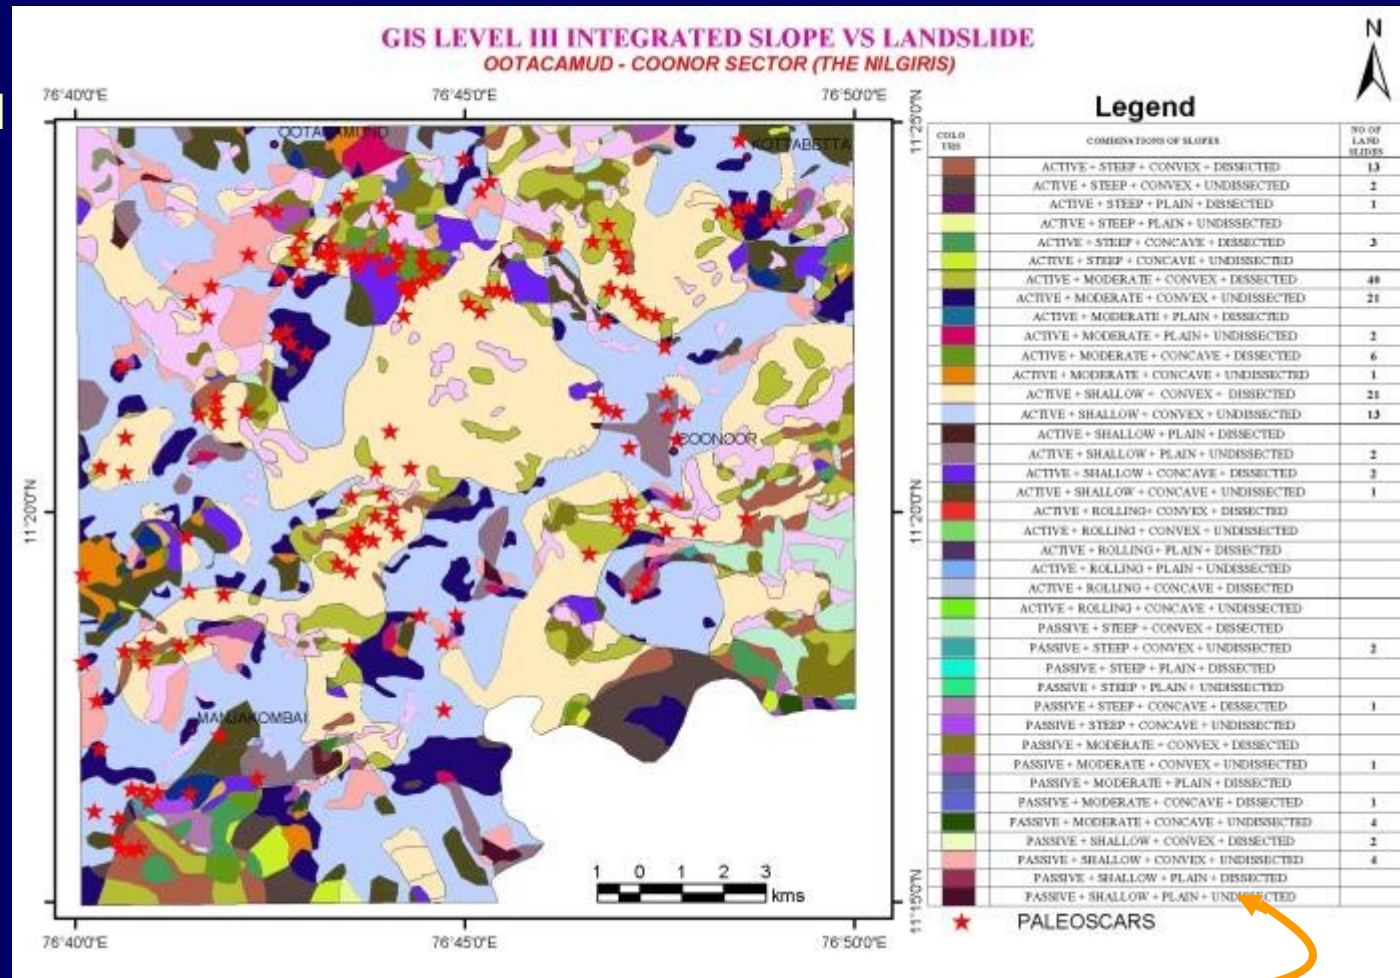

MOST VULNERABLE SLOPES
ACTIVE + MODERATE + CONVEX + DISSECTED--- 40
ACTIVE + MODERATE + CONVEX + UNDISSECTED---- 21
ACTIVE + SHALLOW + CONVEX + DISSECTED--- 21
ACTIVE + SHALLOW + CONVEX + DISSECTED---- 13
ACTIVE + STEEP + CONVEX +DISSECTED---- 13

CLASS NO	COMBINATIONS OF SLOPES	NO OF LAND SLIDES
MOST VULNERABLE SLOPES		
1	ACTIVE + MODERATE + CONVEX + DISSECTED	40
2	ACTIVE + MODERATE + CONVEX + UNDISSECTED	21
3	ACTIVE + SHALLOW + CONVEX + DISSECTED	21
4	ACTIVE + STEEP + CONVEX + DISSECTED	13
5	ACTIVE + SHALLOW + CONVEX + UNDISSECTED	13
MODERATE VULNERABLE SLOPES		
6	ACTIVE + MODERATE + CONCAVE + DISSECTED	6
7	PASSIVE + MODERATE + CONCAVE + UNDISSECTED	4
8	PASSIVE + SHALLOW + CONVEX + UNDISSECTED	4
9	ACTIVE + STEEP + CONCAVE + DISSECTED	3
10	ACTIVE + STEEP + CONVEX + UNDISSECTED	2
11	ACTIVE + MODERATE + PLAIN + UNDISSECTED	2
12	ACTIVE + SHALLOW + PLAIN + UNDISSECTED	2
13	ACTIVE + SHALLOW + CONCAVE + DISSECTED	2
14	PASSIVE + STEEP + CONVEX + UNDISSECTED	2
15	PASSIVE + SHALLOW + CONVEX + DISSECTED	2
16	ACTIVE + SHALLOW + CONCAVE + UNDISSECTED	1
17	ACTIVE + STEEP + PLAIN + DISSECTED	1
18	ACTIVE + MODERATE + CONCAVE + UNDISSECTED	1
19	PASSIVE + STEEP + CONCAVE + DISSECTED	1
20	PASSIVE + MODERATE + CONVEX + UNDISSECTED	1
21	PASSIVE + MODERATE + CONCAVE + DISSECTED	1
22	PASSIVE + SHALLOW + CONCAVE + UNDISSECTED	1

LEAST VULNERABLE SLOPES

23	ACTIVE + STEEP + PLAIN + UNDISSECTED	
24	ACTIVE + STEEP + CONCAVE + UNDISSECTED	
25	ACTIVE + MODERATE + PLAIN + DISSECTED	
26	ACTIVE + SHALLOW + PLAIN + DISSECTED	
27	ACTIVE + ROLLING + CONVEX + UNDISSECTED	
28	ACTIVE + ROLLING + CONVEX + DISSECTED	
29	ACTIVE + ROLLING + PLAIN + DISSECTED	
30	ACTIVE + ROLLING + PLAIN + UNDISSECTED	
31	ACTIVE + ROLLING + CONCAVE + DISSECTED	
32	ACTIVE + ROLLING + CONCAVE + UNDISSECTED	
33	PASSIVE + STEEP + CONVEX + DISSECTED	
34	PASSIVE + STEEP + PLAIN + DISSECTED	
35	PASSIVE + STEEP + PLAIN + UNDISSECTED	
36	PASSIVE + MODERATE + PLAIN + DISSECTED	
37	PASSIVE + MODERATE + PLAIN + UNDISSECTED	
38	PASSIVE + STEEP + CONCAVE + UNDISSECTED	
39	PASSIVE + MODERATE + CONVEX + DISSECTED	
40	PASSIVE + SHALLOW + PLAIN + DISSECTED	
41	PASSIVE + SHALLOW + PLAIN + UNDISSECTED	
42	PASSIVE + SHALLOW + CONCAVE + DISSECTED	
43	PASSIVE + SHALLOW + CONVEX + DISSECTED	
44	PASSIVE + ROLLING + CONVEX + UNDISSECTED	
45	PASSIVE + ROLLING + PLAIN + DISSECTED	
46	PASSIVE + ROLLING + CONCAVE + DISSECTED	

MOST VULNERABLE SLOPE COMBINATIONS

(5 CLASSES)


**ACTIVE +
STEEP +
CONVEX
+DISSECTED**

**ACTIVE +
SHALLOW +
CONVEX +
UNDISSECTED**


**ACTIVE +
MODERATE +
CONVEX +
DISSECTED**

**ACTIVE +
SHALLOW +
CONVEX +
DISSECTED**

**ACTIVE + MODERATE + CONVEX +
UNDISSECTED**

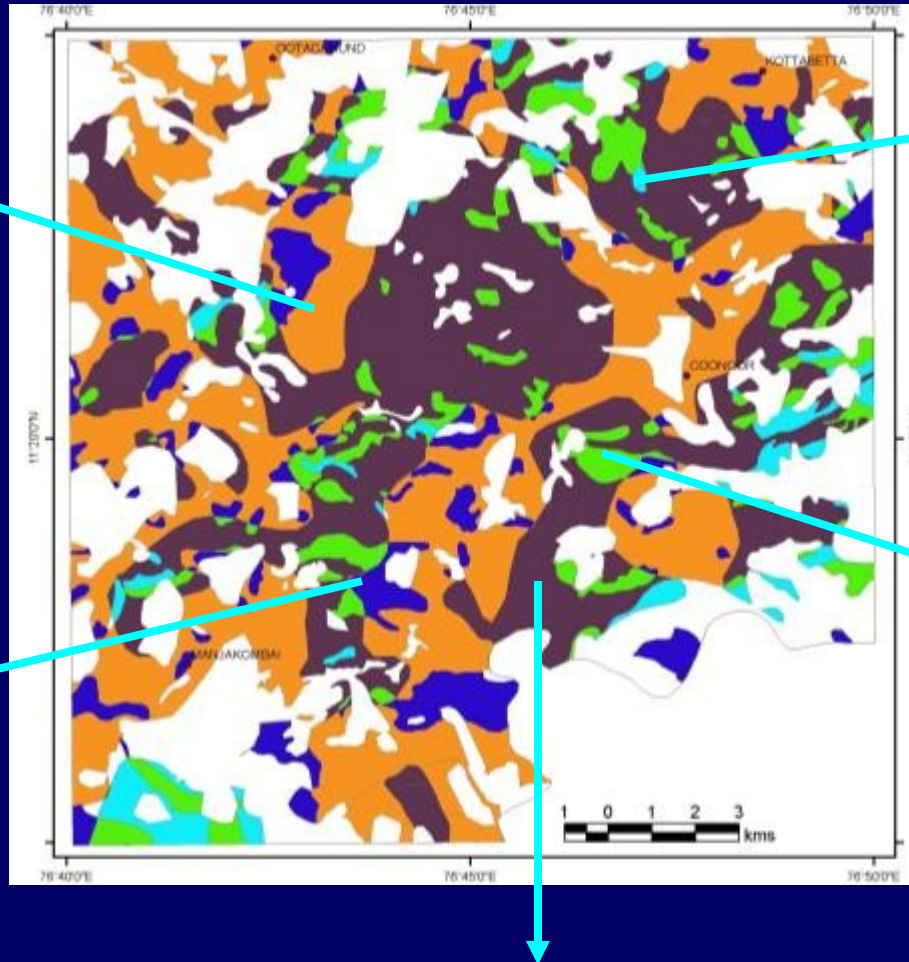

MODERATELY VULNERABLE SLOPES FOR LANDSLIDES OOTACAMUD - COONOR SECTOR (THE NILGIRIS)

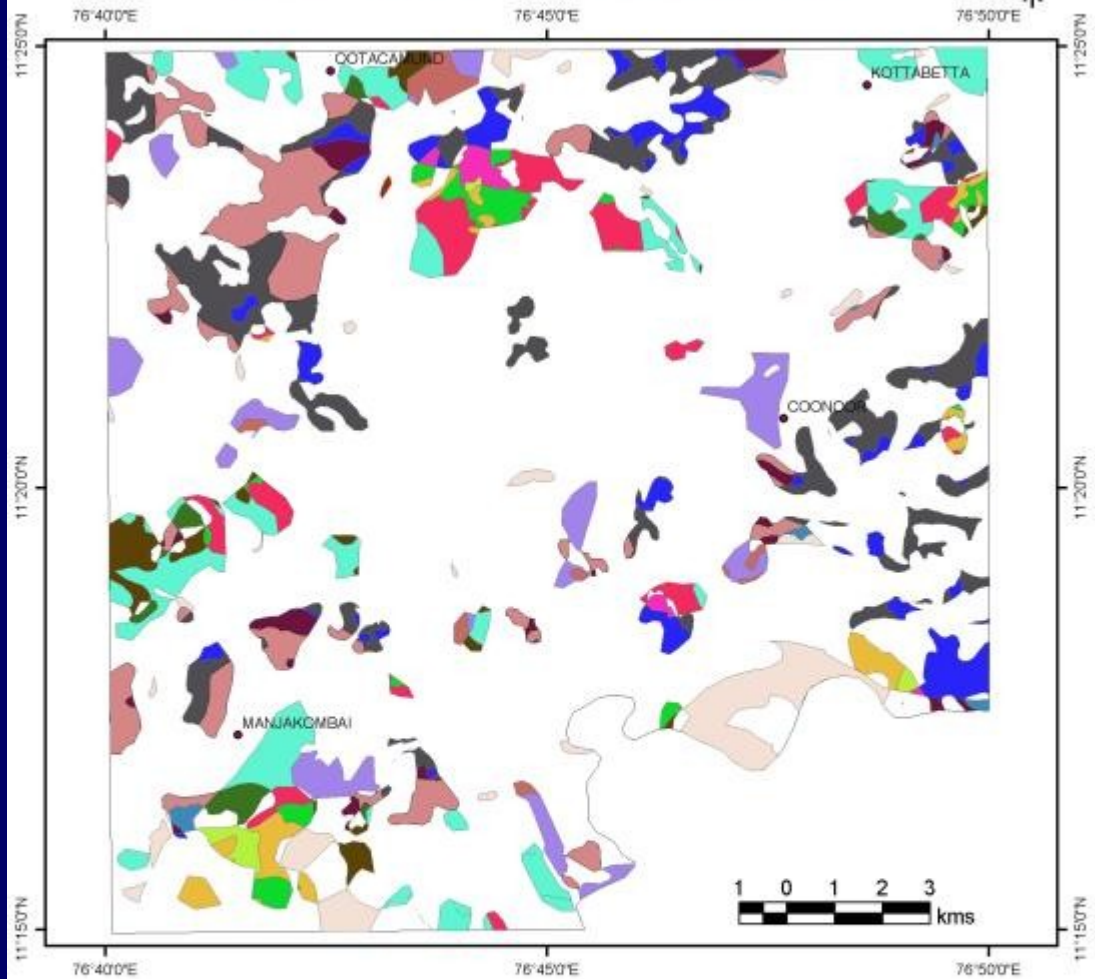

Legend

ACTIVE+STEEP+CONVEX+UNDISSECTED	ACTIVE+SHALLOW+CONCAVE+UNDISSECTED
ACTIVE+STEEP+PLAIN+DISSECTED	PASSIVE+MODERATE+CONCAVE+DISSECTED
ACTIVE+STEEP+CONCAVE+DISSECTED	PASSIVE+MODERATE+CONVEX+DISSECTED
ACTIVE+MODERATE+CONCAVE+DISSECTED	PASSIVE+MODERATE+CONVEX+UNDISSECTED
ACTIVE+MODERATE+PLAIN+UNDISSECTED	PASSIVE+SHALLOW+CONCAVE+UNDISSECTED
ACTIVE+MODERATE+CONCAVE+UNDISSECTED	PASSIVE+SHALLOW+CONVEX+DISSECTED
ACTIVE+SHALLOW+PLAIN+UNDISSECTED	PASSIVE+SHALLOW+CONVEX+UNDISSECTED
ACTIVE+SHALLOW+CONCAVE+DISSECTED	PASSIVE+STEEP+CONCAVE+DISSECTED
	PASSIVE+STEEP+CONVEX+UNDISSECTED

**MODERATE
VULNERABLE SLOPE
COMBINATIONS
(17 CLASSES)**

REMEDIAL MEASURES

Active slopes	Intensive Afforestation
Moderate and Shallow slopes	benching to steeping the slopes
Convex slope	slope flattening and convert them into plain slope or garland drainage in the upslope of the convex slopes

INFORMATION VALUE METHOD

INFORMATION VALUE BASED LVZ MAPPING - METHODOLOGY

Lithology

Lineament Frequency

Lineament Density

Lin. Intersection Density

Azimuth Rel. Ridge & Joint

Angle Rel. Slope & Joint

Dip amt. of the Joint

Slope

Geomorphology

Landuse / Landcover

Regolith

Drainage Density

Terrain Parameter Map


Landslide Incidence Map

CROSSING

Calculation of
Information Value

Integration of Thematic
Layers

Landslide vulnerability
zonation map

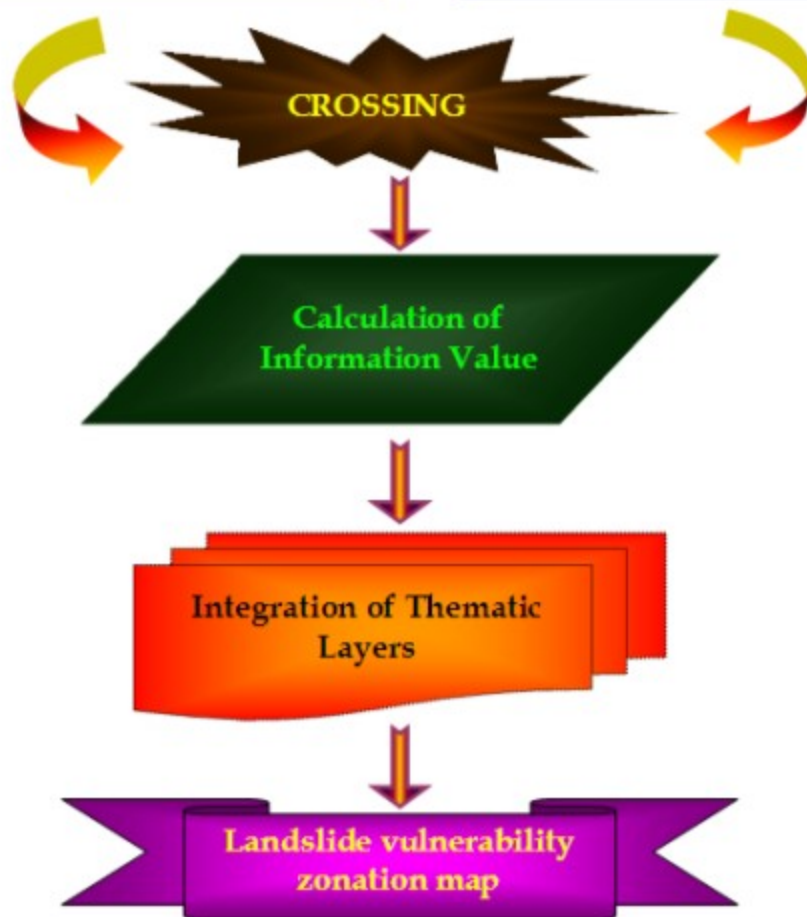

$$\text{Information value} = \log (S_i/N_i) / (S/N)$$

Where,

S_i - Number of Landslides pixels in particular variable


N_i - Total number of pixels in the said variable

S - Total landslides pixels in the study area

N - Total number of pixels of the study area

Hypothetic Example

Terrain Parameter Map

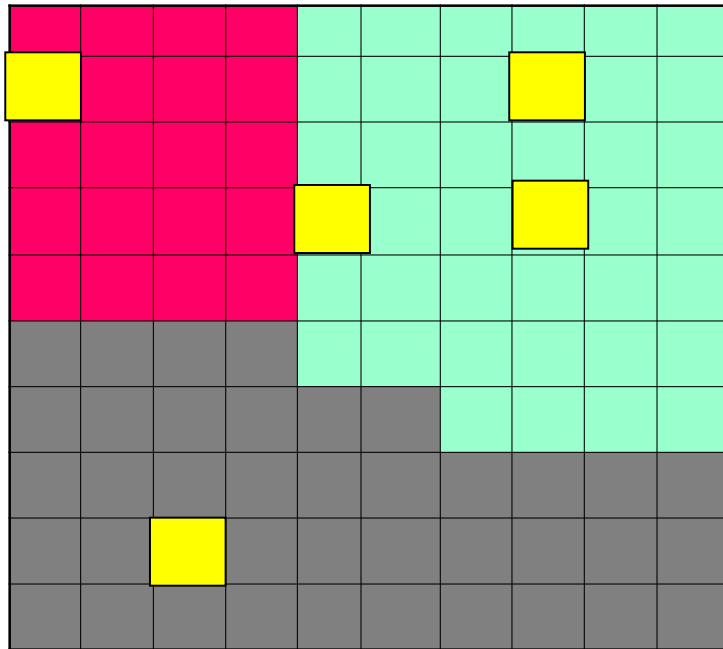

 **Class A**  **Class B**  **Class C**


40

20

40

Total Pixel in the Study Area = 100 pixels

Landslide Incidence map

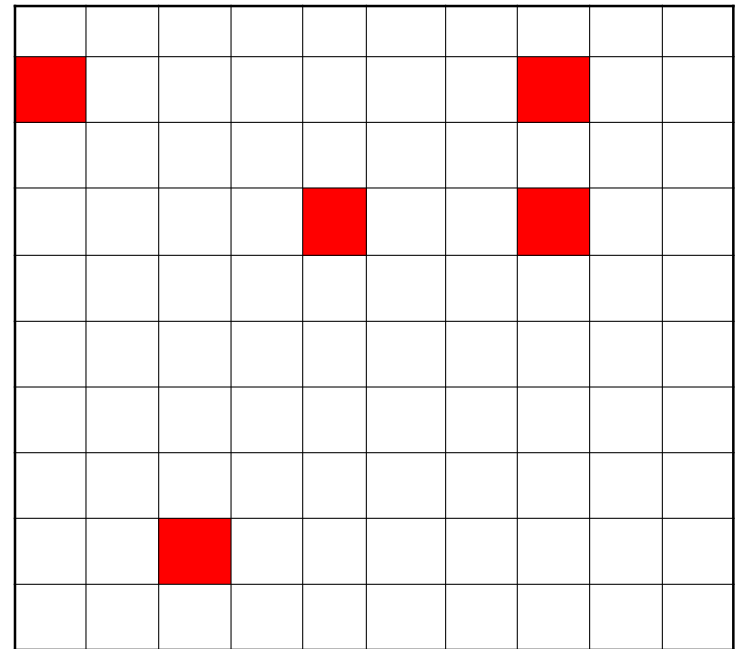


**Total Landslide
Incidence pixel in the
study area**

5

Hypothetic Example

Terrain Parameter Map

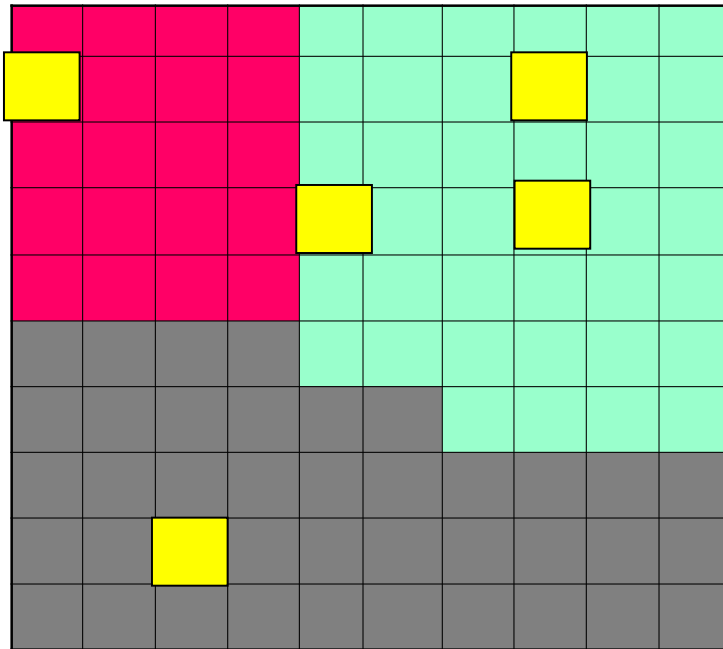

Class A
 Class B
 Class C

40

20

40

Total Pixel in the Study Area = **100** pixels

$$\text{Information value} = \log \left(\frac{(S_i/N_i)}{(S/N)} \right)$$

Info Value for Class A

S_i - number of Landslides pixels in the ClassA
3

N_i - Total number of pixels in the ClassA
40

S - Total Landslide pixels in Study area
5

N - Total number of pixels of the Study area
100

$$\log \left(\frac{(S_i/N_i)}{(S/N)} \right) = \text{Log} \left(\frac{(3/40)}{(5/100)} \right)$$

$$= \text{Log} (0.075 / 0.05)$$

$$= \text{Log} 1.5 = 0.17609125$$

**Total Landslide Incidence
pixel in the study area**

5

Calculation of Information value method for Highly Weathered Charnockite

Information value of Highly Weathered Charnockite = $\log (S_i / N_i) / (S / N)$

Where,

(i) S_i = Number of Landslide pixel present in Highly Weathered Charnockite (100)

(ii) N_i = Total number of pixels covered by Highly Weathered Charnockite (217983)

(iii) S = Total no landslide pixels in the map or study area (144)

(iv) N = Total number of pixel in the map or the study area (552456)

These values were substituted in the formula and the information value of 0.2456 was arrived for Highly Weathered Charnockite i.e.,
Information value for Highly Weathered Charnockite

$$= \log (100 / 217983) / (144 / 552456)$$

$$= \log (1.760) = \underline{0.2456}$$

Weightages assigned as per Information Value Method for Lithology (For Example)

Litho_Class	Si	Ni	S	N	(Si/Ni) / (S/N)	<u>Informa</u> <u>tion</u> <u>Value</u>
Highly Weathered Charnockite	100	217983	144	552456	1.760	0.245
Moderately Weathered Charnockite	12	207817			0.222	-0.654
Poorly Weathered Charnockite	32	123084			0.997	-0.001

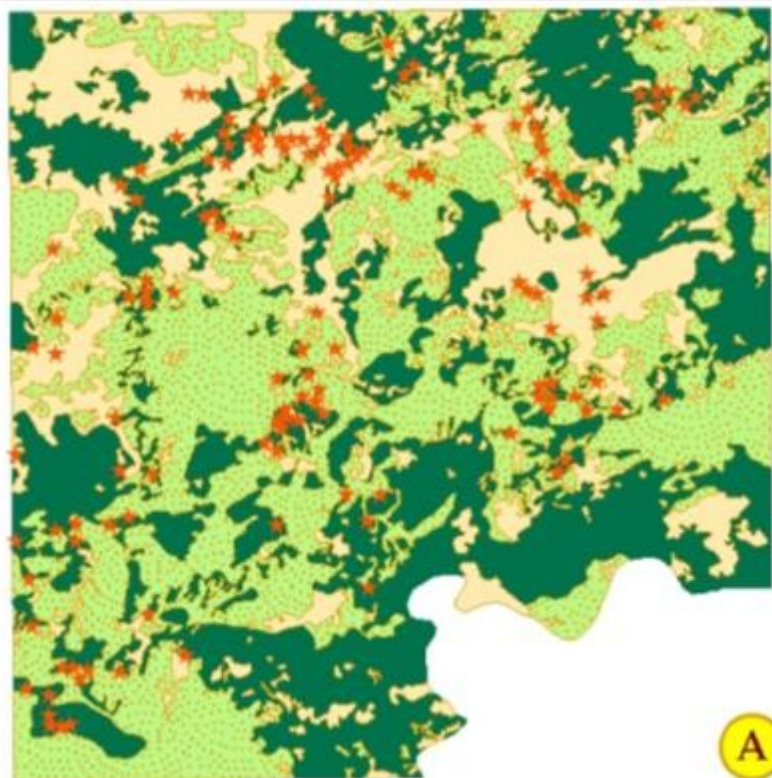


Fig.18 A. - Map showing the
Lithology map

- Highly Weathered Charnockite,
- Moderately Weathered Charnockite
- Poorly Weathered Charnockite and
- Landslides

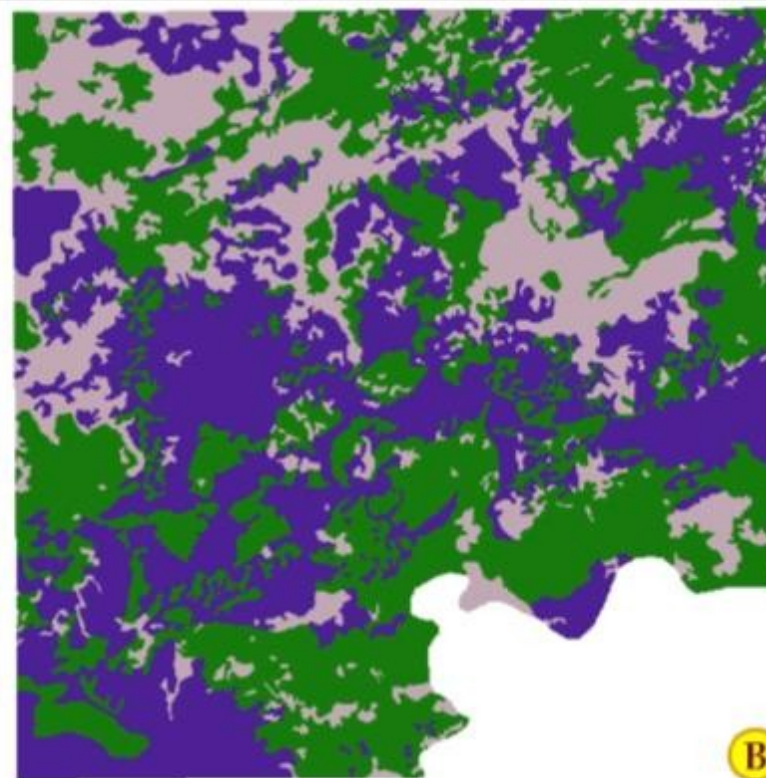


Fig. 18B. - Raster output of Lithology layer
showing lithology pixels with

- 0.65 Information Value
- 0.001 Information Value
- 0.245 Information Value

The same way information value (Weightages) are assigned for the following theme

Lithology, Lineament Frequency, Lineament Density, Lineament Intersection density, Slope, Geomorphology, Azimuths of Ridgeline vs Joints, Angular relation between dip and slope, Amount of Dip etc

By integrating all, the landslide hazard zones brought out

The finally accrued information values were normalized from 1 to 10 and classified them into 5 zones of Landslide vulnerabilities like Very High (> 8), High ($8 - 6$), Moderate ($6 - 4$), Low ($4 - 2$) and Very Low (< 2).



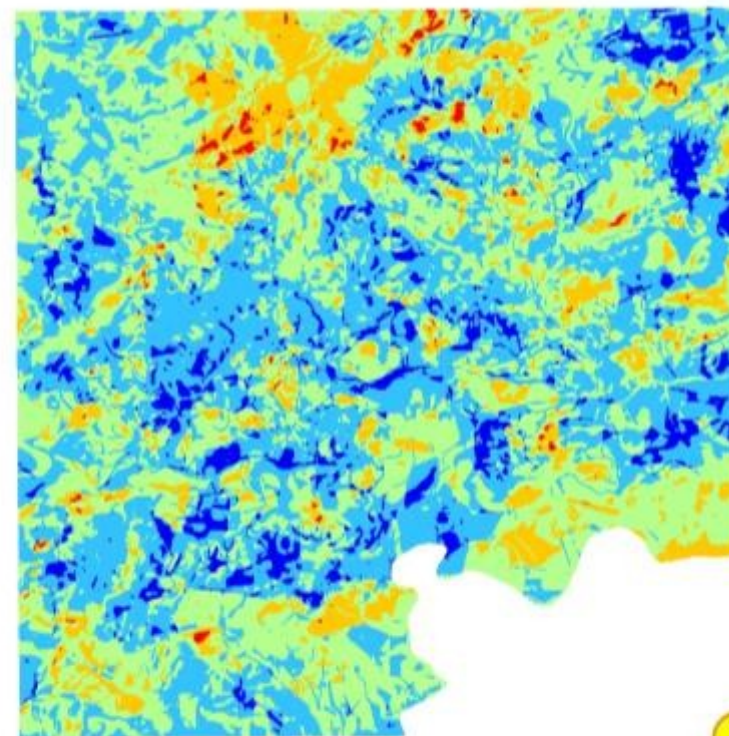


Fig. 22- Weight of Evidence Method Output(A) and LHZ(B)

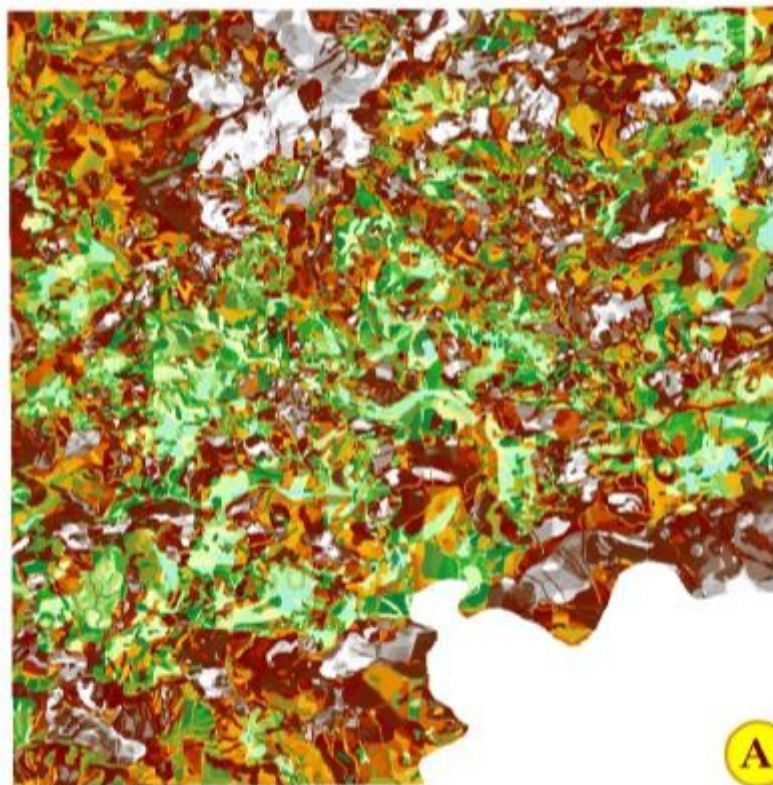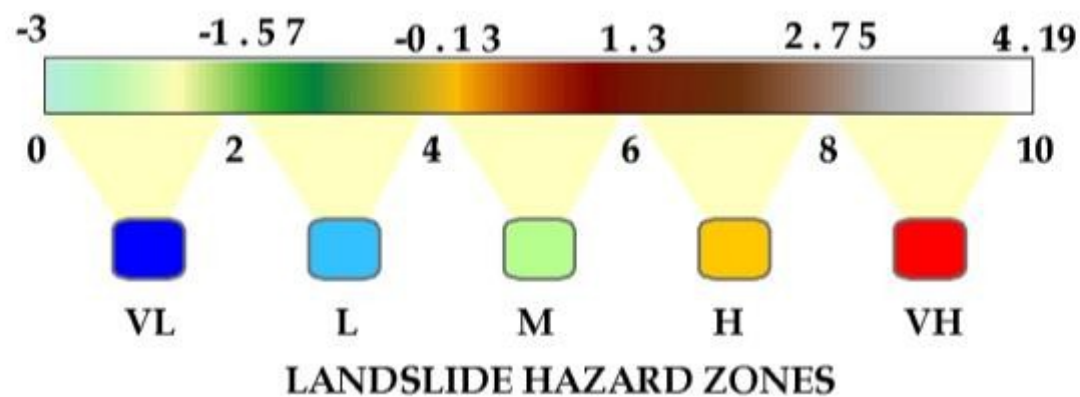

WEIGHTS OF EVIDENCE

[

]

WEIGHTS OF EVIDENCE

$$W_i^+ = \log_e \frac{\frac{Npix_1}{Npix_1 + Npix_2}}{\frac{Npix_3}{Npix_3 + Npix_4}}$$

$$W_i^- = \log_e \frac{\frac{Npix_2}{Npix_1 + Npix_2}}{\frac{Npix_4}{Npix_3 + Npix_4}}$$

Npix1 - Total number of Landslides pixels falling in (eg. highly weathered charnockite)


Npix2 - Total number of Landslides pixels not falling or falling outside highly weathered charnockite

Npix3 - Total number of highly weathered charnockite pixels free of Landslides or not having landslides

Npix4 - Total number of pixels not having Landslides and also not having highly weathered charnockite

Hypothetic Example

Terrain Parameter Map

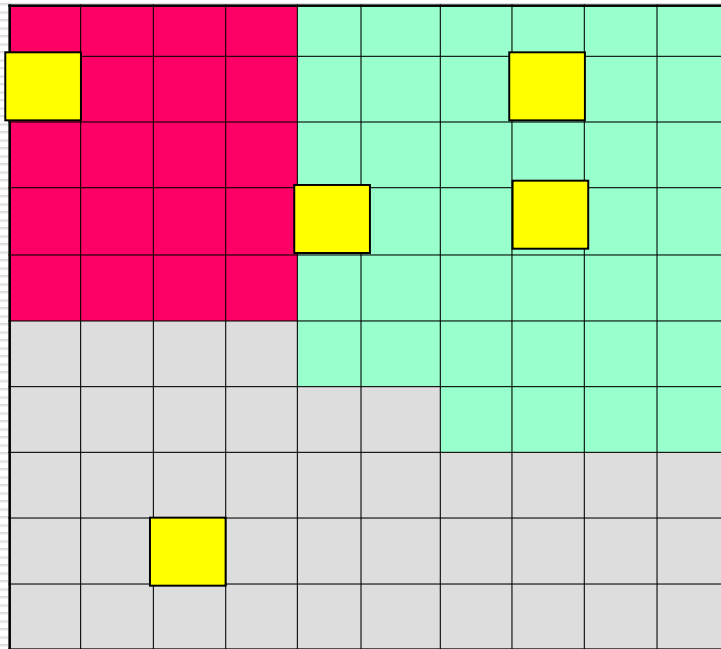

 **Class A**  **Class B**  **Class C**


40

20

40

Total Pixel in the Study Area = 100 pixels

Landslide Incidence map

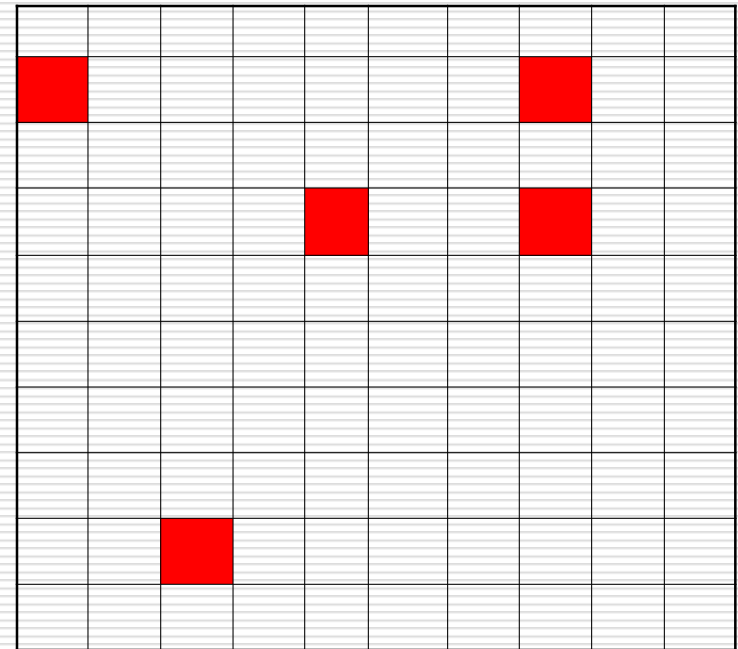


**Total Landslide
Incidence pixel in the
study area**

5

Hypothetic Example

Final WOE for Class-A

Terrain Parameter Map

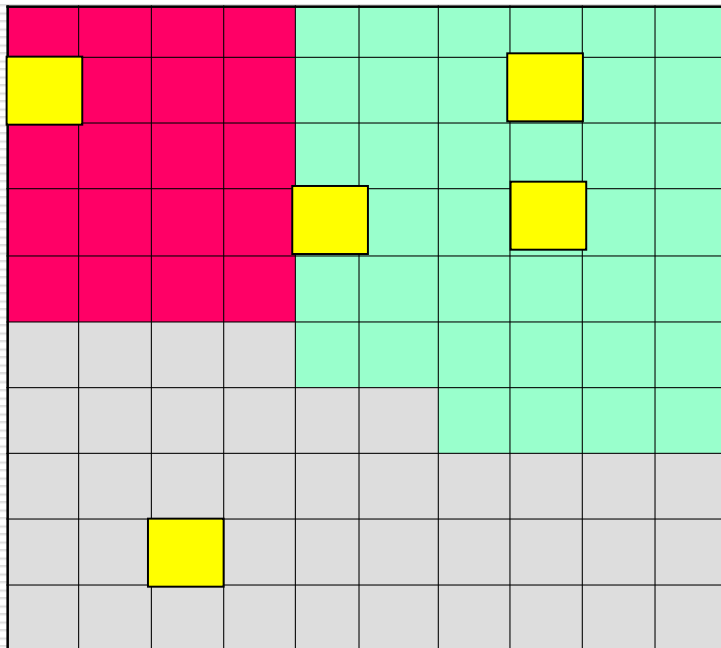

Class A
 Class B
 Class C

40

20

40



Total Landslide Incidence
pixel in the study area

5

Total Pixel in the Study Area = 100 pixels

N_{pix1} - Total number of Landslides pixels falling in Class A

3

N_{pix2} - Total number of Landslides pixels falling outside Class A

2

N_{pix3} - Total number of Class A pixels not having landslides

$$(40 - 3) = 37$$

N_{pix4} - Total number of pixels not having L.S. outside Class A

$$100 - 40 = 60, 60 - 2 = 58$$

$$W_i^{+ve} = \log_e [3/(3+2)] / [37/(37+58)]$$

$$W_i^{-ve} = \log_e [2/(2+3)] / [58/(58+37)]$$

Class-A $\rightarrow W_i^{+ve} = 0.1876 ; W_i^{-ve} = -0.1836$

Hypothetic Example

For Calculating Final WOE to
Class-A

Class-A $\rightarrow W_i^{+ve} = 0.1876 ; W_i^{-ve} = - 0.1836$

Class-B $\rightarrow W_i^{+ve} = 0 ; W_i^{-ve} = 0$

Class-C $\rightarrow W_i^{+ve} = - 0.3123 ; W_i^{-ve} = 0.1326$

$$\begin{aligned} &= W_i^{+ve} (A) + \left\{ W_i^{-ve} (A) + W_i^{-ve} (B) + W_i^{-ve} (C) \right\} W_i^{-ve} (A) \\ &= (0.1876) + \{ (- 0.1836) + (0) + (0.1326) \} - (- 0.1836) \\ &= (0.1876) + \{ (-0.1836) + (0) + (0.1326) \} + (0.1836) \\ &= (0.1876) - (0.0510) + (0.1836) \\ &= 0.3202 \end{aligned}$$

WOE for Class-A = 0.3202

Similarly,

WOE for Class-B = 0.0510

WOE for Class-C = - 0.4959

**Table 3-13 Weights of Evidence based based Landslide weightages of
Lithology**

S. No	Litho_Class	Npix1	Npix2	Npix3	Npix4	W +	W -	<u>Weights of Evidence</u>
1	Highly Weathered Charnockite	100	44	217883	334429	0.25	-0.300	<i>0.415</i>
2	Moderately Weathered Charnockite	12	132	207805	344507	-0.66	0.17	<i>-0.952</i>
3	Poorly Weathered Charnockite	32	112	123052	429260	-0.001	0	<i>-0.131</i>
			Sum of negative weightage =				-0.13	

Final weight of Evidence of highly weathered charnockite =

positive weight +(sum(negative weight)) - negative weight of highly weathered charnockite

$$= 0.25+ (-0.30 +0.17 +0)- (-0.30)$$

$$= 0.25 + (-0.13) - (-0.30)$$

$$= 0.415$$

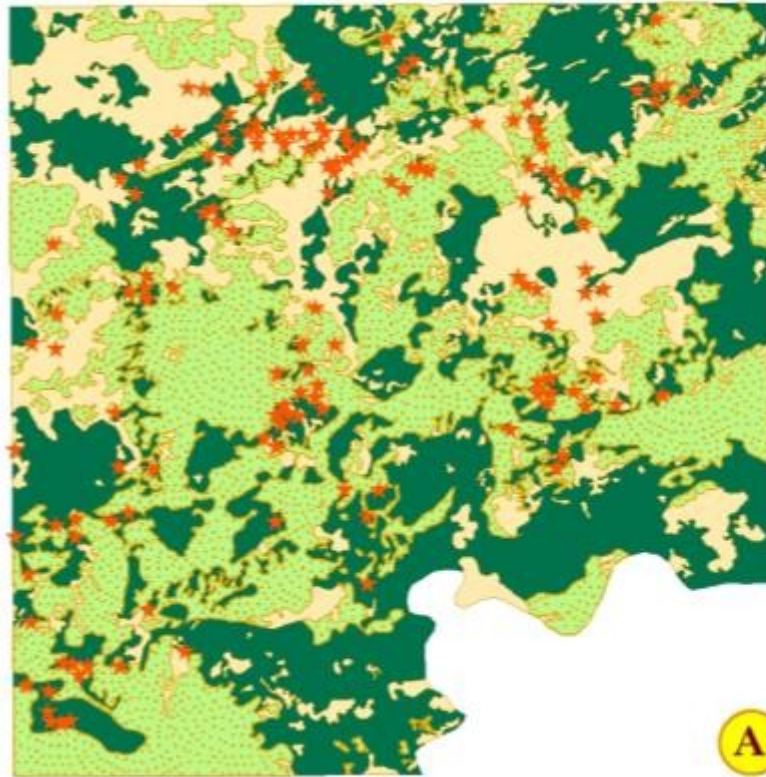


Fig.18 A. - Vector layer showing the
Lithology map

- Highly Weathered Charnockite,
- Moderately Weathered Charnockite
- Poorly Weathered Charnockite and
- Landslides superposed over them

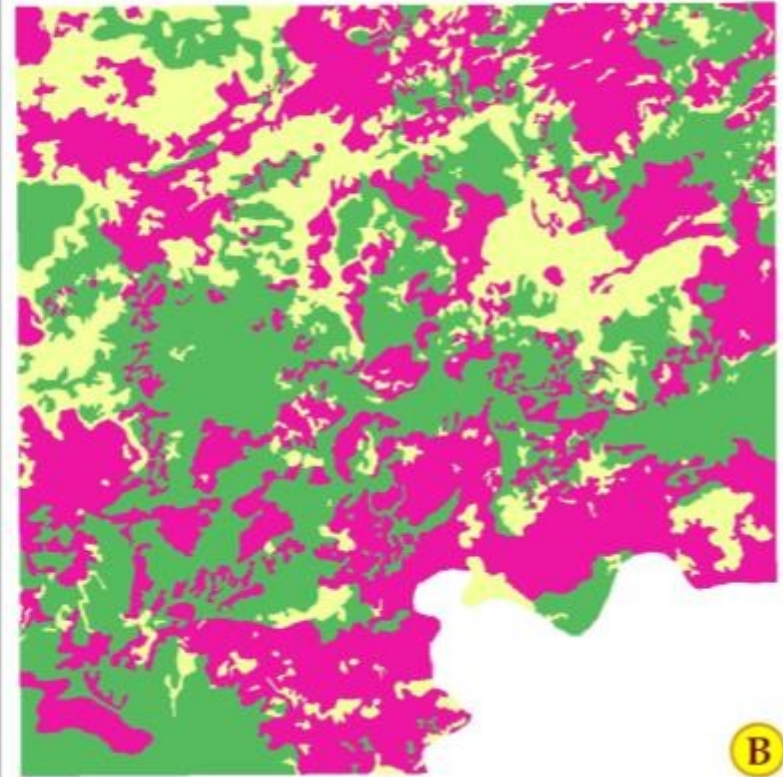


Fig. 18B. - Raster output of Lithology layer

- Lithology pixel with .415 WOE Value
- Lithology pixel with -0.95 WOE Value
- Lithology pixel with -0.13 WOE Value

- Work out weight of evidence for each polygon class of each of the 12 parameters
- Execute GIS add function
- Rescale the finally accrued value into 0 – 10.
- Classify them into 5 grades of landslide vulnerabilities
- Landslide Hazard Zonation, Very High, High, Moderate, Low and Very Low




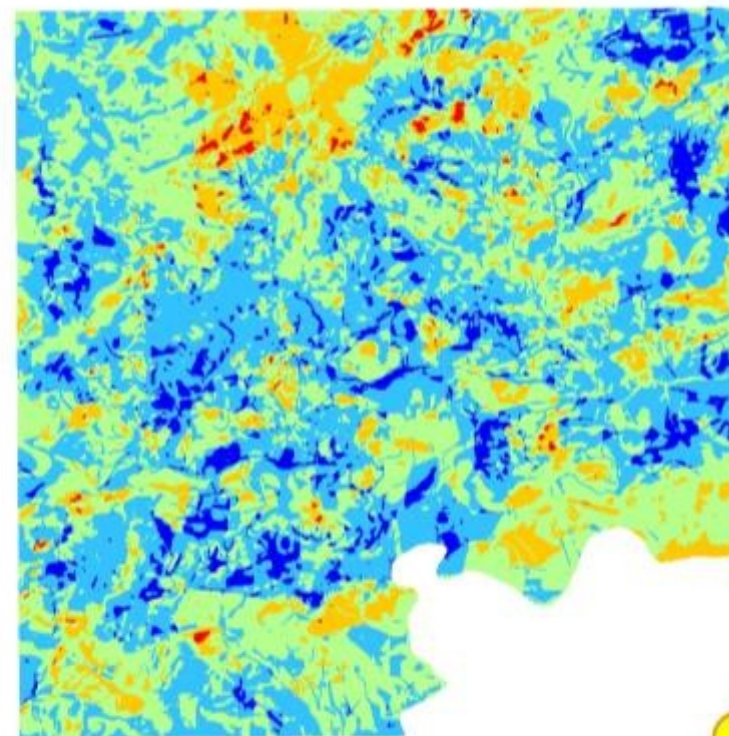


Fig. 22- Weight of Evidence Method Output(A) and LHZ(B)

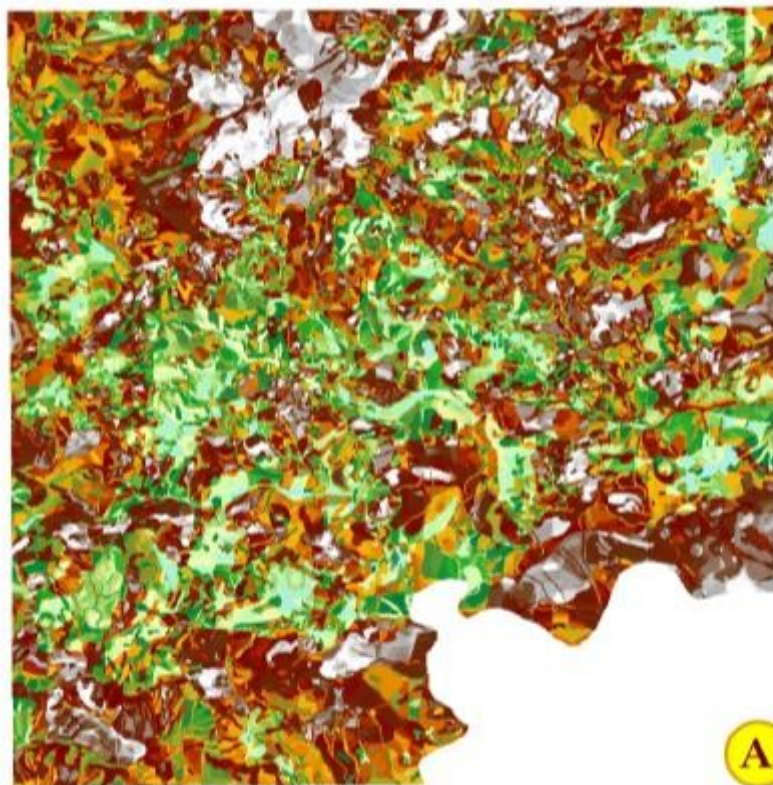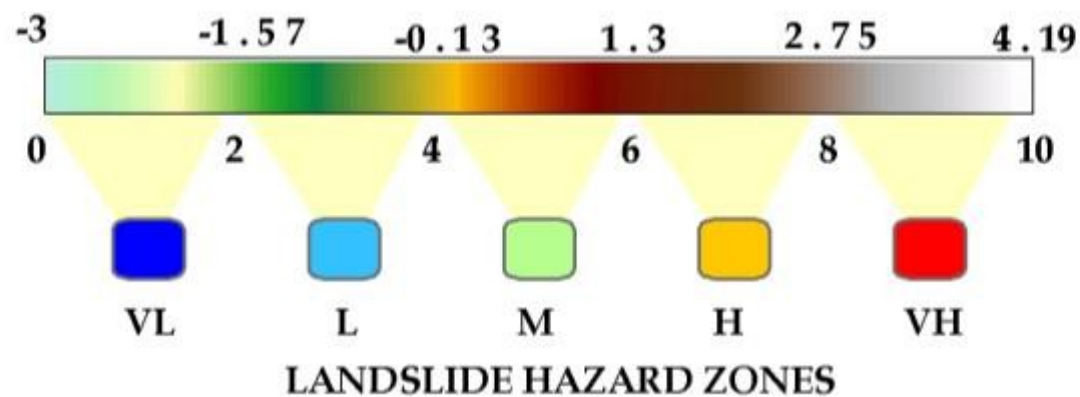

Index Overlay Method

INDEX OVERLAY METHOD BASED LVZ MAPPING - METHODOLOGY

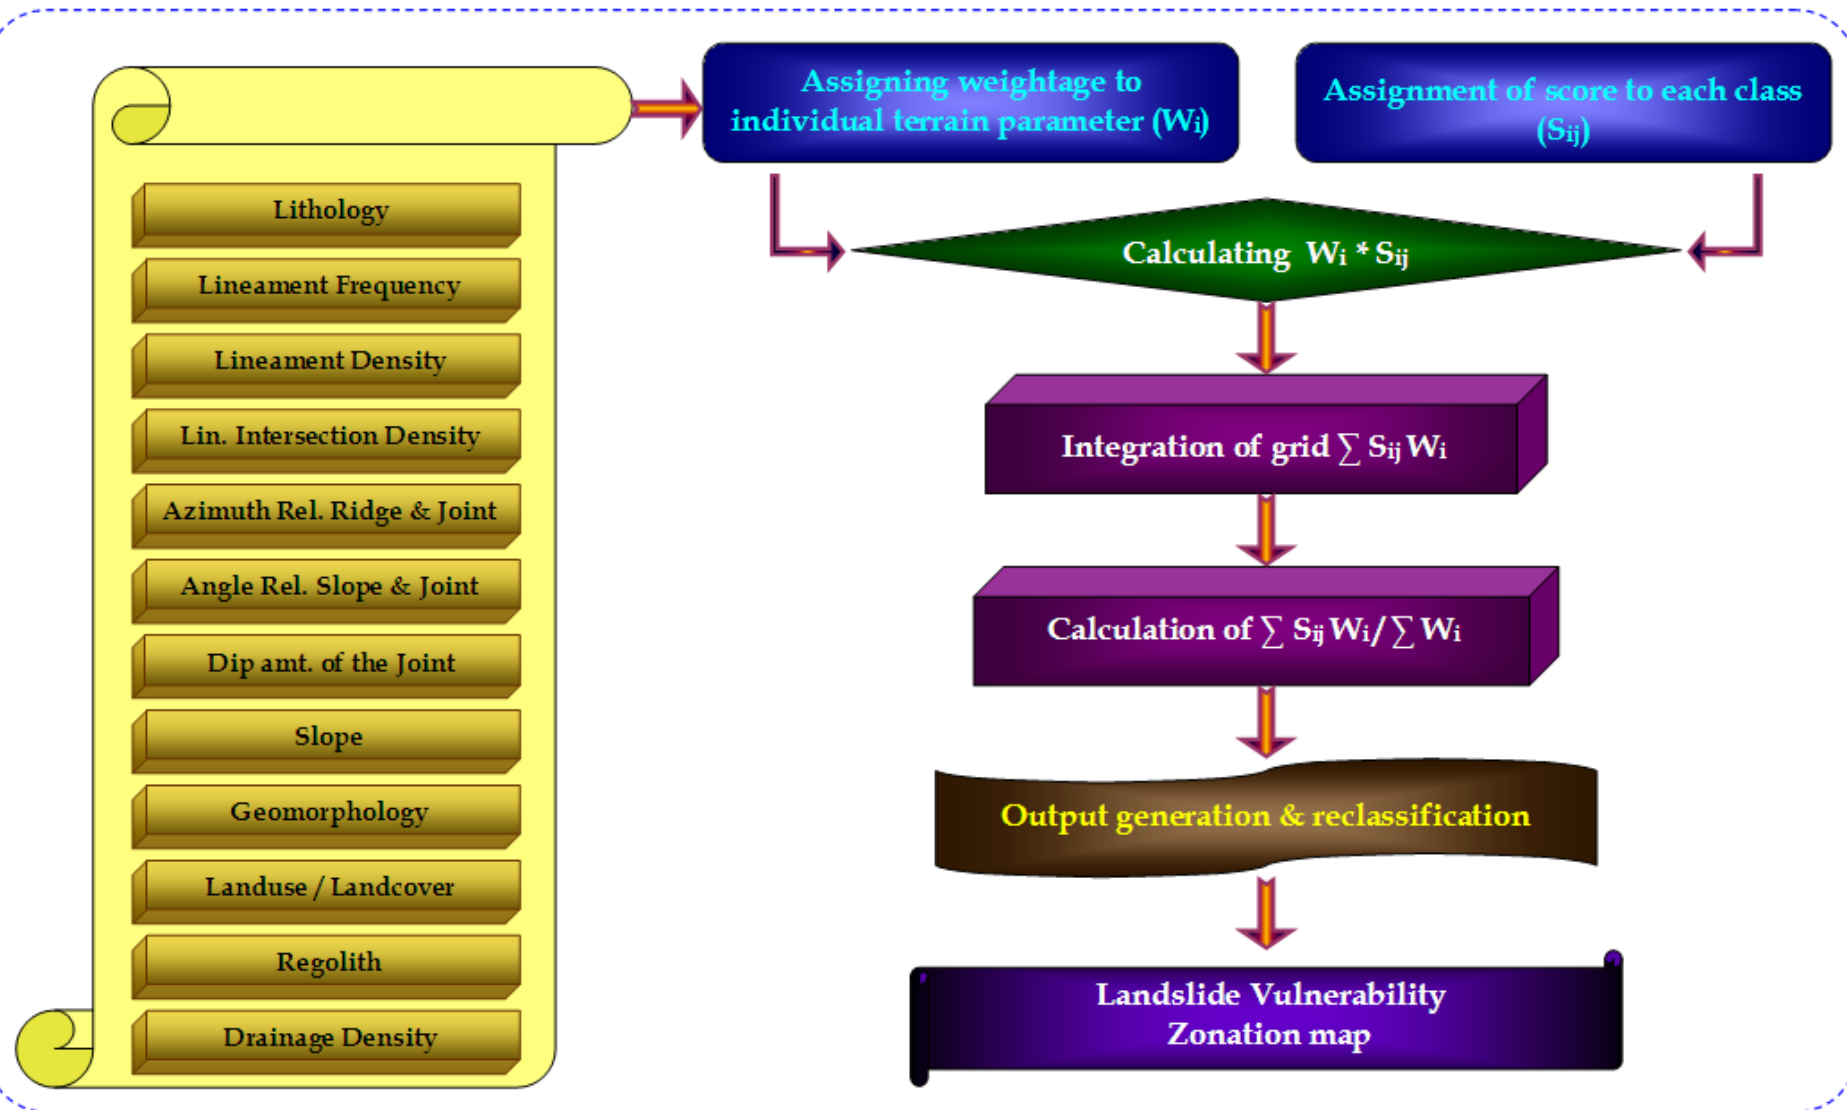

Methodology


- Assignment of ranks to 12 geo-terrain thematic maps.
- Assignment of knowledge based weightages to each sub variables in each thematic map.
- Multiply the weightages of sub variables of the corresponding ranks and assign final weightage.
- Rasterise each weighted 12 thematic layers.
- Execute add function and rescale the final weightages from 0 – 10.
- Group them into 5 classes as 0 – 2 (Very Low), 2 - 4 (Low), 4 – 6 (Moderate), 6 - 8 (High) and 8 – 10 (Very High).

Ranks for 12 Layers

S.No	Parameters	Rank
1	Lithology	6
2	Structure- Azimuthal Relation	8
3	Dip-Slope Relation	8
4	Dip Only	8
5	Lineament Density	7
6	Lineament Frequency	7
7	Lineament Intersection	7
8	Slope	9
9	Geomorphology	7
10	Lu / Lc	6
11	Regolith	6
12	Drainage density	5

Final Weightages for Lithology

S.No	Lithology Class	Weightage	Rank	Final Weightages
1	Highly Weathered Charnockite	10	6	60
2	Moderately Weathered Charnockite	8	6	48
3	Poorly Weathered Charnockite	6	6	36

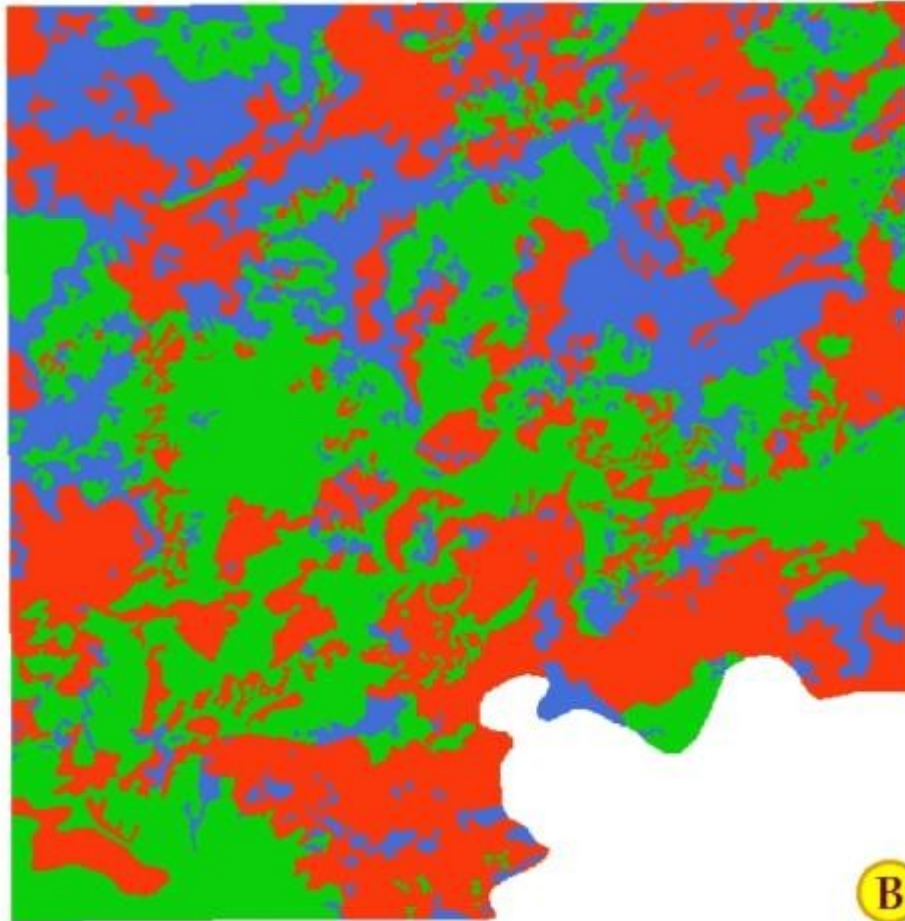

Raster output of Lithology layer

- Lithology pixel with 60 Ls.weightage
- Lithology pixel with 48 Ls.weightage
- Lithology pixel with 36 Ls.weightage

**Weighted
Lithology
Layer –
Index overlay
Method**



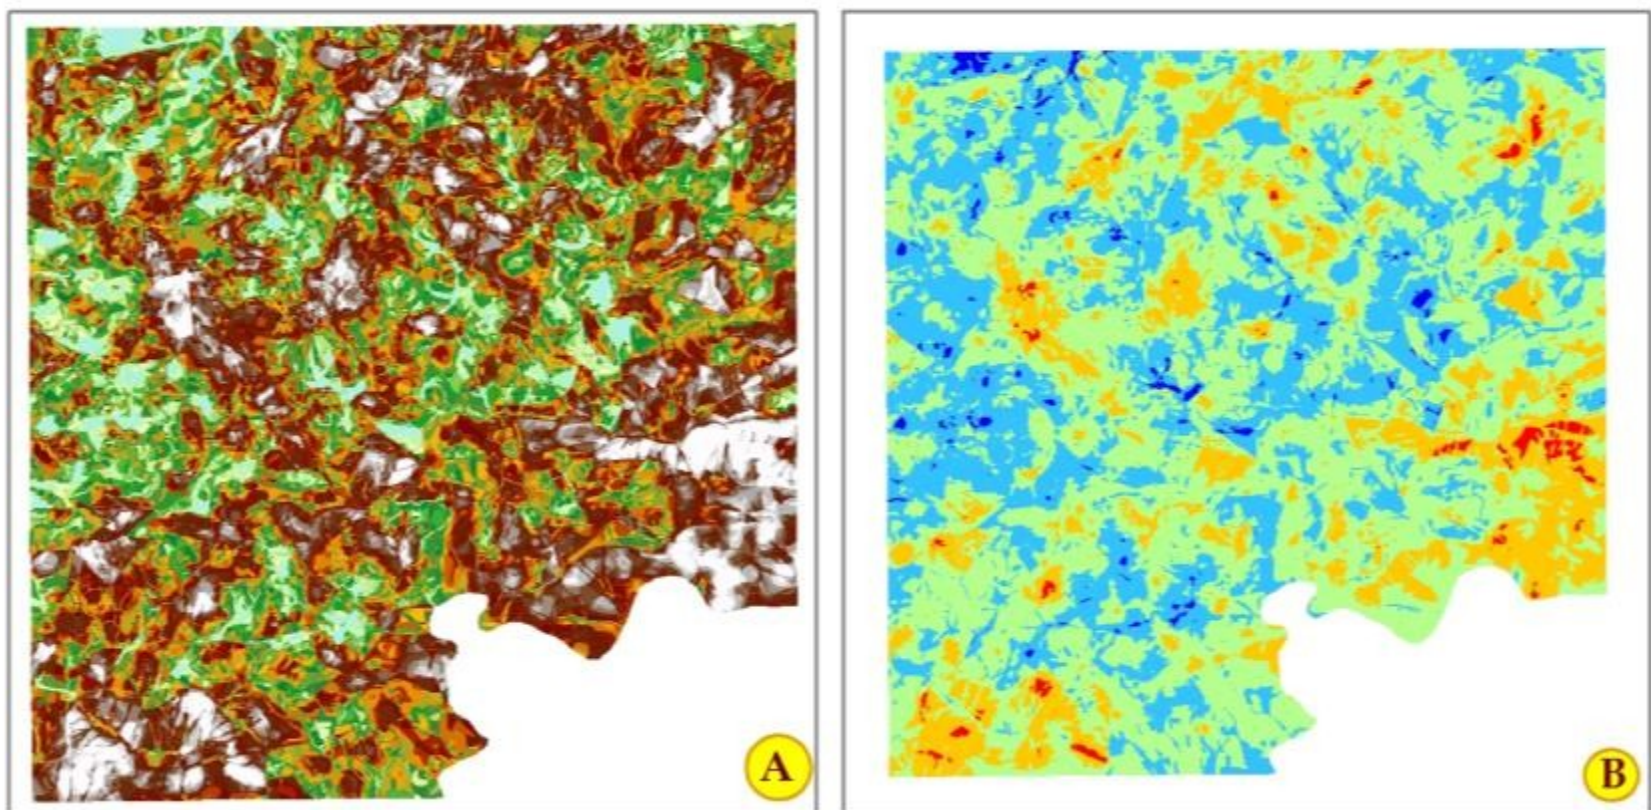


Fig. 22- Index Overlay Method Output(A) and LHZ(B)

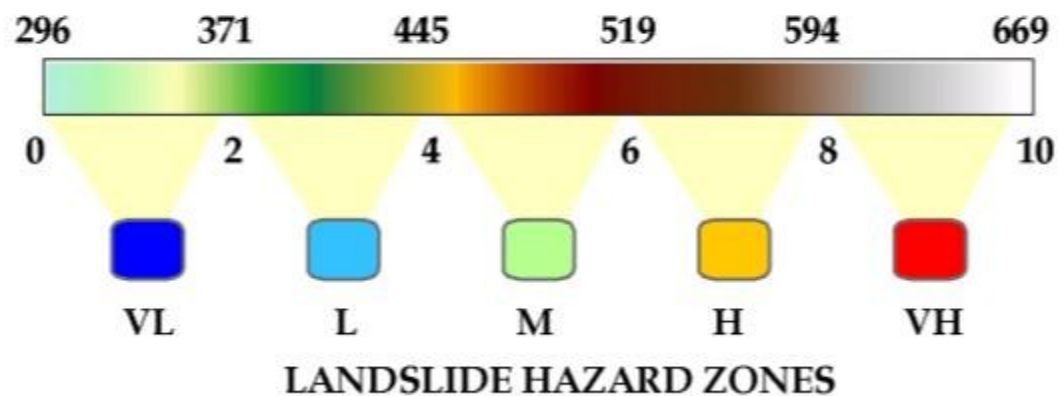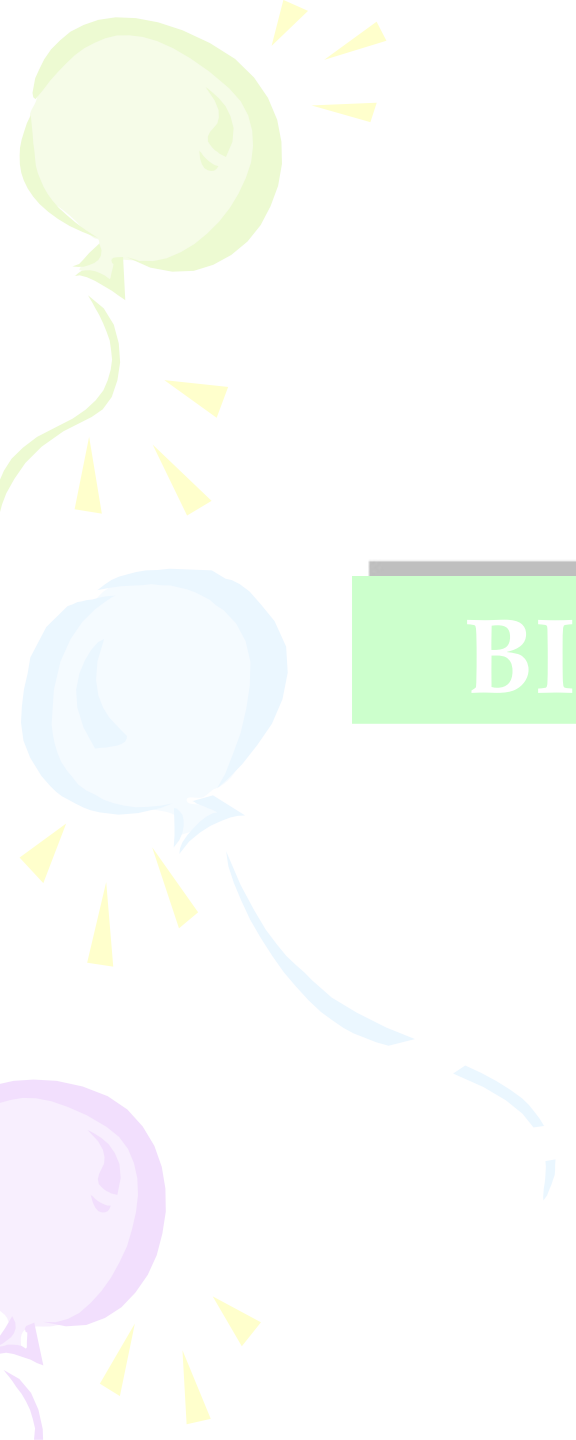


Three balloons (green, blue, and purple) are positioned on the left side of the slide. Each balloon has a string and several small yellow triangular flags attached to it. The green balloon is at the top, the blue one is in the middle, and the purple one is at the bottom.

BIS Method for LHZ

Landslide Hazard Evaluation Factor (LHEF) Rating Scheme

S. No	Causative Factor	Maximum LHEF Rating
1	Lithology	2
2	Structure	2
3	Slope morphometry	2
4	Landuse / Landcover	2
5	Relative relief	1
6	Hydrogeological conditions	1

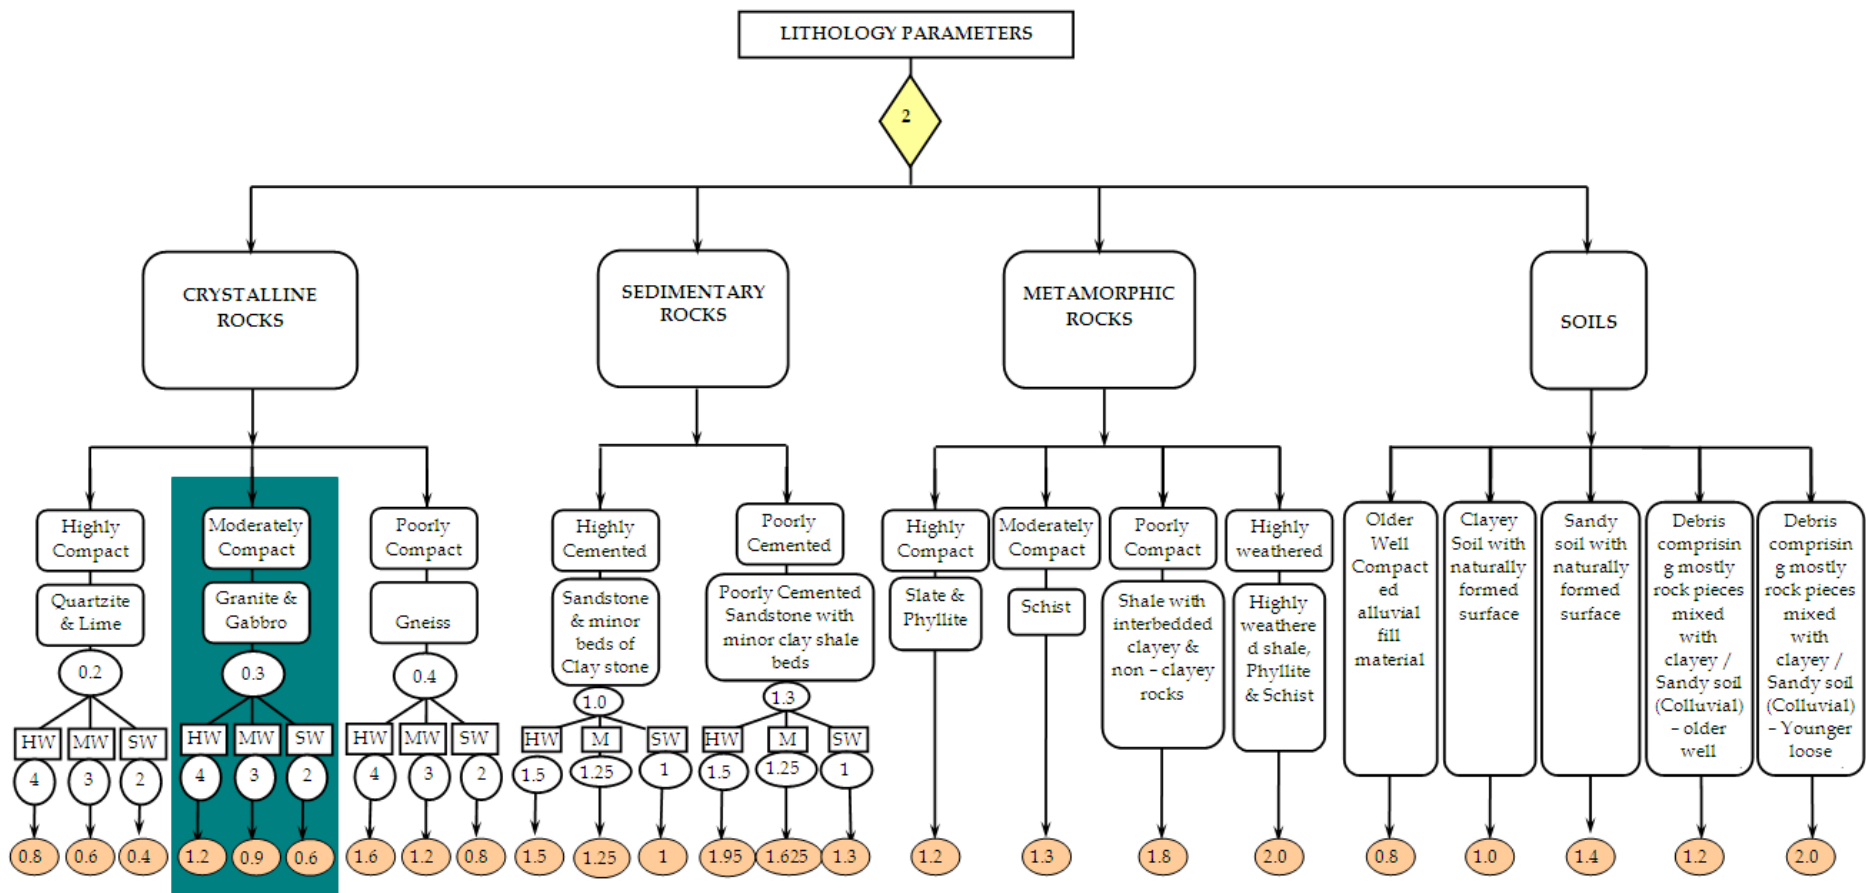

Maximum LHEF Rating of the Lithology Parameter



Cumulative LHEF Rating for the individual sub variable of the Lithology parameter

HW - Highly Weathered MW - Moderately Weathered SW - Slightly Weathered





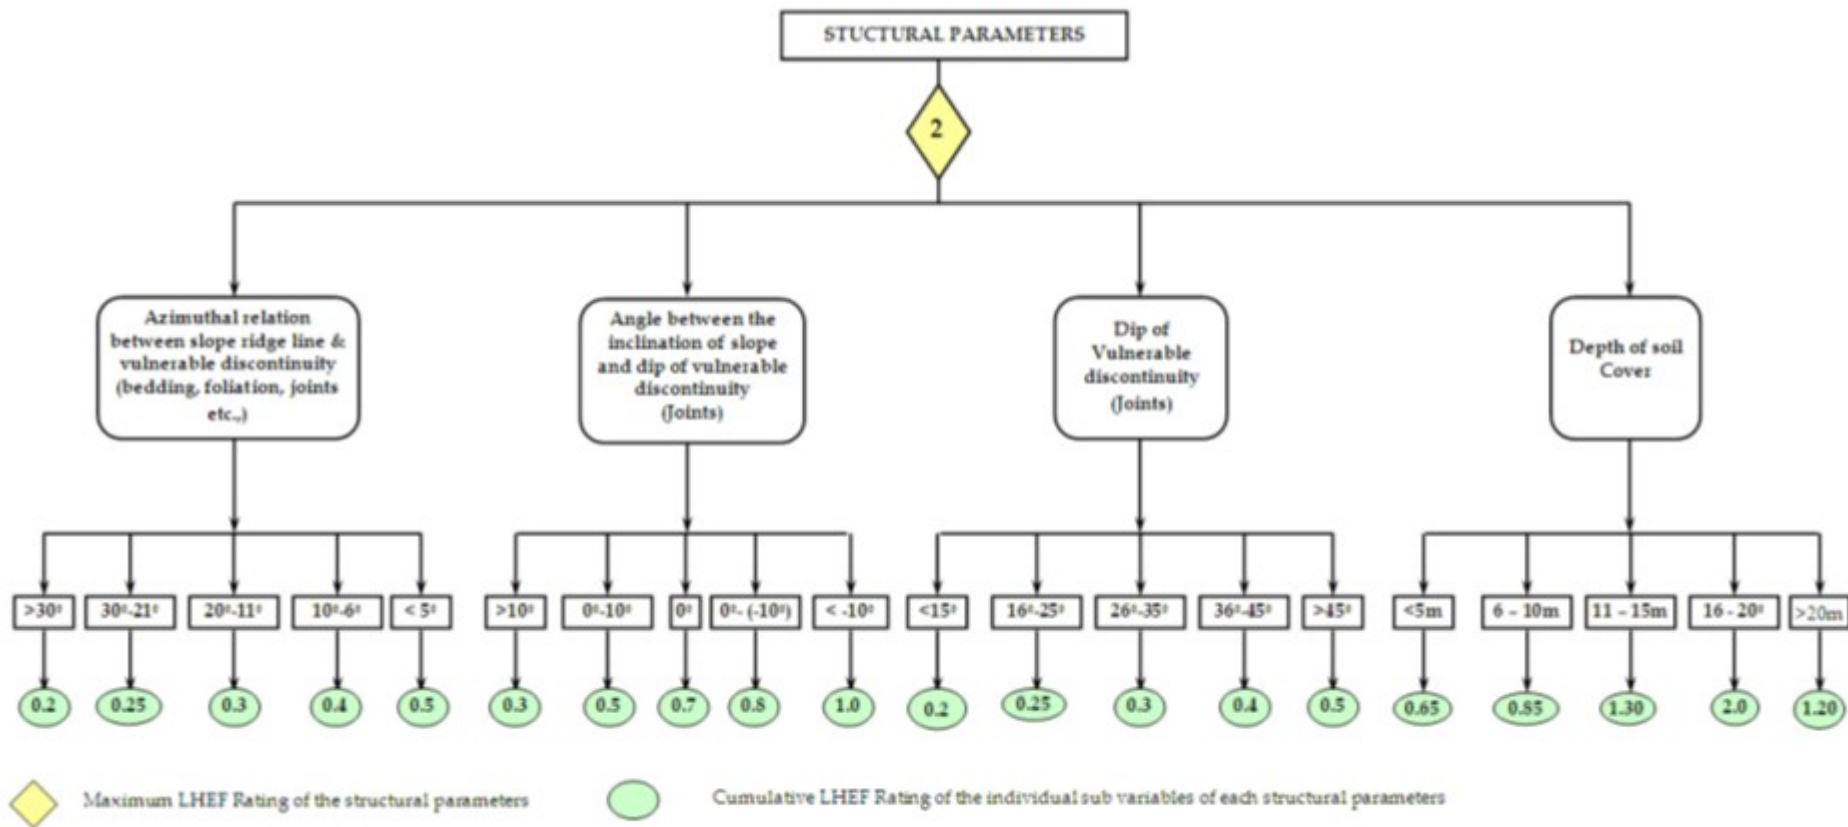



Fig. 4.5 LHEF schemes for Structural Parameters

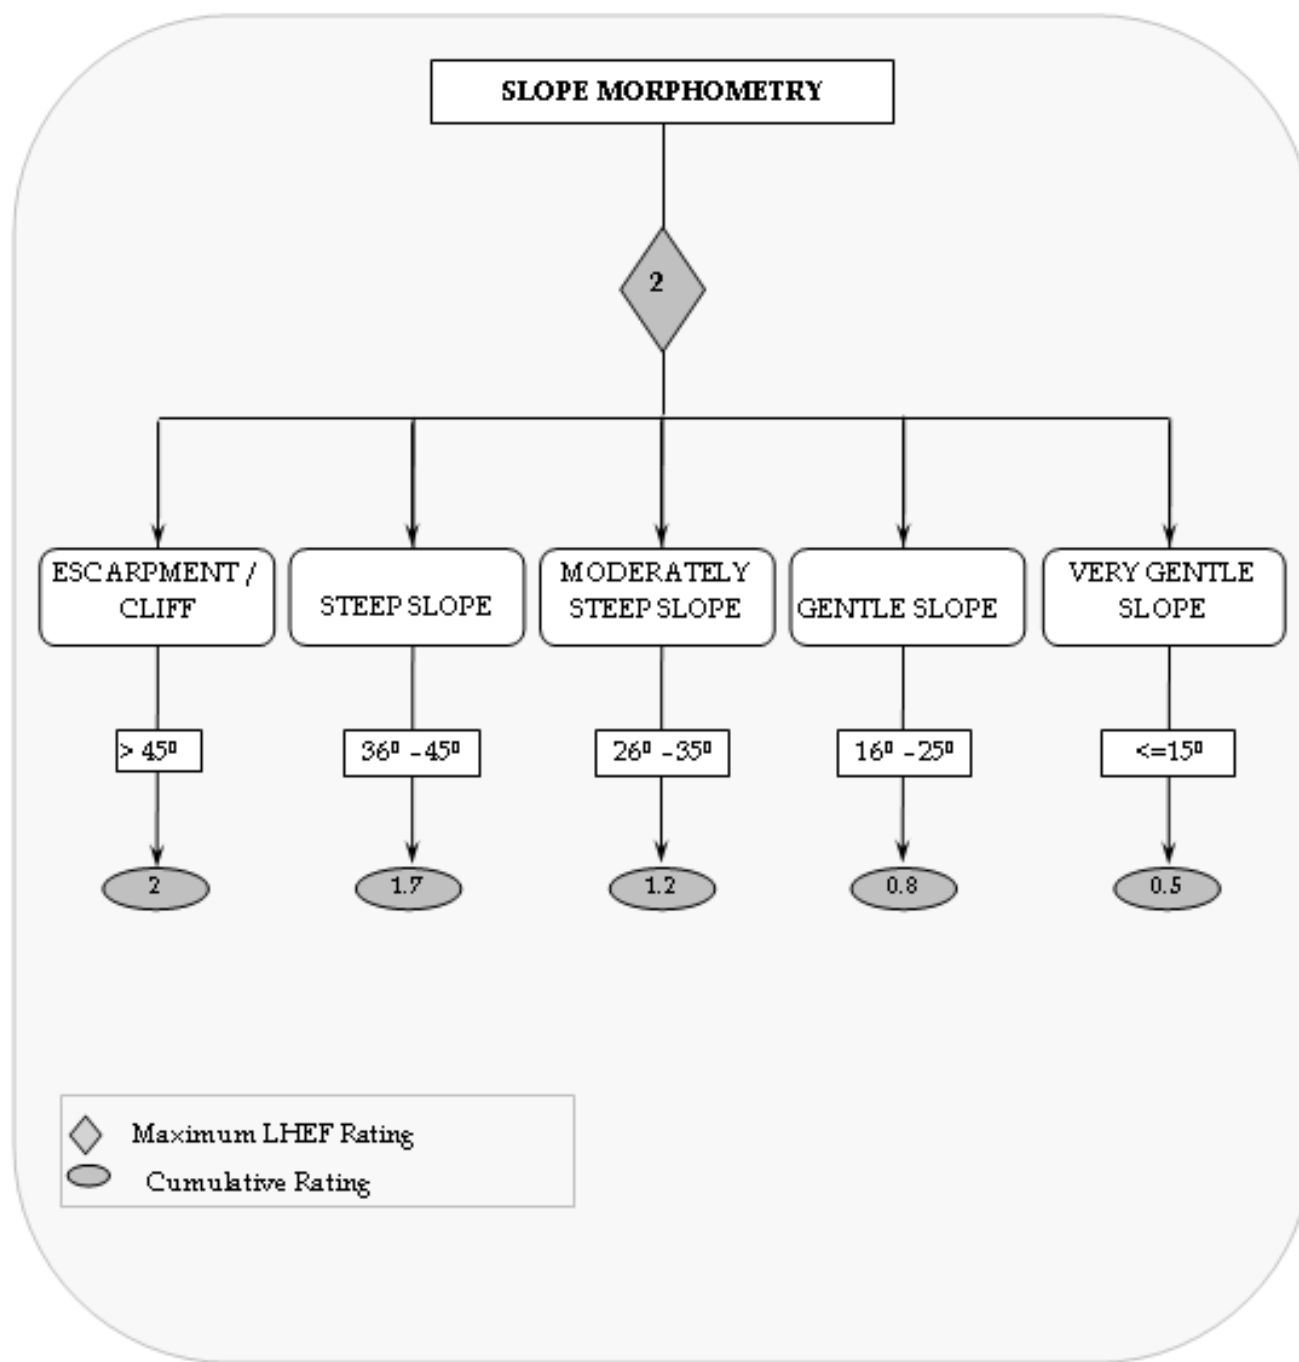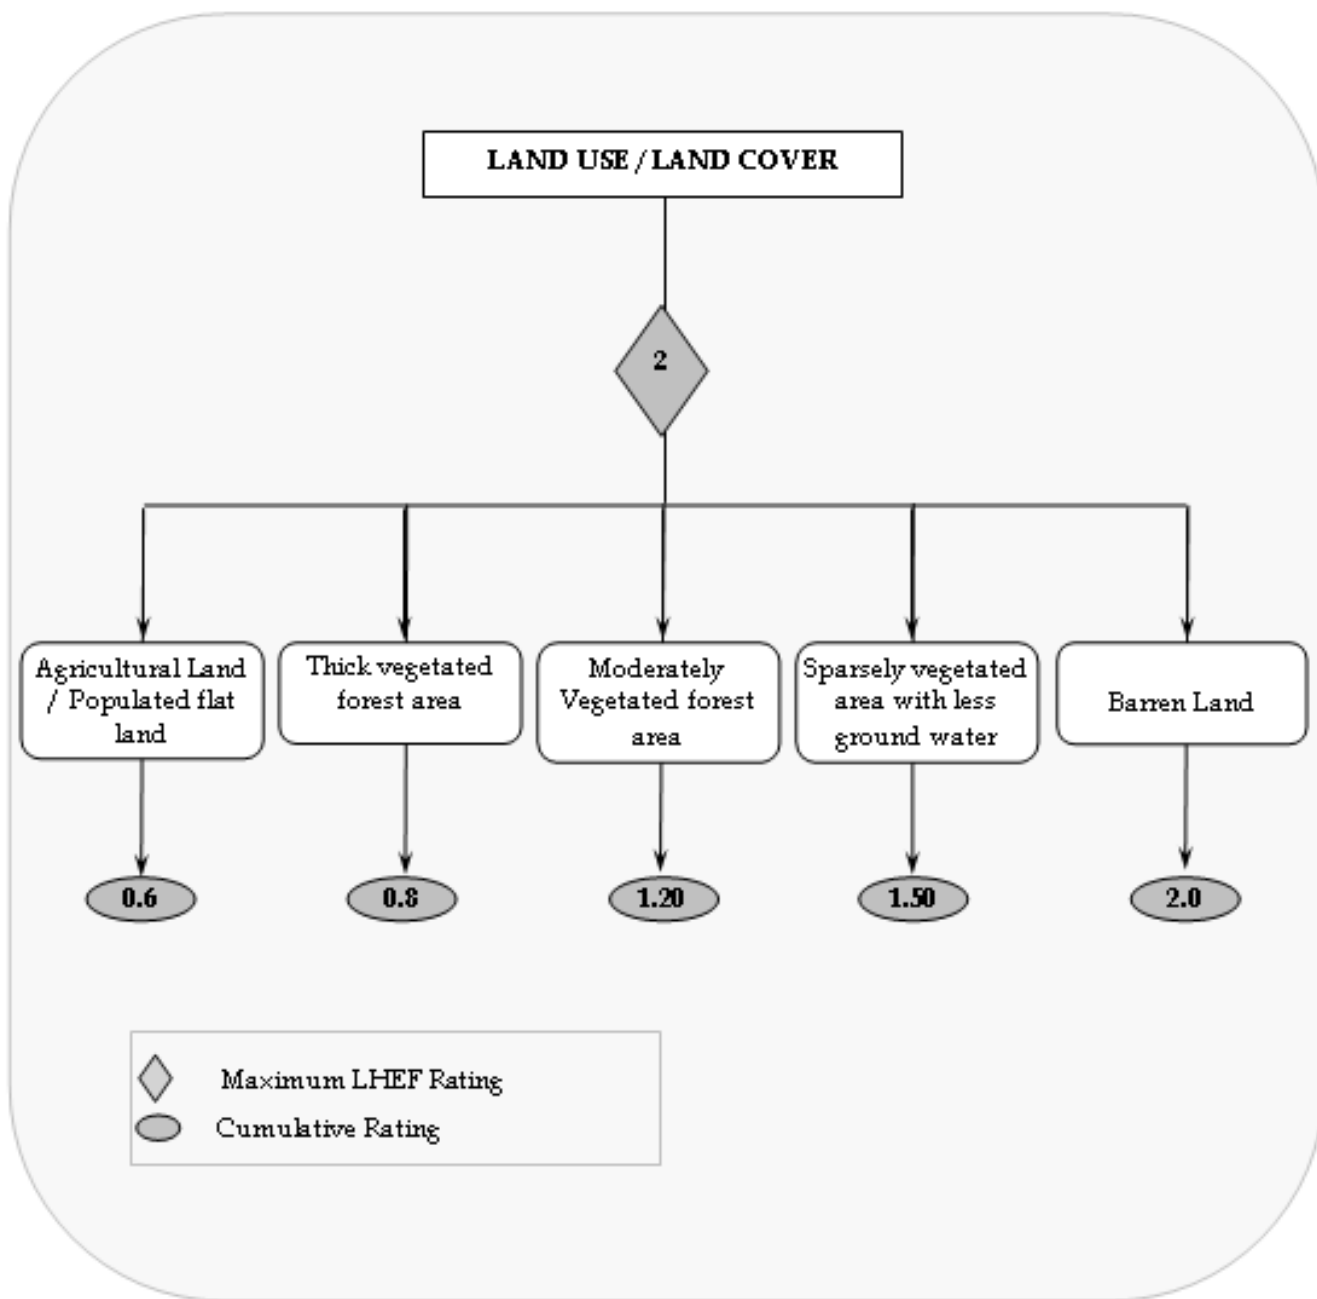

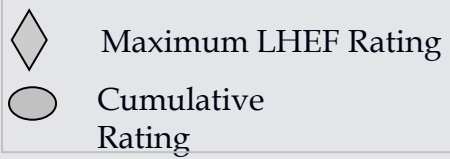


HYDRO - GEOLOGICAL CONDITIONS

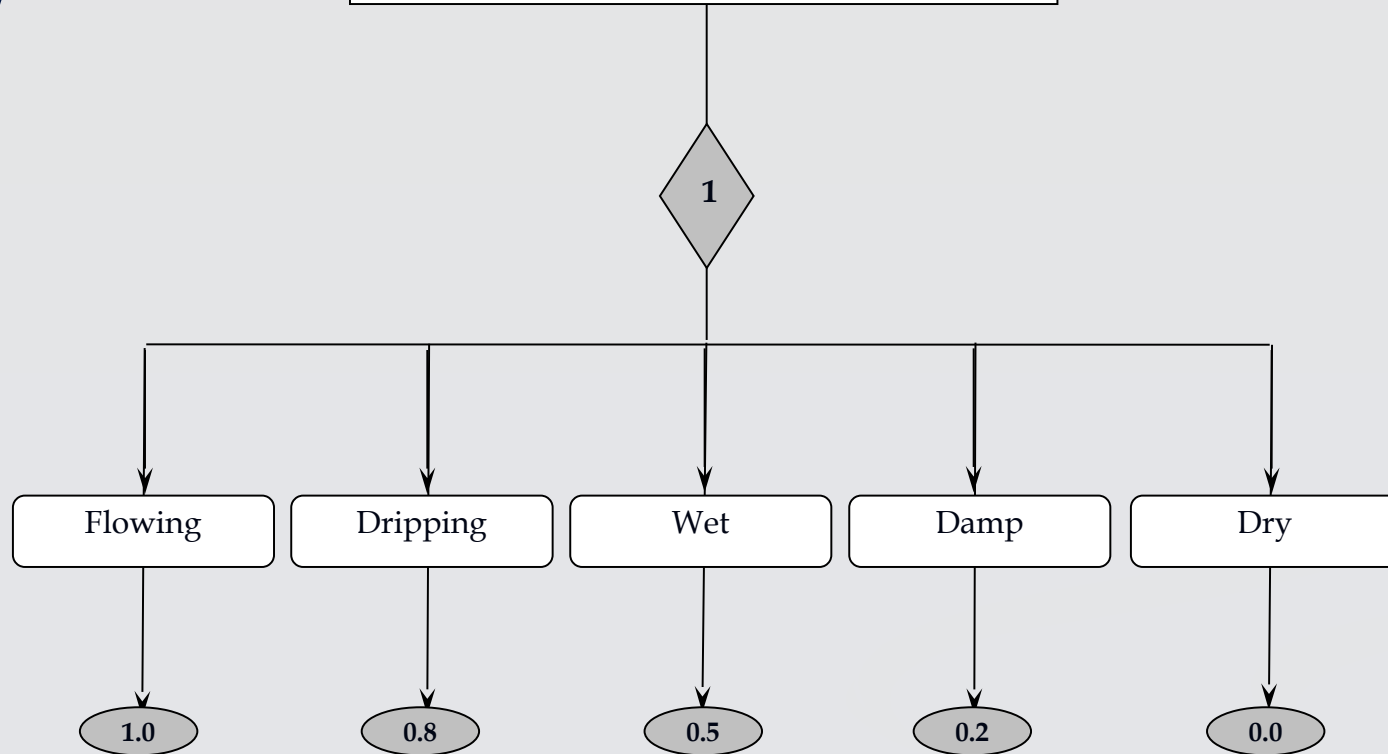


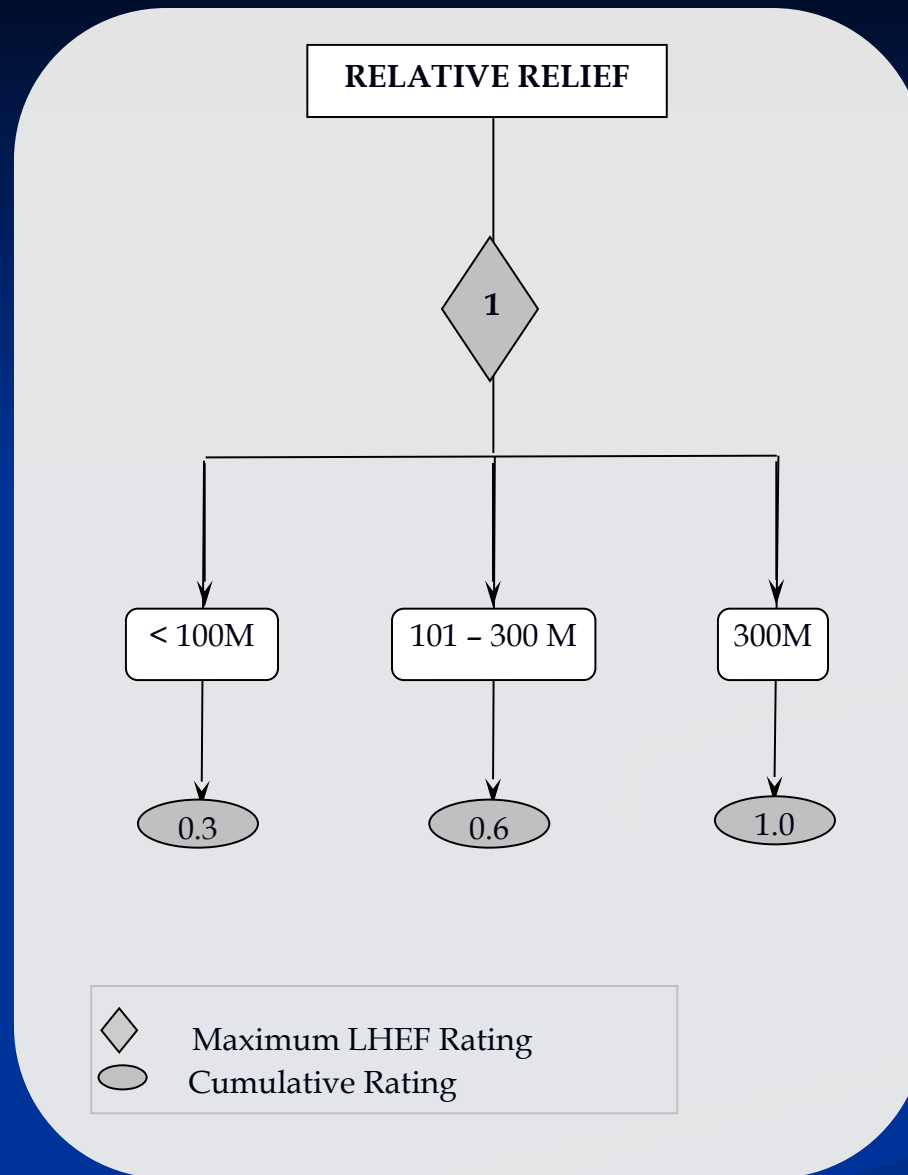

ZONE	THED VALUES	DESCRIPTION OF ZONES
1	< 3.5	Very Low Hazard (Vlh) Zones
2	3.5 To 5.0	Low Hazard (Lh) Zones
3	5.1 To 6.0	Moderate Hazard (Mh) Zones
4	6.1 To 7.5	High Hazard (Hh) Zones
5	>7.5	Very High Hazard (Vhh) Zones

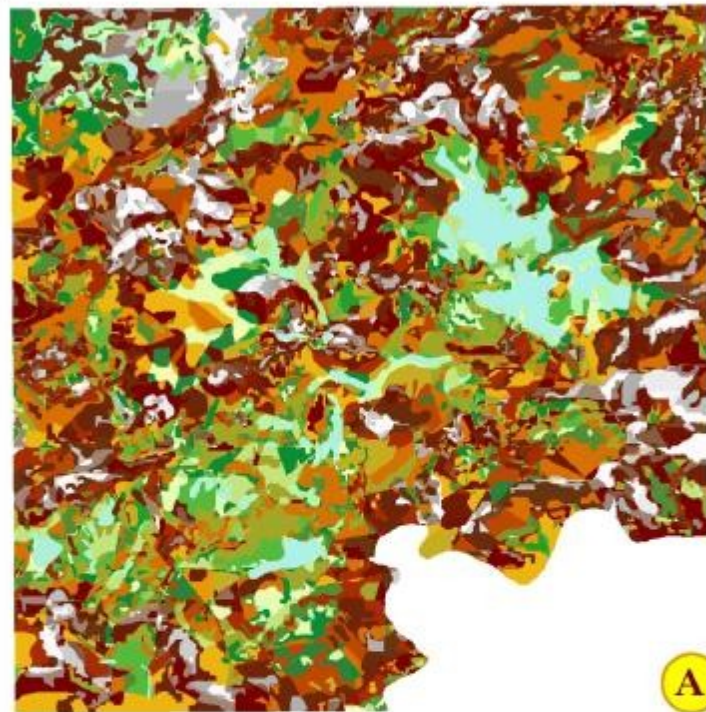

A

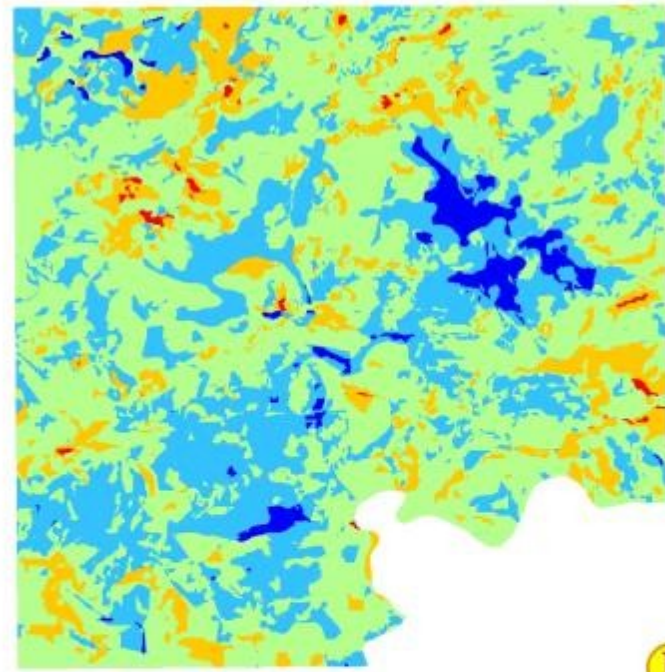

B

Fig. 22- Bureau of Indian Standard Model Output(A) and LHZ(B)

Values ranges from 7.6 to 3.65



VL



L



M



H



VH

LANDSLIDE HAZARD ZONES

FACTOR OF SAFETY

It describe the status of a particular slope and is based on the concept of limiting equilibrium

i.e. The condition at which forces tending to induce sliding are exactly balanced by those forces resisting sliding.

So, F can be defined as the ratio of total force available to resist sliding to total force tending to induce sliding.

$$\text{Factor of safety} = \frac{\text{Total resisting force along plane of separation}}{\text{Total mobilizing force available to induce failure}}$$

$F = 1$: The slope is on the edge of failure,

$F = > 1$: the slope is stable

$F = < 1$: the slope is unstable